

LP 9000 Series

Low Differential Pressure Sensors

- Ranges from 0.1 mbar to 10 bar
- Accuracy better than 0.1% FS BSL
- Line pressure from vacuum to 200 bar
- Uni-directional or bi-directional operation
- Excellent thermal and long term stability
- Full wet/wet media compatibility



The LP 9000 series accurately measure low differential or relative pressure of gases and liquids from 0.1 mbar to 10 bar full scale. With a choice of current or voltage output, they are suitable for uni-directional (e.g. 0 to 20mbar) or bi-directional (e.g. -20 to 20mbar) pressure measurements.

An innovative eddy current measurement system enables the use of low displacement sensor diaphragms operating well within elasticity limits. In addition, the "dry cell" sensor concept means no internal fluid is used. Combined with a rugged design, this ensures high performance with long term reliability, even when operating over a wide temperature range.

The LP 9000 series are therefore ideally suited to a wide range of high precision applications including leak detection, test benches and low flow measurement of liquids and gases amongst many others.

LP 9000 Series



Low Differential Pressure Sensors

STANDARD SPECIFICATIONS

Pressure Measurement

Operating Pressure Ranges

Range (mbar)	0.1*	0.2*	0.5*	1	2	5	10
Overpressure (mbar)	50	50	50	100	100	500	700
Range (mbar)	20	50	100	200	500		
Overpressure (bar)	1	2	3	4	5		
Range (bar)	1	2	5	10			
Overpressure (bar)	10	10	20	30			

*Note: Beryllium Copper diaphragm only. Other pressure units may be specified.

Zero and Span Adjustment

Zero $\pm 15\%$ F.S., Span $\pm 20\%$ F.S.

Line Pressure

Vacuum to 50 bar (ranges up to 10mbar)

Vacuum to 200 bar (ranges 20mbar and above).

Pressure Media

Fluids compatible with either:-

(A) 316L stainless steel, X750/600 Inconel and

Loctite Masterjoint 510 or

(B) 316L stainless, beryllium copper, brass, soft soldering and Loctite Masterjoint 510.

Supply Voltage

10 - 30 Vd.c.

15 - 30 Vd.c. (LPM with 0 - 10 Vd.c. output)

± 12 Vd.c. (LPM with 0 ± 5 Vd.c. output).

Output Signal

LPX (uni-directional): 4 - 20mA (2 wire).

LPX (bi-directional): 12 ± 8 mA (2 wire).

LPM (uni-directional): 0 - 5 Vd.c. (3 wire).

0 - 10 Vd.c. (3 wire).

LPM (bi-directional): 2.5V ± 2.5 V (3 wire).

0 ± 5 Vd.c. (4 wire)

5 ± 5 Vd.c. (3 wire).

Load Impedance

LPX: 0.05 (Vsupply - 10) k Ω maximum.

LPM: 5k Ω minimum.

Performance

Accuracy

Combined Non-Linearity, Hysteresis and Repeatability: $\pm 0.1\%$ F.S. BSL maximum.

Long Term Stability

At standard reference conditions, calibration will not change by more than 0.1% F.S./annum.

Temperature Range

Ambient: -40° to 100°C

Process media: -40° to 120°C

Storage: -50° to 110°C

Temperature Effects

Output deviation over -20° to 80°C will not exceed the following values:-

Zero: 0.01% F.S./°C

Span: 0.01% F.S./°C

Static Pressure Effect

Zero Effect: <0.5% F.S./50 bar

Span Effect: <0.35% of reading/50 bar.

Note: These errors are repeatable/reversible, eliminated by adjusting zero at line pressure.

Mounting Position Effect

No effect on span. Possible zero shift can be corrected via the adjustment potentiometer.

Supply Sensitivity

0.01% F.S./Volt maximum.

Vibration Effect

<0.05% F.S./g from 20Hz to 500Hz in any position.

Response Time

10 msec.

Humidity

Up to 100% RH non-condensing.

Physical

Pressure Connections

G $^{1/8}$ female.

Purge Ports

G $^{1/8}$ female.

Purge Screws

316L stainless steel.

Electrical Connection

Screw terminal block under cover plate except Intrinsically Safe versions which have lid-mounted Jaeger connector. Maximum wire area 4mm 2 via PG7 cable gland (cable diameter 4 to 7mm).

Housing Material

316L stainless steel.

Environmental protection: IP66.

CE Conformity

EMC Emissions: EN50081-1

EMC Immunity: EN50082-1

Certification: CE marked.

Weight

2Kg nominal.

OPTIONS

(A) Panel Mounting Bracket

(B) Remote Electronics

For severe environments such as high temperatures, very low temperatures, ionising radiation. Please refer to manufacturer.

(C) Hazardous Area Approvals

(4-20mA output only - supplied as model code GA)

CENELEC Intrinsic Safety Certification:

EEx ia IIC T6 (Ta = 60°C)

EEx ia IIC T5 (Ta = 80°C).

RELATED PRODUCTS

Druck manufacture a comprehensive range of pressure transducers, transmitters, indicators, controllers and calibrators. The range of portable calibrators also covers temperature and electrical parameters.

Please refer to manufacturer for further information and data sheets.

CALIBRATION STANDARDS

Instruments manufactured by Druck Limited are calibrated against precision pressure calibration equipment which is traceable to International Standards.

ORDERING INFORMATION

(1) Select Model Number:


Code	Model
LPX	Current output
LPM	Voltage output
	Code
	9 Base model
	Code Diaphragm Material
	3 Inconel X 750
	4 Beryllium copper
	Code Electrical Connection
	8 Cable gland, PG7
	Code Temp.Comp
	1 -20 to 80°C
LPX	9 3 8 1

(2) State minimum and maximum pressure and corresponding output signal.

(3) State options (if required).

Continuing development sometimes necessitates specification changes without notice.

INSTALLATION DRAWINGS - Dimensions in mm

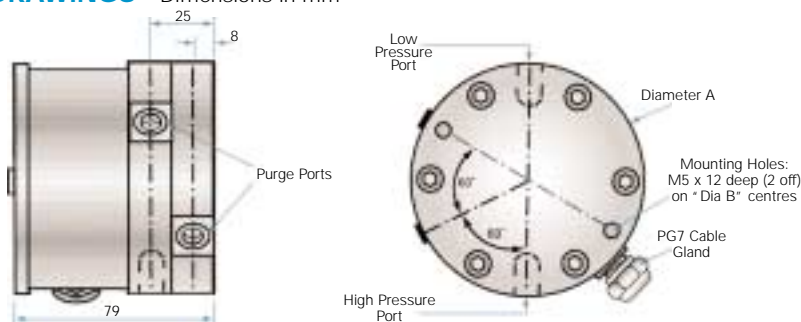

Range	Dia A	Dia B
Up to 10mbar	94	84
20mbar and above	84	68

Druck Limited

Fir Tree Lane, Groby
Leicester, LE6 0FH, England

Tel: +44 (0) 116 231 7100

Fax: +44 (0) 116 231 7103

E-Mail: sales@druck.com

Internet: www.druck.com



0221



Agent:

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382