

PDCR 330

Aerospace Pressure Transducer

- FAA & CAA flight certified to TSO C47
- Small lightweight packaging
- Wide temperature operation
- High accuracy and stability
- High proof and burst pressure ratings
- Affordable solution with low technical risk



The PDCR 330 is a low level (millivolt) output flight certified pressure transducer which meets the demands of the modern aerospace industry.

The sensing element is an advanced micro-machined integrated silicon chip which, together with the latest compensation techniques, provides exceptional measurement performance across the entire aircraft environment.

Pressure media is isolated from the silicon sensing element by a highly compliant diaphragm and fluid filling. This provides compatibility with hostile media and high proof/burst pressure ratings.

The small lightweight package has low acceleration sensitivity, fast frequency response and is compliant with the most demanding vibration and shock requirements. CAA and FAA flight certification can be specified.

Available in both standard and custom formats, the PDCR 330 is used extensively for ground/flight test and programme fit applications throughout the engine, cockpit and airframe.

PDCR 330



Aerospace Pressure Transducer

STANDARD SPECIFICATIONS

Pressure Measurement

Operating Pressure Ranges

350mbar, 700mbar, 1, 1.5, 2, 3.5, 5, 7, 10, 15, 20, 35, 60 and 70 bar gauge or absolute.
135, 200, 300, 350, 500 and 700 bar sealed gauge or absolute.

Overpressure

The rated pressure range can be exceeded by the following values without calibration change:
4 x or 140 bar (whichever less) for ranges up to 70 bar.
2 x or 1400 bar (whichever less) for ranges 135 to 700 bar.

Pressure Containment

The transducers will contain without leakage:
140 bar for absolute ranges up to 70 bar.
1400 bar for sealed gauge and absolute ranges between 135 and 700 bar.

Pressure Media

Fluids compatible with Stainless Steel 316L and Hastelloy C276.

Excitation/Supply Voltage

10Vd.c. at 5mA nominal.
Others can be specified e.g. 5V d.c. for 50mV output span etc. For non regulated excitation (proportional output) refer to Druck.

Output Voltage

50mV for 350mbar range.
100mV for 700mbar range and above.
Others can be specified e.g. between 20mV and 200mV F.S. - refer to Druck.

Common Mode Voltage

Typically +6V to +8.5V wih respect to the -ve supply at 10V d.c. excitation.

Output Impedance

2000Ω nominal.

Performance

Accuracy

Combined Non-linearity, Hysteresis and Repeatability:
±0.1% B.S.L. for ranges up to 60 bar.
±0.2% B.S.L. for 70 bar range.
±0.75% B.S.L. for 135 to 700 bar ranges.

Zero Offset and Span Setting

±3mV maximum.

Long Term Stability

Typically 0.1mV.

Operating Temperature Range

-54 to 150°C.

Temperature Effects

Temperature Error Band (T.E.B.) or average coefficients (%F.S./°C) shown include thermal zero shift, sensitivity shift and thermal hysteresis:
-54° to 120°C: ±2.5% T.E.B. or ±0.015 F.S./°C.
Improved performance available for 700mbar range and above - refer to Druck.

Vibration Sensitivity

Response less than 0.05% F.S./g at 30g peak 10Hz - 2kHz, limited by 12mm double amplitude. (MILSTD 810C Proc 514.2-2 Curve L).

Acceleration Sensitivity

Typically 0.02% F.S./g for 350mbar decreasing to 0.00035 F.S./g for ranges above 60 bar, along the sensitive axis.

Mechanical Shock

1000g 1ms half sine pulse in 3 mutually perpendicular axes will not affect performance.

Physical

Pressure Connections

7/16" UNJF thread, 74 degree cone generally to MS 33656-4 (AS4395-4).
Alternative pressure connections available to order - refer to Druck.

Electrical Connections

6 pin bayonet fixed plug to MIL-C-26482 or DEF 5325 shell size 10.
Mating socket not supplied but available to order. MIL-C-38999 electrical connection or integral cable assembly available - refer to Druck.

Weight

120grams nominal.

OPTIONS

- (A) Remote 'R' cal by external resistor.
- (B) Ranges below 350mbar.
- (C) Differential pressure measurement.
- (D) Amplified output from 24-32V d.c. supply.

CALIBRATION STANDARDS

Pressure transducers manufactured by Druck are calibrated against precision pressure calibration equipment which is traceable to International Standards. A statement of conformity is supplied as standard.


ORDERING INFORMATION

Please state the following:

- (1) Model number (PDCR 330).
- (2) Pressure range and units.
- (3) Gauge, sealed gauge or absolute.
- (4) Pressure connection.
- (5) Options (if required).

Continuing development sometimes necessitates specification changes without notice.

INSTALLATION DRAWINGS - Dimensions in mm

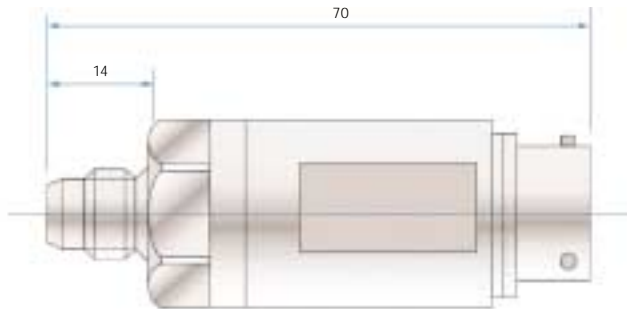

Electrical Connection

- PIN A Supply positive
- PIN B Output positive
- PIN C Output negative
- PIN D Supply negative

Druck Limited

Fir Tree Lane, Groby
Leicester, LE6 0FH, England

Tel: +44 (0) 116 231 7100
Fax: +44 (0) 116 231 7103
E-Mail: sales@druck.com
Internet: www.druck.com



Agent:

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382