

**Druck**

## PTX 7800 Series

### Pressure Transmitters

- Standard ranges or custom scaled
- Gauge and absolute configurations
- Hastelloy and stainless steel wetted parts
- RFI protected to CE Heavy Industrial standard
- ATEX Intrinsically Safe and Flameproof versions available
- Compact, rugged and lightweight




The PTX 7800 series combines modular design with the latest advances in ASIC technology and surface mounted electronics. This provides a lightweight and cost effective alternative to pressure gauges and switches in process industry applications.

At the heart of the transmitter is Druck's own piezo-resistive silicon sensor. This technology is extensively qualified and proven, for example in aerospace and subsea programmes which demand the highest levels of performance and long term reliability.

The sensor features a Hastelloy isolation diaphragm and is enclosed in an electron beam welded stainless steel body. This rugged construction ensures full compatibility with a wide range of pressure media and operating conditions.

The PTX 7800 pressure transmitter also offers excellent RFI immunity, meeting the highest level of CE marking requirements for heavy industrial use.

# PTX 7800 Series



## Pressure Transmitters

### STANDARD SPECIFICATIONS

#### Pressure Measurement

##### Operating Pressure Ranges

0 to 70mbar gauge, 100, 160, 250mbar, 500mbar, 1, 2, 3.5, 7, 10, 20, 35, 70 bar gauge and absolute. 0 to 140, 200, 350, 700 bar sealed gauge and absolute. Compound ranges available on request. *Note: Any pressure unit and span can be specified between 70mbar and 700 bar F.S.*

##### Overpressure

The operating pressure range can be exceeded by the following values without degrading performance:

- 14 x FS for 70mbar range
- 12 x FS for 100mbar range
- 8 x FS for 160mbar range
- 6 x FS for ranges 250 and 500mbar
- 4 x FS for ranges 1 and 2 bar
- 3 x FS (200 bar max) for ranges 3.5 to 140 bar
- 2 x FS (1000 bar max) for ranges 200 to 700 bar

##### Pressure Containment

Gauge ranges:

- 20 x FS for 70mbar and over
- 16 x FS for 100mbar range
- 12 x FS for 160 bar range
- 8 x FS for gauge ranges 250 and 500mbar
- 6 x FS for gauge ranges 1 and 2 bar
- 4 x FS (250 bar max) for gauge ranges 3.5 to 70 bar
- 250 bar for absolute ranges 100mbar to 140 bar.
- 1000 bar for 200 bar to 700 bar ranges

##### Pressure Media

Fluids compatible with a welded assembly of 316L stainless steel and Hastelloy C276. (NACE compatible grades).

##### Supply Voltage

9 to 30V at the transmitter terminals. (9 to 28V for IS units). Maximum load ( $\Omega$ ) =  $50 \times (\text{Supply Voltage} - 9)$ .

##### Supply Sensitivity

0.005% F.S./Volt.

##### Insulation Resistance

>10M $\Omega$  @ 500 Vd.c. (@ 20°C).

##### Surge Protection

Ranges up to 140 bar: withstands 2kV spike. Ranges above 140 bar: withstands 1kV spike. Spike test conforms to EN61000-4-5.

##### Output Current

4 - 20mA (2-wire) proportional for zero to full scale pressure.

##### Performance Accuracy

$\pm 0.25\%$  F.S. Combined Non-linearity, Hysteresis and Repeatability.

##### Long Term Stability

At standard reference conditions the calibration will not change by more than 0.1% F.S. per year.

##### Operating Temperature Range

Ambient: -40 to 100°C; Process: -40 to 120°C

##### Temperature Effects

For ranges 500mbar and above, the output will not deviate from room temperature calibration by more than:-

- 1% F.S. over -10° to 50°C (0.7% F.S. typical)
- 2% F.S. over -20° to 80°C (1.5% F.S. typical)

*For ranges below 500mbar, these values will increase pro-rata with span.*

##### Physical

##### Pressure Connection

G $1/4$  female, G $1/2$  male to BS EN387-1 (DIN 16288) or  $1/2$  NPT male.

##### Electrical Connection

M20 male conduit fitting with 1m integral cable.

##### Ingress Protection

Designed to meet IP67 when properly installed with conduit fitting connection.

##### Weight

200 grams nominal.

### OPTIONS

**(O) Standard** - CE Category 1 Pressure Accessory to Pressure Equipment directive (PED) 97/23/EC. Note: 'Operating Pressure Range' is equivalent to maximum working pressure (Ps) as referred to in the PED

**(I) Intrinsically Safe Approval**

CE 0600 II 1G EExia IIC T4 (Ta = 80°C) to ATEX directive 94/9/EC

**(D) Flameproof Approval**

CE 0600 II 2G EExd IIC T6 (Ta = 70°C) to ATEX directive 94/9/EC

All options are compliant with EMC Directive 89/336/EEC

EMC Emissions: EN50081-1, EN55022  
EMC Immunity: EN61000-6-2: 1999 (10V/m Heavy Industrial).

### ORDERING INFORMATION


(1) Select model number:

Code	Model
PTX 7800	Base Model
Code	Pressure Connection
1	G $1/4$ Female
2	G $1/2$ Male to BS EN387-1
4	$1/2$ NPT Male
Code	Approvals
0	None
I	ATEX Intrinsically Safe
D	ATEX Flameproof
PTX 7800 - 1	- D Typical Model No.

(2) State pressure range/units  
(3) State cable length (for lengths > 1metre)

**Continuing development sometimes necessitates specification changes without notice.**

### INSTALLATION DRAWINGS - Dimensions in mm

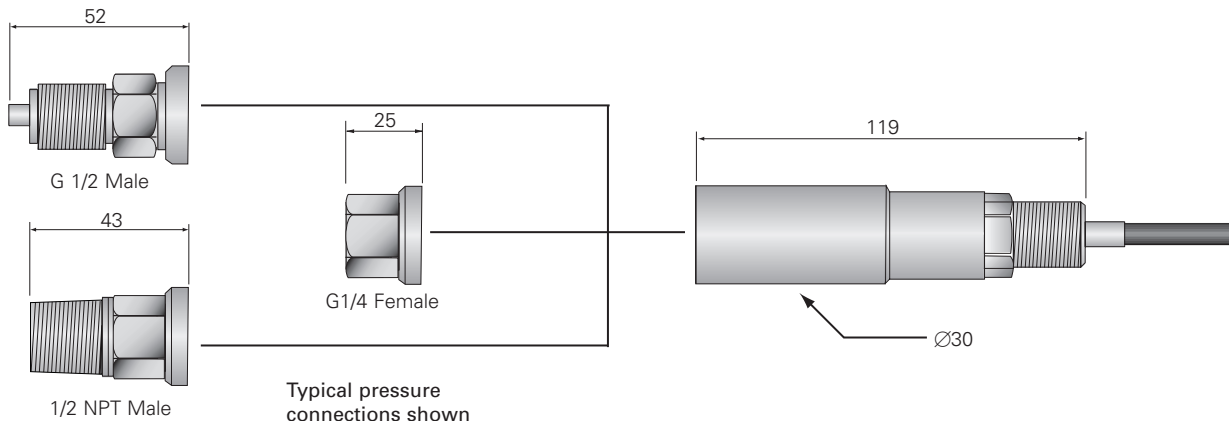

#### Druck Limited

Fir Tree Lane, Groby  
Leicester, LE6 0FH, UK

Tel: +44 (0) 116 231 7100  
Fax: +44 (0) 116 231 7103  
E-Mail: sales@druck.com  
Internet: www.druck.com



0221



Agent:

**SUNSTAR 商斯达实业集团**是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: [SUNS8888@hotmail.com](mailto:SUNS8888@hotmail.com)

邮编：518033 E-mail:[szss20@163.com](mailto:szss20@163.com) QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382