

This datasheet describes the use & performance of the MiCS-5525 sensor. The package and the mode of operation illustrated in this document targets the detection of carbon monoxide (CO).

FEATURES

- Low heater current
- Wide detection range
- Wide temperature range
- High sensitivity
- Miniature dimensions
- High resistance to shocks and vibrations
- Charcoal filter to improve selectivity to CO

OPERATING MODE


The recommended mode of operation is constant power. The nominal power is $P_H = 76 \text{ mW}$. The resulting temperature of the sensing layer is $\sim 340 \text{ }^\circ\text{C}$, in air at an ambient temperature of $\sim 20 \text{ }^\circ\text{C}$.

Detection of the pollution gases is achieved by measuring the sensing resistance of the sensor. The resistance decreases in the presence of CO.

SENSOR CONFIGURATION

The silicon gas sensor structure consists of an accurately micro machined diaphragm with an embedded heating resistor and the sensing layer on top.

The internal connections are shown below:



Pin	Connection
1	Heater ground
2	Sensor pin
3	Heater power
4	Sensor pin

Figure 1: Equivalent circuit of MiCS-5525 (top view)



Product shown with cap containing charcoal filter

POWER CIRCUIT EXAMPLE

The heating voltage V_H can be applied by applying V_{CC} (5V) to an $82 \text{ } \Omega$ resistor connected to pin 3 and pin 1 is connected to GND. This resistor is necessary to obtain the right heater power (2.4 V and 76 mW).

SENSOR CHARACTERISTICS

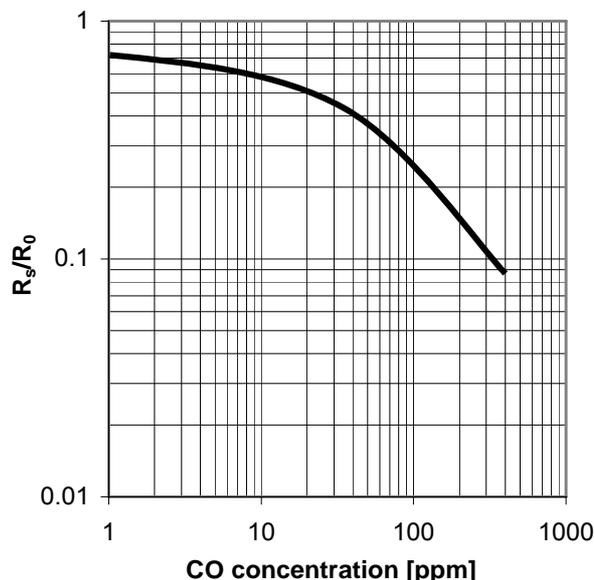


Figure 2: R_s/R_0 as a function of CO concentration at 40% RH and $25 \text{ }^\circ\text{C}$, measured on an engineering test bench

Whilst e2v technologies has taken care to ensure the accuracy of the information contained herein it accepts no responsibility for the consequences of any use thereof and also reserves the right to change the specification of goods without notice. e2v technologies accepts no liability beyond the set out in its standard conditions of sale in respect of infringement of third party patents arising from the use of tubes or other devices in accordance with information contained herein.

e2v technologies (uk) limited, Waterhouse Lane, Chelmsford, Essex CM1 2QU United Kingdom Telephone: +44 (0)1245 493493 Facsimile: +44 (0)1245 492492

e-mail: enquiries@e2v.com Internet: www.e2v.com Holding Company: e2v technologies plc

e2v technologies inc. 520 White Plains Road, Suite 450, Tarrytown, NY10591 USA Telephone: (914) 592-6050 Facsimile: (914) 592-5148 e-mail: enquiries@e2vtechnologies.us

© e2v technologies (uk) limited 2009

A1A-MiCS-5525 Version 2, July 2009

Template: DF764388A-2

106694

MEASUREMENT CIRCUIT EXAMPLE

As shown below, the sensitive resistance is measured using a load resistor.




Figure 3: MiCS-5525 with measurement circuit (top view)

The voltage measured on the load resistor is a direct measure of the resistance of the sensor. R_L must be equal or greater than 820Ω in order not to damage the sensing layer.

ELECTRICAL CHARACTERISTICS

Rating	Symbol	Value/Range	Unit
Maximum heater power dissipation	P_H	88	mW
Maximum sensitive layer power dissipation	P_S	8	mW
Voltage supply	V_{supply}	4.9 - 5.1	V
Relative humidity range	R_H	5 - 95	%RH
Ambient operating temperature	T_{amb}	-30 - 85	°C
Storage temperature range	T_{sto}	-40 - 120	°C
Storage humidity range	RH_{sto}	5 - 95	%RH

OPERATING CONDITIONS

Parameter	Symbol	Typ	Min	Max	Unit
Heating power	P_H	76	71	81	mW
Heating voltage	V_H	2.4	-	-	V
Heating current	I_H	32	-	-	mA
Heating resistance at nominal power	R_H	74	66	82	Ω

SENSITIVITY CHARACTERISTICS

Characteristic	Symbol	Typ	Min	Max	Unit
CO detection range	FS		1	1000	ppm
Sensing resistance in air (see note 1)	R_0	-	100	1500	$k\Omega$
Sensitivity CO 60 ppm (see note 2)	S_{60}	-	5	50	-

Notes:


1. Sensing resistance in air, R_0 , is measured under controlled ambient conditions, i.e. synthetic air at 23 ± 5 °C and $50 \pm 10\%$. Sampling test.
2. Sensitivity CO 60 ppm is defined as R_S in air divided by R_0 at 60 ppm CO. Test conditions are 23 ± 5 °C and $50 \pm 10\%$ RH. Indicative values only, sampling test.

IMPORTANT PRECAUTIONS

Read the following instructions carefully before using the MiCS-5525 described in this document to avoid erroneous readings and to prevent the device from permanent damage.

- The sensor must be reflow soldered in a neutral atmosphere, without soldering flux vapours.
- The sensor must not be exposed to high concentrations of organic solvents, ammonia, silicone vapour or cigarette-smoke in order to avoid poisoning the sensitive layer.
- Heater voltages above the specified maximum rating will destroy the sensor due to overheating.
- This sensor is to be placed in a filtered package that protects it against water and dust projections.
- e2v strongly recommends using ESD protection equipment to handle the sensor.
- For any additional questions, contact e2v.

PACKAGE AND FILTER OUTLINE

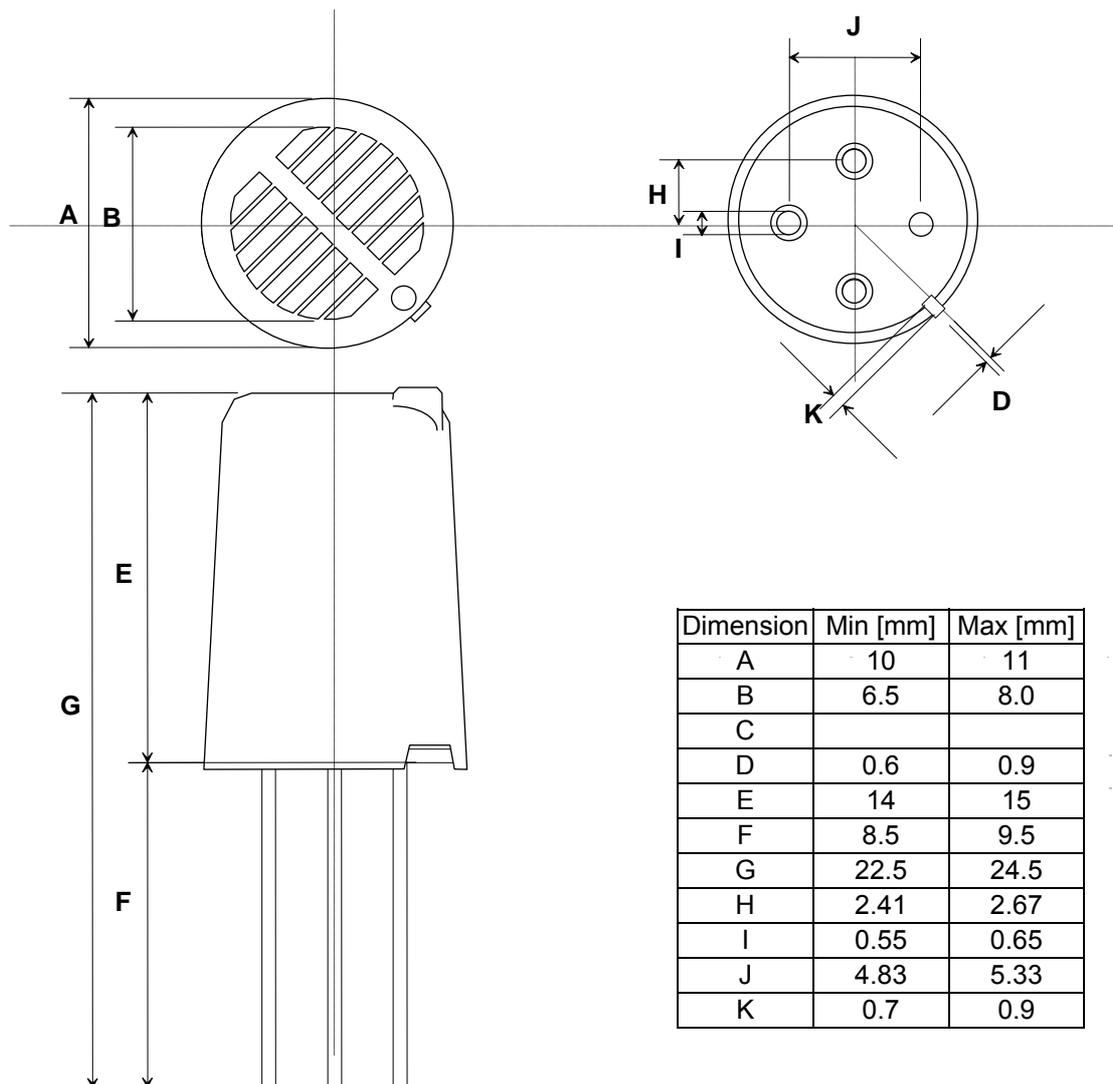

e2v semiconductor gas sensors are well suited for leak detection and applications requiring limited accuracy. Their use for absolute gas concentration detection is more complicated because they typically require temperature compensation, calibration, and sometimes as well, humidity compensation. Their base resistance in clean air and their sensitivity can vary over time depending on their environment. This effect must be taken into account for any application development (1102-1.0).