

V5 Miniature switches



The V5 series of switches is a range of miniature switches designed to meet world wide specifications. The V5 series offers a very high electrical capacity, up to 22 Amps, 250 Vac, and the capability to withstand high in-rush currents. It has a long mechanical and electrical life, and the miniature thermoplastic housing can meet requirements to KC 250 or 150 °C. Resistance to arcing/tracking and temperature/humidity tolerances are very high. The complete range offers a large variety of contact types, actuators, terminations, operating characteristics and electrical ratings.


High current capacity precision switches for long life and high reliability

The Honeywell V5 series is designed to meet the stringent requirements of today's designs for high currents, long operating life, precision and reliability. The internal mechanism is the key.


The two piece spring and carrier design provides a parallel path for higher current carrying capacity and better conduction of heat away from the contacts.

Because the "C" spring and the carrier move independently without flexing or hinging as in other designs, a much greater electrical and mechanical lifetime is achieved.


In addition, the V5 overcomes the problem of contact welding in applications using inductive, capacitive, lamp loads or high in-rush currents. With the V5, the large contact wiping action ensures that slight welds are broken off by the shearing movement when switching. This friction contact system also helps clean contacts during operation in applications where dust or other contaminants may be present. It helps reduce contact resistance and ensures maximum contact reliability whether switching milliamps or high currents.




High current rating with low operating force (100 g [1 N], 22 A)




Wide range of operating levers: 2 mounting positions Only one operating point



Contact wiping action - shearing action of contacts during switching ensures reliability





High grade, flame retardant thermoplastics




Safe operating - high overtravel


C spring
Carrier

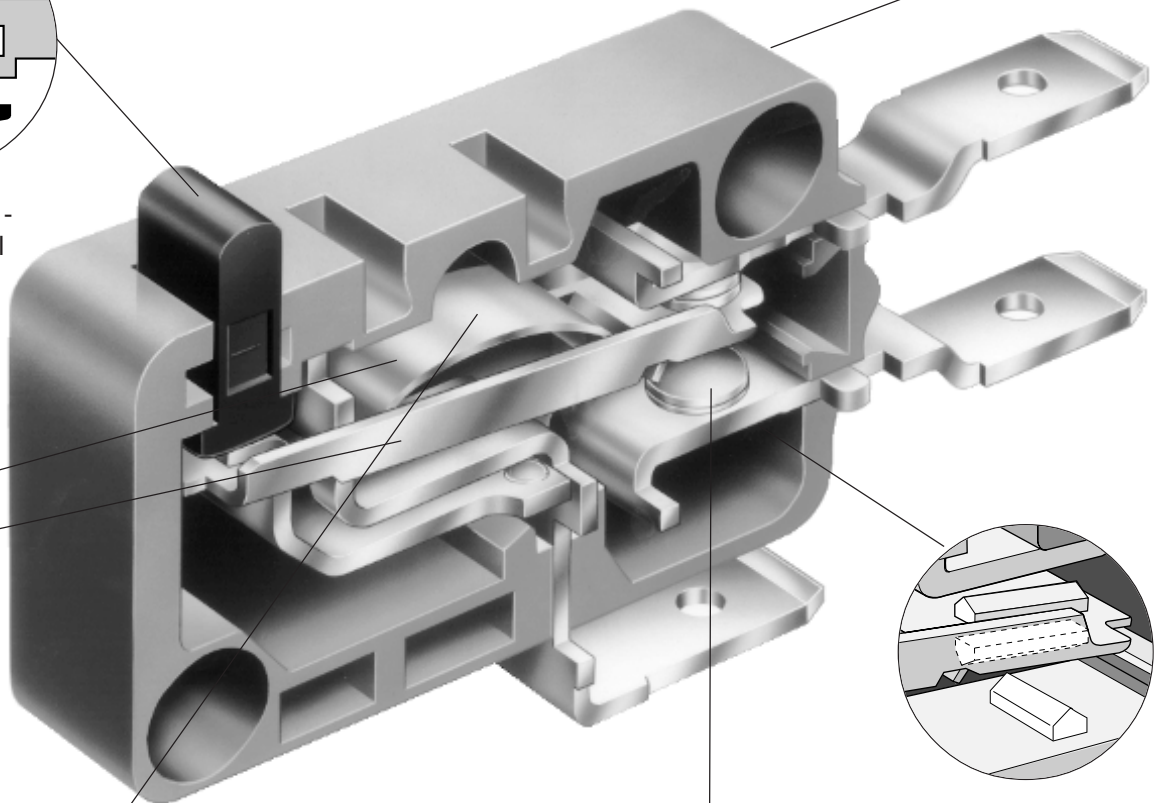


Gold cross point contacts available for excellent performance in low energy circuits



Two-piece spring and carrier mechanism gives extra long electrical and mechanical life.



Wide range of operating temperature versions 85 °C, 125 °C, 150 °C



High contact reliability - optimum reliability due to high contact force

Customised solutions to fit your exact needs

Usually, Honeywell can offer an "off the shelf" product to meet your requirements. But we also specialise in the supply of customised versions to your own specification. Contact us for more information.

Technical data

Materials

Case / Cover:

Thermoplastic

85 °C Glass filled polyester

125 °C Glass filled nylon

150 °C Glass filled polyetherimide

All materials flame retardant:

UL94VO rated

Actuator:

Teflon filled phenolic for smooth operation

Terminals: NO and NC Terminals

Brass (CuZn); Ag plated on solder types and 16 amp and 20 amp versions

Common terminal:

Brass (CuZn), Ag plated

Contact materials:

Gold alloy cross point 90 Au 10 Ag

Fine Silver Ag

Silver cadmium oxide AgCdO

Auxiliary actuator:

Plain - stainless steel

Roller - stainless steel with

phosphor bronze roller

Operating temperature:

85 °C, 125 °C, 150 °C

Minimum operating temperature:

-55 °C

Approvals:

Worldwide standards approvals -

BEAB, VDE, SEMKO, UL, CSA and others

Tracking resistance:

85 °C version rated to >KC 175

125 °C version rated to >KC 250

Contact gap:

<3 mm (u)

Mechanical life (full overtravel):

30,000,000

Electrical life (at full rated load):

100,000 operations (min)

The Honeywell V5 selection guide

A catalogue listing number is built up using the table below. First, choose the appropriate code for the electrical rating and operating characteristics required from the first column of the table eg. V5 A is for 20(4) Amp switch with 1.6 mm pretravel, 300 g operating force and 75 g release force. Then select the remaining code letters from the other columns as desired, subject to their availability for the rating and characteristics chosen, as indicated by the "•" symbol.

Example:

V 5 A 0 1 0 C B 1 D

This is a 20(4) A switch with 85 °C max.

temperature rating, SPDT contact arrangement, silver cadmium oxide contacts, 6.3x0.8 mm silver plated straight terminals, and short roller lever mounted in the slot furthest from plunger. It would be marked with full European approvals.

Note:

When ordering a V5 switch without lever, do not specify a 10th character. Only specify the 9th character if a UL/CSA approved switch without lever is required.


P.T. max mm	1.6	1.6	3.2	1.6	3.2	6.4	3.2	1.6	9
D.T. max mm	0.25	0.25	0.75	0.25	0.75	1.5	0.75	0.25	1.9
O.T. min mm	0.8	0.8	1.2	0.8	1.2	2.4	1.2	0.8	3.3
O.P. min	14.7±0.3	15.3±0.3	15.3±0.9	20.6±0.5	20.6±1.0	15.3±1.8	18.5±0.9	20.6±0.5	15.3±2.4

* ratios apply when the lever is fitted in slot position 1
characteristics are measured at the end of the lever

PT = Pretravel (mm max.) OT = Overtravel (mm min.) OF = Operating force (g max.)
DT = Differential travel (mm max.) OP = Operating point (+0.5 mm) RF = Release Force (g min.)



V5 technical information

Switch case dimensions (mm)


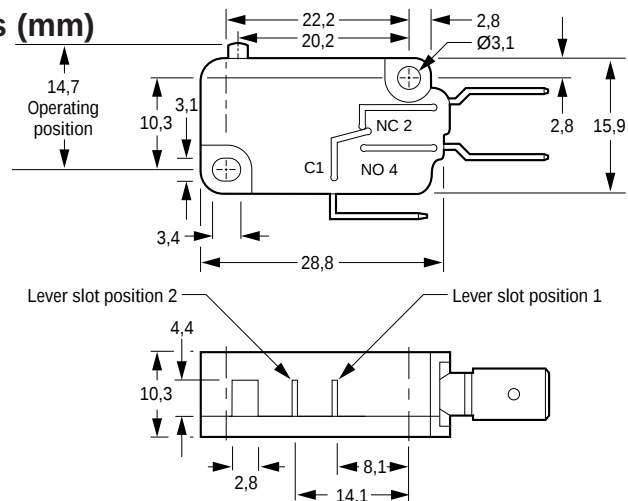


Terminal dimensions (mm)



7th digit of part number

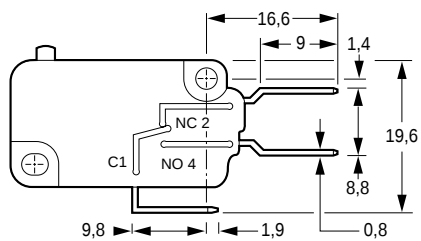



B, C
(6,3 x 0,8)

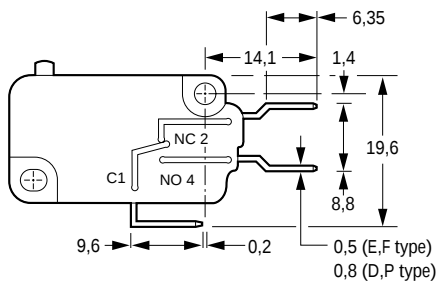

E, F
(4,8 x 0,5)
D, P
(4,8 x 0,8)

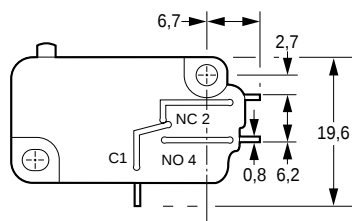

S
(short solder)

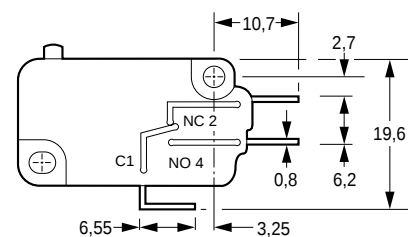

T
(standard solder)

SUNSTAR 商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: SUNS8888@hotmail.com

邮编：518033 E-mail:szss20@163.com QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382