

# Giant Magneto Resistive Position Sensor

GMR C6

Version 1.0

Preliminary

This angle sensor is based on the **Giant Magneto Resistive (GMR) technology**. It is outstanding for the huge tolerances it offers to the user in assembly.


## Features

- GMR sensor in SMD package
- **Sensitive to the direction**, not to the intensity of the magnetic field
- Providing both sine and cosine signals from 1 chip
- Constant  $T_C$  of  $R$  and  $\Delta R$


## Applications

- Rotation and linear sensing with large air gaps
- Angle encoders
- Contactless potentiometers
- Incremental encoders

## Pin Configuration\*

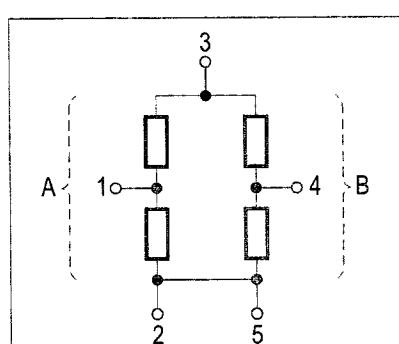

3, 5 (= 2)	supply
1, 4	GMR bridge access
6	not connected

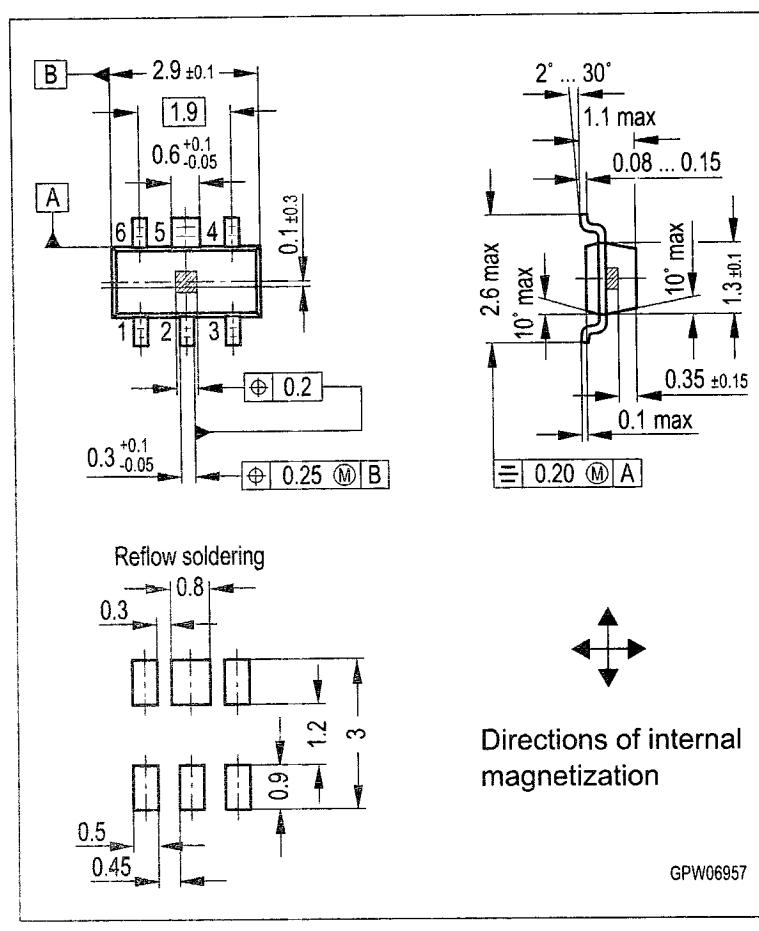


\* Beware: This is the correct pin configuration. The pin configuration of GMR application note (10.98) is not actual anymore.

Type	Marking	Ordering Code
GMR C6 <sup>1)</sup>	C	Q62705-K5005

<sup>1)</sup> GMR technology is qualified, GMR C6 is in qualification.

The GMR C6 is an angle sensor based on sputtered metallic multilayer technology. 4 resistors are monolithically integrated on 1 chip. Providing two halfbridges, if 2 external resistors are added. The outstanding feature of this magnetic sensor is the fact, that it is sensitive to the orientation of the magnetic field and not to its intensity as long as the field is in a range between 5 ... 15 kA/m. This means, the signal output of this sensor is independent of the sensor position relative to the magnet in lateral, axial or rotational direction in the range of several millimetres. Optimum results are achieved by using magnetic targets like permanent magnets or magnetic pole-wheels. There is no need for a biasing magnet! Due to the linear change of both, basic and field dependent part of the resistance vs. temperature, simple and efficient electronic compensation of  $T_C$  ( $R$ ,  $\Delta R$ ) is possible.

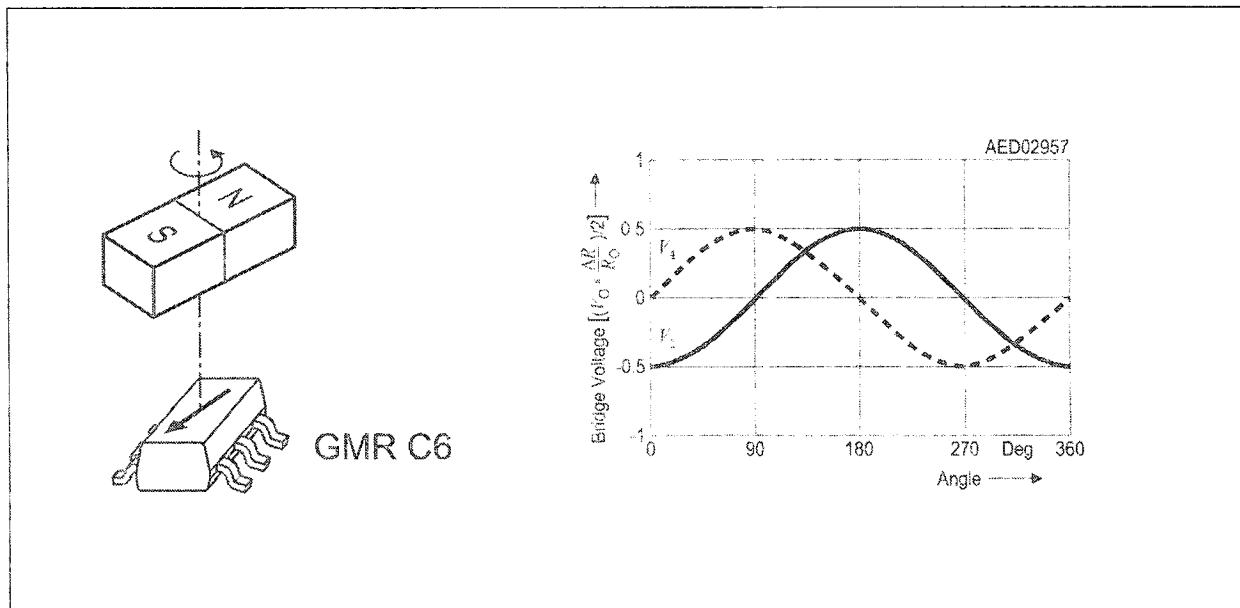

**Figure 1 Output Voltage of Half Bridges ( $V_1$ ,  $V_4$ ) as a Function of the Magnetic Field Orientation**

## Maximum Ratings

Parameter	Symbol	Value	Unit
Operating temperature	$T_A$	- 40 ... + 150	°C
Storage temperature	$T_{stg}$	- 50 ... + 150	°C
Supply voltage	$V_1$	7	V
Thermal conductivity	$G_{thC} A$	> 4	mW/K
Magnetic field <sup>1)</sup>	$H_{rot}$	< 15	kA/m

<sup>1)</sup> larger fields may reduce the magnetoresistive effect irreversibly

## Characteristics ( $T_A = 25$ °C)

Parameter	Symbol	Value	Unit
Nominal supply voltage	$V_{1N}$	5	V
Basic resistance	$R_0$	> 700	Ω
Magnetoresistive effect $H_{rot} = 5 \dots 15$ kA/m	$\Delta R/R_0$	> 4	%
Output signal halfbridge @ $V_{1N} = 5$ V	$V_{OUT}$	> 100	mV
Offset voltage per halfbridge @ $V_{1N} = 5$ V	$ V_0 $	< 8	mV
Temperature coefficient of basic resistance	$TC_{R0}$	+ 0.09 ... + 0.12	%/K
Temperature coefficient of magnetoresistance	$TC_{\Delta R}$	- 0.12 ... - 0.09	%/K
Temperature coefficient of magnetoresistive effect	$TC_{\Delta R/R0}$	- 0.27 ... - 0.23	%/K

## Application Hints

The application mode of the GMR position sensor is preferably as a bridge or halfbridge circuit. This circuit compensates for the  $T_C$  of the resistance value  $R_0$ . To compensate for the  $T_C$  of the GMR effect  $\Delta R/R_0$ , if there is the necessity, is left to the application circuit and can be done for example with a NIC circuit. When operated over a complete 360° turn, two total signals of > 20 mV/V are achieved at 25 °C with two halfbridges. In the case of linear position sensing, the electrical circuit remains unchanged, also providing two phaseshifted signals (i.e.sine and cosine).

欢迎索取免费详细资料、设计选型指南和光盘、样品；产品繁多未能尽录，欢迎来电查询。

中国传感器科技信息网：HTTP : //WWW.SENSOR-IC.COM/

工控安防网：HTTP : //WWW.PC-PS.NET/

消费电子专用电路网：HTTP://WWW.SUNSTARE.COM/

E-MAIL : [xjr5@163.com](mailto:xjr5@163.com) [szss20@163.com](mailto:szss20@163.com)

MSN: [suns8888@hotmail.com](mailto:suns8888@hotmail.com)

QQ: 195847376

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83376549 83376489 83387030 83387016

传真：0755-83376182 83338339 邮编：518033 手机：(0)13902971329

深圳展销部：深圳华强北路赛格电子市场 2583 号 TEL/FAX :  
0755-83665529 25059422

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL : 010-81159046 82615020 13501189838 FAX : 010-82613476

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL : 021-28311762 56703037 13701955389 FAX : 021-56703037

西安分公司：西安高新区 20 所(中国电子科技集团导航技术研究所)  
西安劳动南路 88 号电子商城二楼 D23 号

TEL : 029-81022619 13072977981 FAX:029-88789382

成都：TEL:(0)13717066236

技术支持：0755-83394033 13501568376