



WSL431

Adjustable Precision Shunt Regulator

Features

- Precise Reference Voltage to 2.505V
- Guaranteed 0.5%, 1% and 2% Reference Voltage Tolerance
- Sink Current Capability, 1mA to 100mA
- Quick Turn-on
- Adjustable Output Voltage, $V_o = V_{ref}$ to 20V
- Low Operational Cathode Current, 150 μ A Typical
- 0.1 Ω Typical Output Impedance
- SOT-89, TO-92 and SOT-23 Packages

This device has a typical output impedance of 0.1 Ω . Active output circuitry provides a very sharp turn-on characteristic, making the WSL431 excellent replacements for zener diodes in many applications, including on-board Regulation and adjustable power supplies.


Applications

- Linear Regulators
- Adjustable Power Supply
- Switching Power Supply

General Description


The WSL431 is a 3 terminal adjustable voltage reference with specified thermal stability over applicable commercial temperature ranges. Output voltage may be set to any value between V_{ref} (2.505V) and 20V with two external resistors (see Figure 2).

When used with a photocoupler, the WSL431 is an ideal voltage reference in isolated feedback circuits for 2.505V to 12V switching-mode power supplies.




REF ANODE CATHODE

SOT-89 (Top View)



**1: REF
2: ANODE
3: CATHODE**

TO-92



SOT-23 (Top View)

Winson reserves the right to make changes to improve reliability or manufacturability.


©Winson, Jan. 2000 (Rev. C)




Ordering Information

<p>WSL431-XP □ N □</p> <p>Elec. Grade</p> <p>Package Code</p> <p>N: No-Lead Product</p>	<p>Elec. Grad 2: 0.5% Reference Voltage Tolerance 3: 1% Reference Voltage Tolerance 4: 2% Reference Voltage Tolerance</p> <p>Package Code A: TO-92 C: SOT-23 N: SOT-89</p>
--	--

Symbol

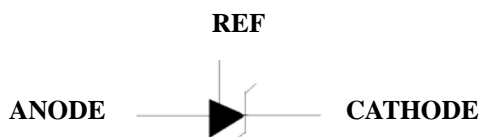

Functional Diagram

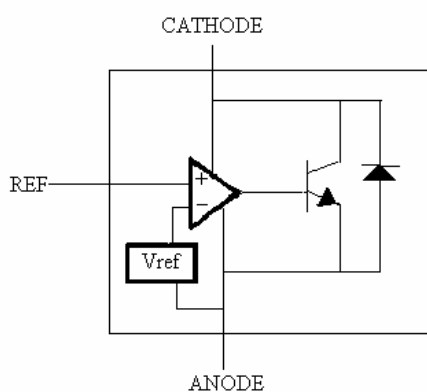

Winson reserves the right to make changes to improve reliability or manufacturability.

©Winson, Jan. 2000 (Rev. C)



WSL431

Absolute Maximum Ratings

Symbol	Parameter	Rating	Unit
V_{KA}	Cathode voltage	26	V
I_K	Continuous cathode current range	150	mA
I_{ref}	Reference current range	3	mA
T_A	Ambient temperature range	0 to 85	°C
T_J	Junction temperature range	0 to 125	°C
T_{STG}	Storage Temperature Range	-65 to 150	°C
T_{SO}	Lead temperature range, T_s (Soldering, 10sec)	260	°C

Electrical Characteristics $T_A = 25^\circ\text{C}$ (unless otherwise noted)

Symbol	Parameter	Test Conditions	WSL431			Unit
			Min.	Typ.	Max.	
V_{ref}	$V_{KA}=V_{ref}, I_K=10\text{mA}$.		WSL431B	2.4925	2.505	2.5175
			WSL431C	2.480	2.505	2.530
			WSL431D	2.455	2.505	2.555
$\Delta V_{ref}/T$	Reference Voltage Drift over Temp. range	$T_A=0$ to 85°C^{*1} , $I_K=10\text{mA}$.		4	20	mV
$\Delta V_{ref}/\Delta V_{KA}$	Voltage Ration (open loop gain)	$I_K=10\text{mA}$, $V_{KA}=V_{ref}$ to 20V^{*2}	-4	-1.6		mV/V
I_{ref}	Reference Current	$I_K=10\text{mA}$, $R_1=10\text{K}\Omega$, $R_2=\text{open}^{*2}$		0.4	3.5	μA
$\Delta I_{ref}/T$	Reference Current Drift	$I_K=10\text{mA}$, $R_1=10\text{K}\Omega$, $R_2=\text{open}$, $T_A=0$ to 85°C^{*2}		0.4	1.2	μA
$I_{K(\min)}$	Min. Cathode Current	$V_{KA}=V_{ref}^{*1}$		0.15	0.4	mA
$I_{K(\text{off})}$	Off-state Cathode Current	$V_{KA}=20\text{V}$, $V_{ref}=0\text{V}^{*3}$		0.1	1	μA
Z_{KA}	Dynamic Impedance	$V_{KA}=V_{ref}$, $I_K=1\text{mA}$ to 100mA , $f=1\text{kHz}^{*1}$	-0.4	-0.1		Ω

- Notes: *1: use Figure 1
*2: use Figure 2
*3: use Figure 3

Winson reserves the right to make changes to improve reliability or manufacturability.

©Winson, Jan. 2000 (Rev. C)



Test figures

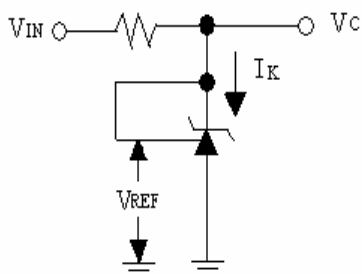


Figure 1. Test Circuit for $V_{KA}=V_{REF}$
 $V_O=V_{KA}=V_{REF}$

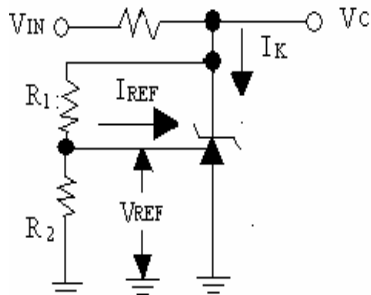


Figure 2. Test Circuit for $V_{KA}<V_{REF}$,
 $V_O=V_{KA}=V_{REF}\times(1+R_1/R_2)+I_{REF}\times R_1$




Figure 3. Test Circuit for $I_{k(off)}$

Winson reserves the right to make changes to improve reliability or manufacturability.


©Winson, Jan. 2000 (Rev. C)




WSL431

TYPICAL CHARACTERISTICS


Vref. vs Free-Air Temperature

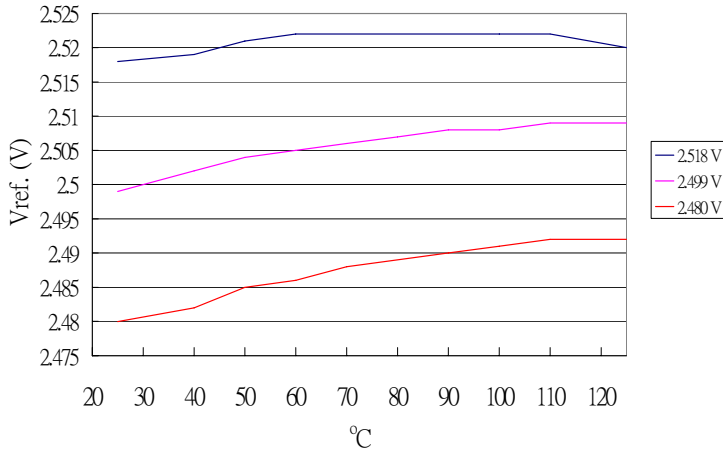


Iref vs Free-Air Temperature

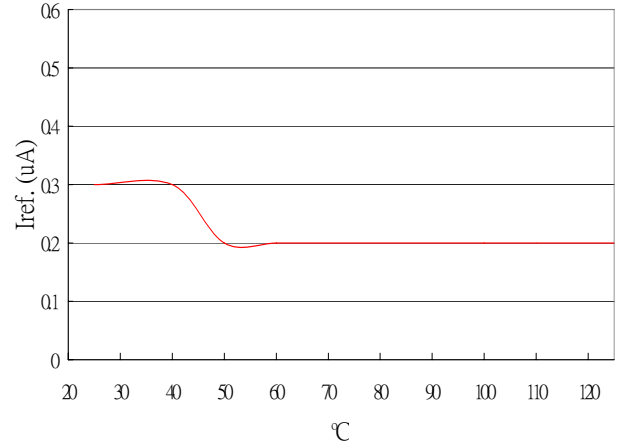


Ik(off) vs Free-Air Temperature

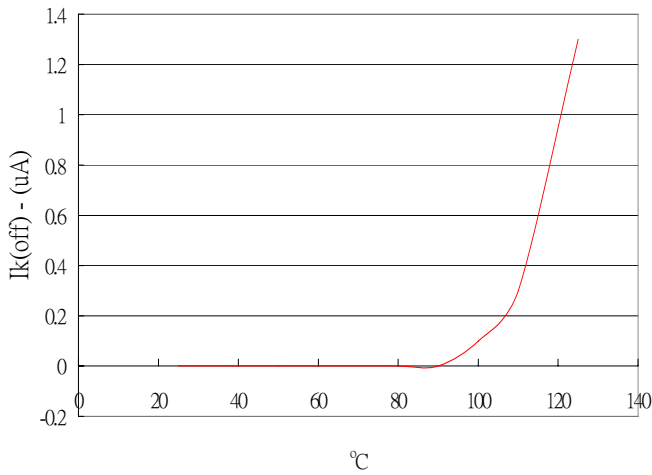

Ratio of Delta Vref to Delta Vk vs Temperature

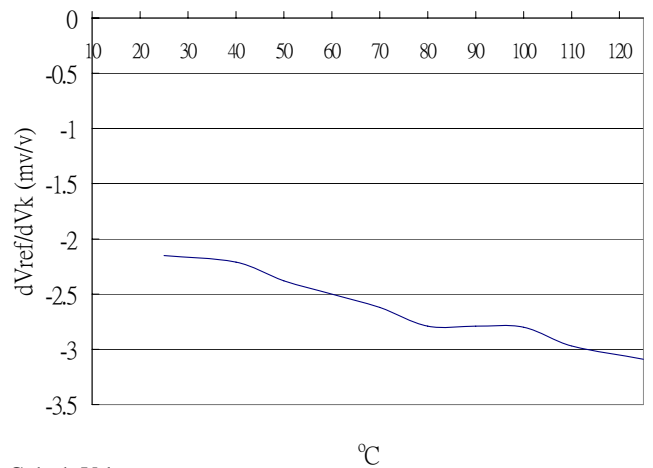

Cathode Current vs Cathode Voltage

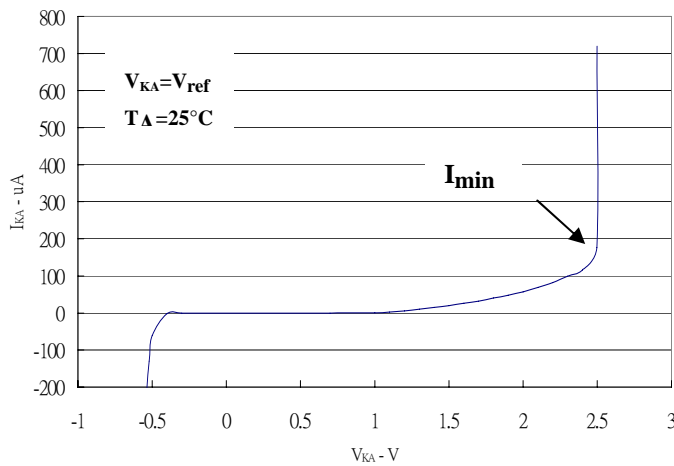

Winson reserves the right to make changes to improve reliability or manufacturability.


©Winson, Jan. 2000 (Rev. C)



WSL431

Application schematic

5-Volt Precision Regulator

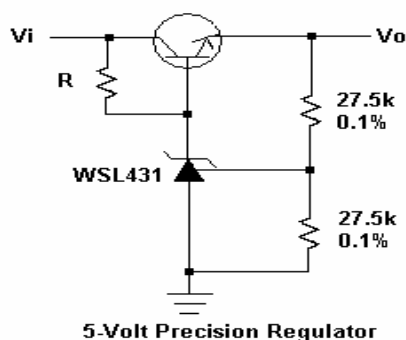

* R_b should provide cathode current large than 0.4mA to maintain WSL431 work properly.

Figure 4.

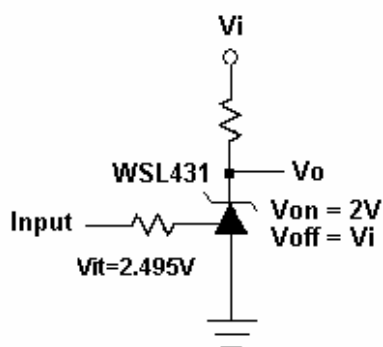


Figure 5.

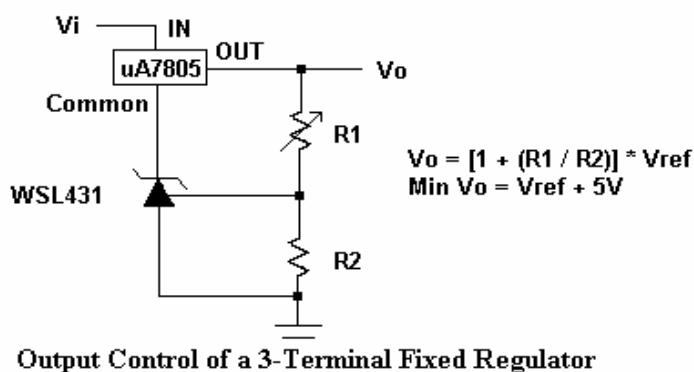


Figure 6.

Winson reserves the right to make changes to improve reliability or manufacturability.

©Winson, Jan. 2000 (Rev. C)

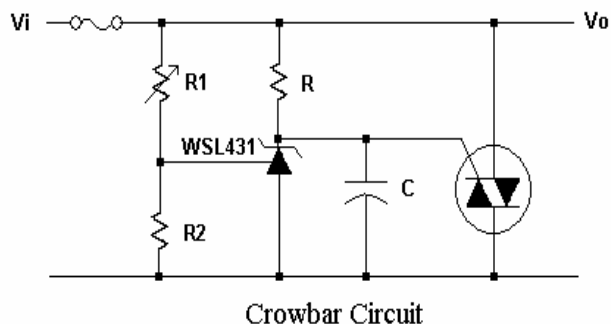


Figure 7.

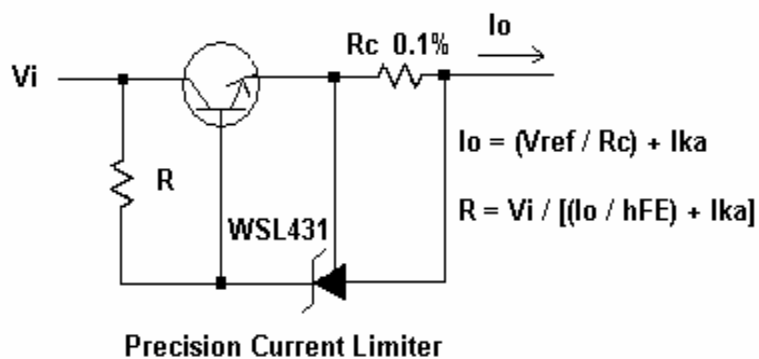


Figure 8.

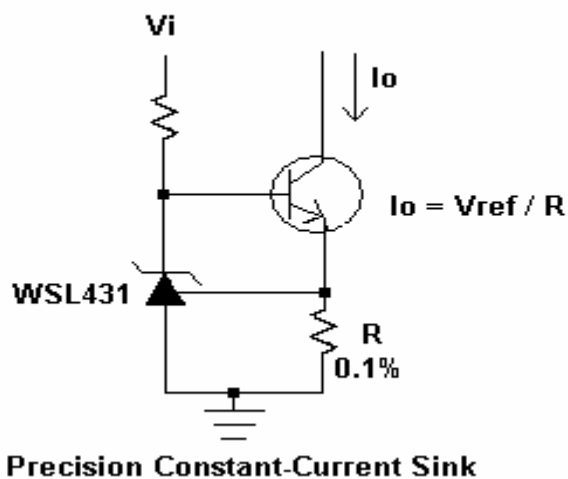


Figure 9.

Winson reserves the right to make changes to improve reliability or manufacturability.

©Winson, Jan. 2000 (Rev. C)