



低电压检测器

70XX 系列

Low Voltage Detector

70XX Series

70XX 系列是使用 CMOS 技术开发的低电压检测集成电路。具有高精度电压检测和超低功耗的特点。

The 70XX series is a family of Low Voltage Detector. developed using CMOS technology.

These ICS perform with high accuracy detector threshold and Ultra-low supply current consumption

产品特点 Features:

- | | | |
|------------|----------------|---|
| • 超低功耗电流 | 典型值 1.2uA | • Ultra-low supply current |
| • 宽工作电压范围 | 1.5V~15V | • wide range of operation voltage |
| • 高精度电压值检测 | ±3% | • high accuracy detector threshold |
| • 低温漂检测电压 | 典型值 ±50pp m/°C | • low temperature_drift coefficient of detector threshold |

产品选录: Selection table

型号(Part NO.)	检测电压 (Detector voltage)	回差宽度 (Hysteresis with)	误差(Tolerance)
HL7015	1.5 V	0.075 V	±3% 1%
HL7019	1.9 V	0.095 V	±3% 1%
HL7021	2.1 V	0.105 V	±3% 1%
HL7022	2.2 V	0.11 V	±3% 1%
HL7024	2.4V	0.12 V	±3% 1%
HL7027	2.7V	0.135V	±3% 1%
HL7028	2.8V	0.140V	±3% 1%
HL7030	3.0V	0.150V	±3% 1%
HL7033	3.3V	0.165V	±3% 1%
HL7039	3.9V	0.195V	±3% 1%
HL7042	4.2V	0.21 V	±3% 1%
HL7044	4.4V	0.22 V	±3% 1%
HL7050	5.0V	0.25V	±3% 1%
HL7070	7.0V	0.35V	±3% 1%

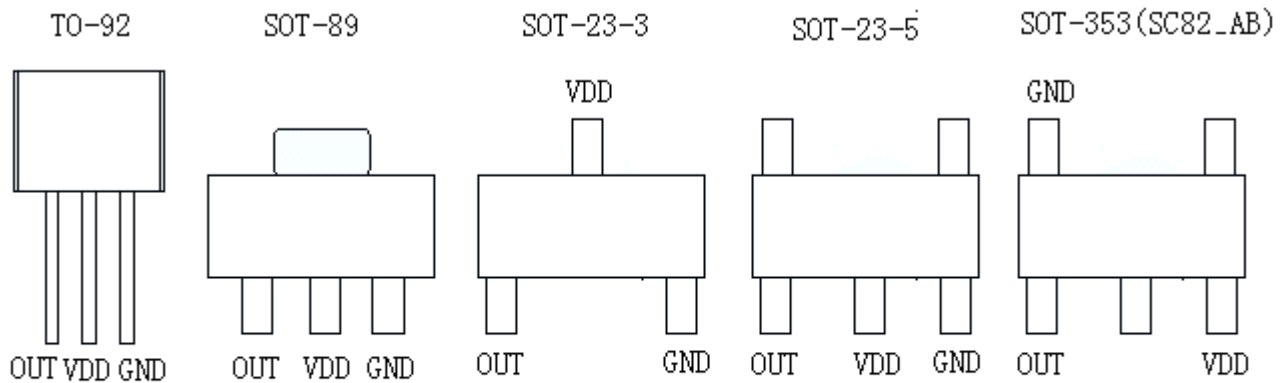
注: (一):可提供客户半定制产品, 选择范围 1.5~9V 每 0.1V 步进细分。

Note: for semi-custom parts selectable output voltage from 1.5~9V in 0.1v increment

(二): 可提供客户**检测电压误差** ±2% 产品选择。

Note: Custom can select Detector voltage tolerance ±2% product.

封装型式和管脚 (Package and pin assignment)

■ 绝对最大额定值 **Absolute Maximum Ratings:**(除特殊注明以外: $T_a=25^{\circ}\text{C}$) $T_a=25^{\circ}\text{C}$ unless otherwise specified)

项目 Item	记号 Symbol	绝对最大额定值 Absolute Maximum Ratings	单位
电源电压 Supply voltage	V_{DD}	18	V
输出电压 Output voltage	V_{OUT}	$GND-0.3 \sim V_{IN}+0.3$	
容许功耗 Power dissipatit	P_D	250	mW
工作周围温度范围 Operation temperature range	T_{opr}	$-40 \sim +85$	$^{\circ}\text{C}$
保存周围温度范围 Storage temperature range	T_{stg}	$-40 \sim +125$	

电气特性 **Electrical Characteristics:**

项目 ITEM	记号 SYMBOL	条件 CONDITIONS	型号 PART NO.	最小值 MIN	典型值 TYPE	最大值 MAX	单位 UNITS
检测电压 Detectable voltage	V _{DET}	R _L =4.7K	7015	1.455	1.5	1.545	V
			7019	1.843	1.9	1.957	
			7021	2.037	2.1	2.163	
			7022	2.134	2.2	2.266	
			7024	2.328	2.4	2.772	
			7027	2.619	2.7	2.781	
			7028	2.716	2.8	2.884	
			7030	2.910	3.0	3.090	
			7033	3.201	3.3	3.399	
			7039	3.783	3.9	4.017	
			7042	4.074	4.2	4.326	
			7044	4.268	4.4	4.532	
			7050	4.850	5.0	5.150	
			7070	6.790	7.0	7.210	
电压回差宽度 Hysteresis with	V _{HYS}	R _L =4.7K	7015	0.030	0.075	0.105	V
			7019	0.038	0.095	0.133	
			7021	0.042	0.105	0.147	
			7022	0.044	0.110	0.154	
			7024	0.048	0.120	0.168	
			7027	0.054	0.135	0.189	
			7028	0.056	0.140	0.196	
			7030	0.060	0.150	0.210	
			7033	0.066	0.165	0.231	
			7039	0.078	0.195	0.273	
			7042	0.084	0.210	0.294	
			7044	0.088	0.220	0.308	
			7050	0.100	0.250	0.350	
			7070	0.140	0.350	0.490	
电源电流 Supply current	I _{SS}	空载 no load	--		1.2	2	uA
工作电压 Operation voltage	V _{DD}		--	1.5		15	V
输出电流 Output current	I _{OUT}	V _{OUT} =0.3V	V _{DET} <3V	1	2	--	mA
			V _{DET} >3V	2	4	--	
检测电压温漂 Detector Voltage Threshold Temperation coefficient	$\Delta V_{DET}/\Delta^\circ C$	-40°C ≤ T _a ≤ 85°C	--	--	±50	±100	ppm/°C



电话:13798528768,0769-85338927,传真:85338927
邮箱:info@jfd-ic.com,QQ:402431824
网址:www.jfd-ic.com MSN:aleafuyzf@hotmail.com

基本应用电路

Application Circuits:

