

FREQUENCY MIXERS

Plug-In

LEVEL 17 50 kHz to 3 GHz



SBL/SIMA



SRA



TFM/TUF



TAK

+17 dBm LO, up to +10 dBm RF

MODEL NO.	FREQUENCY MHz		CONVERSION LOSS dB				LO-RF ISOLATION, dB						LO-IF ISOLATION, dB						CASE STYLE	CONNECTOR	PRICE \$	
	LO/RF f_l-f_u	IF	Mid-Band m			Total Range Max.	L		M		U		L		M		U					Note B
			\bar{x}	σ	Max.		Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.	Typ.	Min.				
SRA-1H	.5-500	DC-500	6.01	.08	7.5	8.5	55	45	45	30	35	25	45	35	40	30	30	20	A01	e	22.95	
SRA-1WH	1-750	DC-750	5.85	.11	7.5	8.5	50	40	45	25	35	25	45	35	40	30	30	20	A01	f	26.95	
SRA-2H	2-1000	DC-1000	6.34	.14	7.5	10.0	50	40	35	25	35	25	45	30	30	20	25	20	A01	f	40.95	
SRA-3H	.05-200	DC-200	5.18	.05	7.0	7.5	50	45	40	30	35	25	45	35	40	30	30	20	A01	e	24.95	
SRA-11H	10-3000	10-1000	6.83	.09	10.0	12.0	27	20	25	18	23	16	27	20	25	18	23	16	A01	m	48.95	
SRA-173H**	5-1200	DC-1200	5.38	.05	7.0	8.5	40	35	35	25	35	20	40	35	35	20	30	20	A01	u,f	33.95	
SIMA-5H	2-1500	DC-1000	6.94	.07	8.5	8.5	65	35	44	23	40	22	54	25	30	23	25	13	A06	m	34.95	
☐ TUF-18DH	100-1800	50-750	7.3	.15	8.5	9.0	41 (Typ.)		23 (Min.)				33 (Typ.)		20 (Min.)				B02	z	23.95	

+17 dBm LO, up to +14 dBm RF

TFM-1H	2-500	DC-500	6.14	.11	7.5	8.5	50	45	40	30	30	20	45	40	35	25	25	20	B02	z	27.95
TFM-2H	5-1000	DC-1000	6.12	.12	7.0	10.0	50	45	40	30	30	20	45	40	35	25	25	17	B02	z	38.95
TFM-3H	.1-250	DC-250	4.58	.11	7.0	8.5	50	45	40	30	28	23	45	40	35	25	26	20	B02	z	27.95
☐ TUF-1H	2-600	DC-600	5.90	.18	7.0	8.0	68	50	50	30	43	25	62	45	48	30	33	22	B02	z	10.20
☐ TUF-5H	20-1500	DC-1000	7.50	.17	8.5	9.0	62	55	50	40	38	25	40	25	29	18	20	8	B02	z	15.45
☐ TUF-11AH	1400-1900	40-500	7.30	.28	9.0	9.0	35 (Typ.)		25 (Min.)				30 (Typ.)		15 (Min.)				B02	z	23.95
TAK-1H	2-500	DC-500	5.93	.08	7.5	8.5	50	40	40	30	30	25	45	35	35	25	25	20	A05	e	23.45
TAK-1WH	5-750	DC-750	5.71	.08	7.5	9.0	50	40	40	30	30	25	45	35	35	25	30	20	A05	f	27.95
TAK-3H	.05-300	DC-300	4.82	.09	7.0	8.5	55	45	40	30	30	25	50	40	35	25	25	20	A05	e	25.45


L = low range [f_l to $10f_l$]

M = mid range [$10f_l$ to $f_u/2$]
m = mid band [$2f_l$ to $f_u/2$]

U = upper range [$f_u/2$ to f_u]


NOTES:

- Average of conversion loss at center of mid-band frequency ($f_l+f_u/4$)
- σ Standard deviation
- ☐ Non-hermetic
- ** Below 1 MHz IF, conversion loss increases up to 6 dB higher as frequency decreases to DC.
- ▼ When ordering, specify BNC or SMA connectors.
- † Phase detection, positive polarity.
- A. General Quality Control Procedures, Environmental Specifications, Hi-Rel, and MIL description are given in General Information (Section 0).
- B. Connector types and case mounted options, case finishes are given in section 0, see "Case Styles & Outline Drawings".
- C. Prices and Specifications subject to change without notice.
- 1. Absolute maximum power, voltage and current ratings:
 - 1a. RF power 200mW 1b. Peak IF current, 40mA
- 2. Two-Tone 3rd order IM below IF, each tone at 0dBm (200 and 202 MHz), LO at +17dBm (180 MHz). All models 60dB typ., 55dB min., except 55 dB typ., 45 dB min. for TFM-3H, TAK-3H, ZFM-3H, ZLW-3SH, ZAD-3SH.

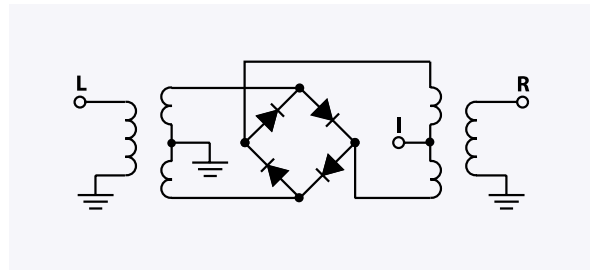

Coaxial

LEVEL 17 50 kHz to 8 GHz

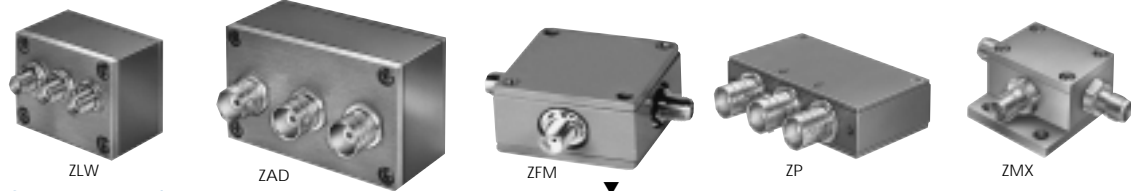

+17 dBm LO, up to +10 dBm RF

MODEL NO.	FREQUENCY MHz		CONVERSION LOSS dB				LO-RF ISOLATION, dB			LO-IF ISOLATION, dB			CASE STYLE	CONNECTION	PRICE \$						
	LO/RF f_L-f_U	IF	Mid-Band \bar{x}	σ	Max.	Total Range Max.	L Typ.	M Typ.	U Typ.	L Typ.	M Typ.	U Typ.				Note B	Qty. (1-9)				
ZLW-1H	.5-500	DC-500	6.13	.08	7.5	8.5	55	45	45	30	35	25	45	35	40	30	30	20	M21	ae	56.95
ZLW-2H	2-1000	DC-1000	6.34	.14	7.5	10.0	50	40	35	25	35	25	45	35	30	20	25	20	M21	ae	64.95
ZLW-11H	10-3000	10-1000	6.83	.09	10.0	12.0	27	20	25	18	23	16	27	20	25	18	23	16	M21	ae	99.95
ZAD-1H	.5-500	DC-500	6.16	.08	7.5	8.5	50	45	45	30	35	25	45	35	40	30	30	20	M22	ae	48.95
ZAD-3H	.05-200	DC-200	4.89	.09	7.0	7.5	55	45	45	30	35	25	45	35	40	30	30	20	M22	ae	50.95
ZAD-11H	10-3000	10-1000	6.83	.09	10.0	12.0	27	20	25	18	23	16	27	20	25	18	23	16	M22	ae	89.95

+17 dBm LO, up to +14 dBm RF

ZFM-1H	2-500	DC-500	6.14	.11	7.5	8.5	50	45	40	30	30	25	45	35	35	25	25	20	K18	ad	64.95
ZFM-2H	5-1000	DC-1000	6.12	.12	7.0	10.0	50	40	40	30	30	20	45	40	35	25	25	17	K18	ad	71.95
ZFM-3H	.05-300	DC-300	5.18	.11	7.0	8.5	55	45	40	30	30	25	50	40	35	25	25	20	K18	ad	64.95
ZFM-4H	5-1200	DC-1200	4.97	.11	8.0	9.0	50	40	35	25	30	20	50	40	35	20	30	20	K18	ad	73.95
ZP-1H	2-600	DC-600	5.90	.18	7.0	8.0	68	50	50	30	43	25	62	45	48	30	33	22	GG60	ag	45.95
ZP-2H	50-1000	DC-1000	6.20	.22	7.5	9.0	58	40	47	30	42	25	58	35	44	25	28	18	GG60	ag	45.95
ZP-3H	0.15-400	DC-400	5.00	.33	7.0	8.0	60	50	50	35	40	30	60	40	45	25	35	20	GG60	ag	45.95
ZP-5H	20-1500	DC-1000	7.50	.17	8.5	9.0	62	55	50	40	38	25	40	25	29	18	20	8	GG60	ag	49.95
ZP-11AH	1400-1900	40-500	7.30	.28	9.0	9.0	35 (Typ.)	25 (Min.)					30 (Typ.)	15 (Min.)					GG60	ag	49.95
ZMX-7GHR	3700-7000	DC-1000	5.3	.30	—	8.5	33 (Typ.)	20 (Min.)					34 (Typ.)	20 (Min.)					BU413	af	84.95
ZMX-8GH	3700-8000	DC-2000	5.8	.30	—	8.5	40 (Typ.)	20 (Min.)					18 (Typ.)	8 (Min.)					BU413	ad	89.95
ZLW-1WSH	5-750	DC-750	5.83	.07	7.5	9.0	50	45	40	30	30	20	45	40	35	25	30	20	M21	ae	66.95

L = low range [f_L to $10 f_L$]

M = mid range [$10 f_L$ to $f_U/2$]
m = mid band [$2f_L$ to $f_U/2$]

U = upper range [$f_U/2$ to f_U]

NSN GUIDE

MCL NO.	NSN	MIL-M-28837/1*
SRA-1H	6625-00-594-0223	08
SRA-1WH	5895-00-576-0716	
SRA-2H	5895-01-063-1078	
SRA-3H	5895-01-117-4537	
SRA-11H	5895-01-192-0173	
TAK-1H	5895-01-167-9721	
TAK-1WH	5895-01-282-0079	
TAK-3H	5895-01-274-2678	
TFM-1H	5895-01-129-0110	
TFM-2H	5895-01-235-1274	
TFM-3H	5895-01-374-0022	
ZAD-1WH	5895-01-045-4647	
ZAD-3H	5895-01-149-0771	
ZAD-11H	5985-01-288-9999	
ZFM-3H(BNC)	5895-01-290-0300	
ZLW-1H	5985-01-080-7637	
ZLW-1HB	5962-01-045-7500	
ZLW-1HB(SMA)	5895-01-141-4646	

pin and coaxial connections

see case style outline drawings

PORT	e	f	m	u	x	z	ad	ae	af	ag
LO	8	8	8	3,4 ^	2	4	1	1	2	L
RF	1	1	1	1	1	1	2	3	1	R
IF	3,4 ^	3,4 ^	3	8	3	2	3	2	3	X
GND EXT.	2,5,6,7	2,5,6,7	2,5,6,7	2,5,6,7	4,5,6	3	—	—	—	—
CASE GND	2	2,5,6,7	2,5,6,7	2,5,6,7	—	3	—	—	—	—
NOT USED	—	—	4	—	—	—	—	—	—	—

^ pins must be connected together externally

* units are not OPL listed