



# Automotive H-Bridge Driver

- Operating Supply Voltage 5V to 28V
- Overvoltage Protection against Transients up to 40V at Vbat
- $R_{DSon} = 150m\Omega$  for each Output Transistor at 25°C
- Continuous DC Load Current 5A (TC < 100°C)
- Output Current Limitation at typ 6,5A +/- 20%
- Short-Circuit Shutdown for Output Currents over 8A
- Logic Inputs TTL/CMOS Compatible
- Operating Frequency up to 20 kHz
- Overtemperature Protection
- Short-Circuit Protection
- Undervoltage Disable Function
- Diagnostic Output
- 2 Disable Inputs
- Coding Input for Alternative Functions
- HSOP20 Power Package
- Stable Operation with an External Capacitance of maximum 47µF at Vbat


## MC33186

**H-BRIDGE DRIVER**


**SEMICONDUCTOR  
TECHNICAL DATA**



**DH1 SUFFIX**  
PLASTIC PACKAGE  
CASE 751A-03  
HSOP-20

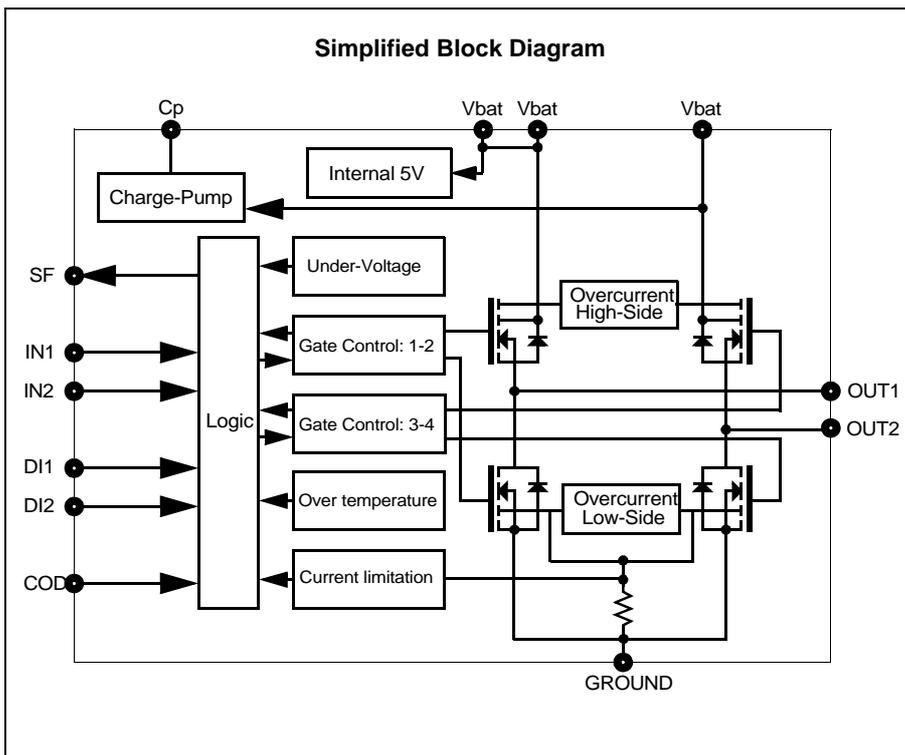

### PIN CONNECTIONS

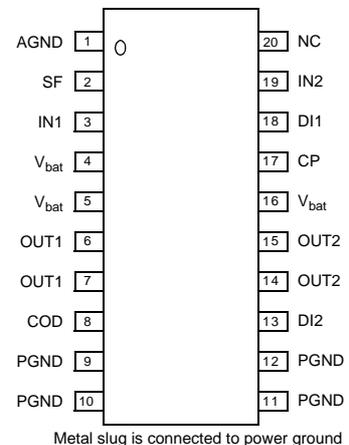

(Top View)

### ORDERING INFORMATION

Device	Temperature Range	Package
MC33186DH1R2	-40°C to +125°C	HSOP20

**MAXIMUM RATINGS**

Ratings	Symbol	Min	Typ	Max	Unit
---------	--------	-----	-----	-----	------

**ELECTRICAL RATINGS**

Supply Voltage - Static Destruction Proof - Dynamic Destruction Proof $t < 0,5s$	Vbat Vbat	- 1 - 2		28 40	V
Logic Inputs (IN1, IN2, DI1, DI2, CODE)	U	- 0.5		7	V
Output Status - Flag SF	U <sub>SF</sub>	- 0.5		7	V

**THERMAL RATINGS**

Junction Temperature	T <sub>j</sub>	- 40		+150	°C
Storage Temperature	T <sub>s</sub>	- 55		+125	°C
Ambient Temperature	T <sub>a</sub>	- 40		+125	°C
Thermal Resistance (with power applied on 2 power MOS)	Rth <sub>JC</sub>			+1,5	K/W

**ELECTRICAL CHARACTERISTICS.** T<sub>j</sub>: from -40°C to +150 °C, Vbat from 5 V to 28 V, unless otherwise note. Typical values reflect approximate mean at 25°C, nominal VCC, at time of device characterization.

Characteristics	Symbol	Min	Typ	Max	Unit
-----------------	--------	-----	-----	-----	------

**RANGE OF VALIDITY**

	Vbat T <sub>j</sub>	5 -40		28 150	V °C
--	------------------------	----------	--	-----------	---------

**POWER SUPPLY**

Operating Range : - Static - Dynamic ( t < 500ms )	Vbat Vbat	5		28 40	V V
Stanby current - f = 0 to 10KHz ; I <sub>OUT</sub> = 0A	I Vbat			35	mA
Vbat-undervoltage switch-off (without load) - Switch-off Voltage - Switch-on Voltage - Hysteresis		4.15 4.5 150	4.4 4.75	4.65 5	V V mV

**CHARGE-PUMP SUPPLY**

- Vbat = 4.15 V - Vbat < 40V	Vcp - Vbat Vcp - Vbat	3.35		20	V V
---------------------------------	--------------------------	------	--	----	--------

**LOGIC INPUTS**

Input High	VinH	3.4			V
Input Low	VinL			1.4	V
Input Hysteresis	U	0.7	1		V
Input Current (IN1, IN2, DI1) - U <sub>IN</sub> = 0V	I	- 200	- 80		μA
Input Current (DI2,COD) - U <sub>DI2</sub> = 5V	I <sub>DI2</sub>		25	100	μA

**ELECTRICAL CHARACTERISTICS.** T<sub>j</sub>: from -40°C to +150°C, V<sub>bat</sub> from 5 V to 28 V, unless otherwise note. Typical values reflect approximate mean at 25°C, nominal VCC, at time of device characterization.

Characteristics	Symbol	Min	Typ	Max	Unit
-----------------	--------	-----	-----	-----	------

**POWER OUTPUTS : OUT1, OUT2**

Switch on resistances : R <sub>OUT</sub> - V <sub>bat</sub> ; R <sub>OUT</sub> - GND  - V <sub>bat</sub> = 5 to 28V ; C <sub>cp</sub> = 0 to 33nF				300	mΩ
Current Limitation Controlled Peak Value					
Switch-off Current	(I <sub>OUT</sub> ) max	5.2	6.5	7.8	A
Switch-off Time	t <sub>a</sub>	15	20.5	26	μs
Blanking Time	t <sub>b</sub>	12	16.5	21	μs
High Side Overcurrent Detection Low Side Overcurrent Detection (4)	I <sub>OCHS</sub> I <sub>OCLS</sub>	11 8			A A
Leackage Current - Output Stage Switched off				100	μA
Free-Wheeling Diode Forward Voltage - I <sub>OU</sub> = 3A	U <sub>D</sub>			2	V
Free-Wheeling Diode Reverse Recovery Time	t <sub>rr</sub>	100			ns
- Switch-off Temperature - Hysteresis		160 20		190 30	°C °C

**OUTPUT STATUS FLAG** (Open drain output)

Output High (SF not set) U <sub>SF</sub> = 5V	I <sub>SF</sub>			10	μA
Output Low (SF set) ISF = 300 μA	V <sub>SF</sub>			1	V

**TIMING**

PWM frequency - C <sub>CP</sub> = 33nF	f			10	KHz
Maximum Switching Frequency During Current Limitation - V <sub>bat</sub> = 6....28V.....C <sub>CP</sub> = 33nF	f			20	KHz
Output ON Delay IN1 .....>OUT1 or IN2.....>OUT2	t <sub>don</sub>			15	μs
Output OFF Delay IN1 .....>OUT1 or IN2.....>OUT2	t <sub>doff</sub>			15	μs
Output Switching Time - C <sub>CP</sub> = 0 to 33nF OUTiH .....OUTiL, OUTiL .....OUTiH, I <sub>OUT</sub> = 3A	t <sub>r</sub> , t <sub>f</sub>	2		5	μs
Disable Delay Time DIi .....OUTi	t <sub>ddis</sub>			8	μs
Turn off in Case of Over-current or Over-temperature			4		μs
Power On Delay Time (C <sub>cp</sub> = 33nF)			1	5	ms

**TRUH TABLE**

Device State	Input Conditions				Status		Outputs	
	DI1 (3)	DI2 (3)	IN1	IN2	SF (5)	SF (6)	OU1	OU2
1-Forward	L	H	H	L	H	H	H	L
2-Reverse	L	H	L	H	H	H	L	H
3-Free Wheeling Low	L	H	L	L	H	H	L	L
4-Free Wheeling High	L	H	H	H	H	H	H	H
5-Disable 1	H	X	X	X	L	H	Z	Z
6-Disable 2	X	L	X	X	L	H	Z	Z
7-IN1 Disconnected	L	H	Z	X	H	H	H	X
8-IN2 Disconnected	L	H	X	Z	H	H	X	H
9-DI1 Disconnected	Z	X	X	X	L	H	Z	Z
10-DI2 Disconnected	X	Z	X	X	L	H	Z	Z
11-Current Limit.active	L	H	X	X	H	H	Z	Z
12-Undervoltage (1)	X	X	X	X	L	L	Z	Z
13-Over-temperature (2)	X	X	X	X	L	L	Z	Z
14-Over-current (2)	X	X	X	X	L	L	Z	Z

**NOTE :**

(1) In case of undervoltage, tristate and status-flag are reset automatically.

(2) Whenever over-current or over-temperature is detected, the fault is stored (i.e.status-flag remains low).

The tristate conditions and the status-flag are reset via DI1 (IN1) or DI2 (IN2).

Pinnames in brackets refer to coding pin (COD=Vcc).

(3) If COD = Vcc then DI1 and DI2 are not active.

(4) In case of over-current, the time when the current is greater than 7,8A is lower than 30 $\mu$ s, with a maximum frequency of 1kHz.

(5) COD=nc or GND

(6) COD = VCC

L = Low

H = High

X = High or Low

Z = High impedance (all output stage transistors are switched off).

## PINS FUNCTION DESCRIPTION

Pin	Name	Description
9, 10, 11, 12 Metal slug	GND	Power Ground
1	GND	Analog ground
2	Output Status-flag (SF)	Open drain output, active low. Is set according to the truth table .
3,13 18, 19	Inputs IN1,IN2 DI1,DI2, COD	Voltage controlled inputs with hysteresis
8	COD	When not connected or connected to GND, a stored failure will be reset by change of the voltage-level on DI1 or DI2. When connected to Vcc, the disable pin DI1 and DI2 are inactive. A stored failure will be reset by change of the voltage-level on IN1 or IN2 .
6, 7, 14, 15	OUT1 , OUT2	H-Bridge outputs with integrated free-wheeling diodes.
4, 5, 16	Vbat	<p>The pins 4 and 5 are internally connected. These pins supply the left high side and the analogue/logic part of the device. The pin 16 supplies the right high side and the charge pump. The pins 4, 5 and 16 should be connected together on the printed circuit board with connections as short as possible.</p> <p><i>Supervision and protection functions</i></p> <p><i>a) Supply voltage supervision</i> The supply voltage is supervised . If it is below its specific threshold , the power stages are switched in tristate and the status flag is switched low. If the supply voltage is over the specific threshold again , the power stage switches independently into normal operation, according to the input pins and the status flag is reset .</p> <p><i>b) Thermal supervision</i> In case of over-temperature the power stages are switched in tristate independent of the inputs signals and the status flag is switched low. If the level changes from high to low on DI1 (IN1) or low to high on DI2 ( IN2 ), the output stage switches on again if the temperature is below the specified limit .The status-flag is reset to high level (Pinnames in brackets refer to coding pin=Vcc).</p> <p><i>c) Supervision of overcurrent</i> If overcurrent is detected the power stages are independent of the inputs signals switched in tristate and the status flag is set . If the level changes from high to low on DI1 ( IN1 ) or low to high on DI2 ( IN2 ) the output stage switches on again and the status flag is reset to high level (Pinnames in brackets refer to coding pin = Vcc). The output stage switches into the mode defined by the inputs pins provided the temperature is below the specified limits .</p> <p><i>d) Current limiting</i> The maximum current which can flow under normal operating conditions is limited to <math>I_{max} = 6,5A \pm 20\%</math> .When the maximum current value is reached, the output stages are switched tristate for a fixed time. According to the time constant the current decreases until the next switch on occurs. See page 8 for schematics.</p>

Figure 1. Typical Application

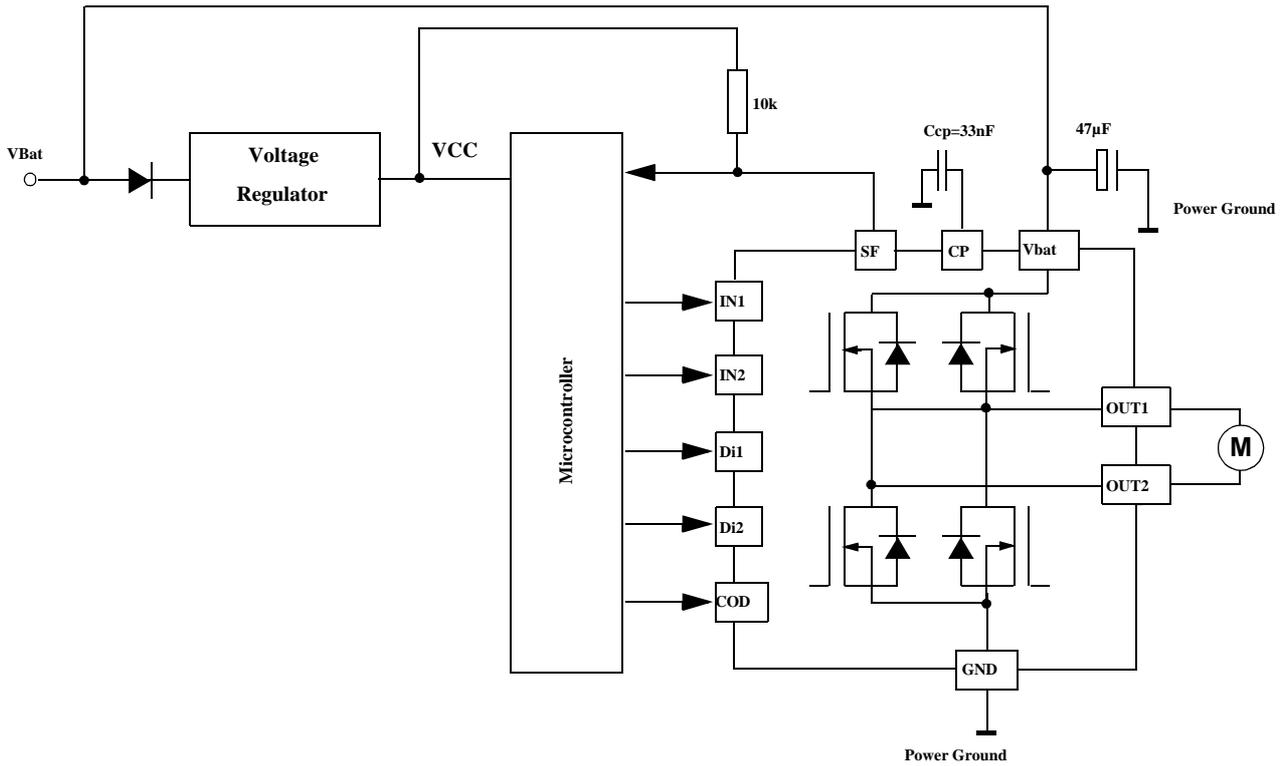


Figure 2. Output delay time



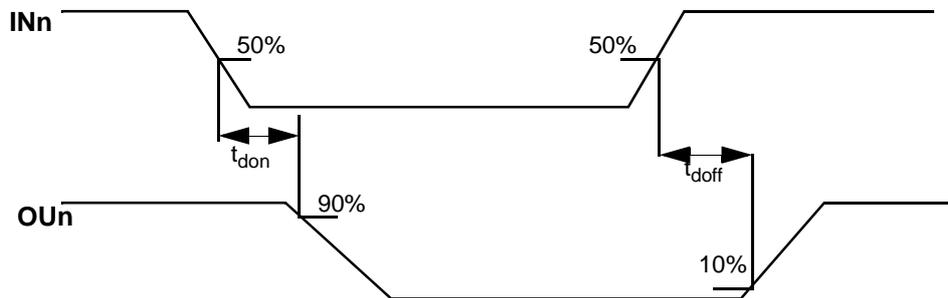



Figure 3. Disable Delay Time

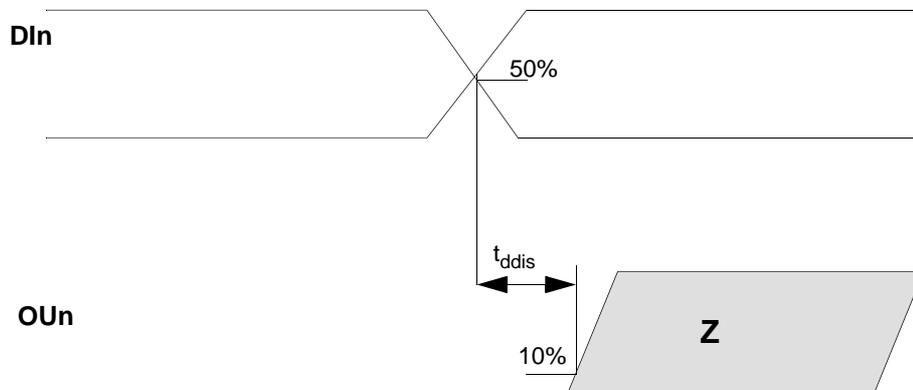


**Figure 4. Output Switching Time**

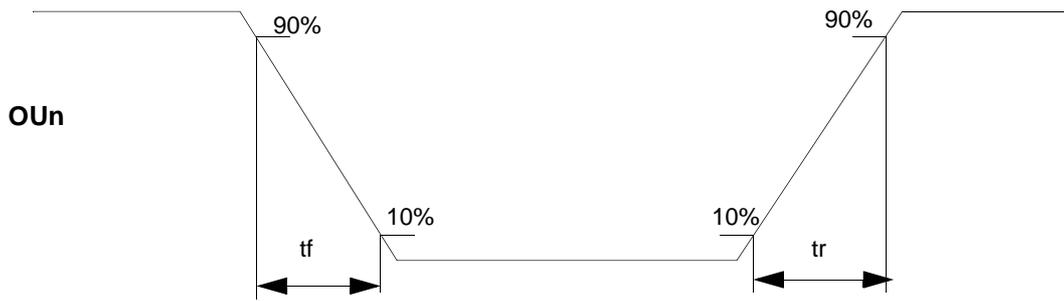


**Figure 5. Current Limitation**

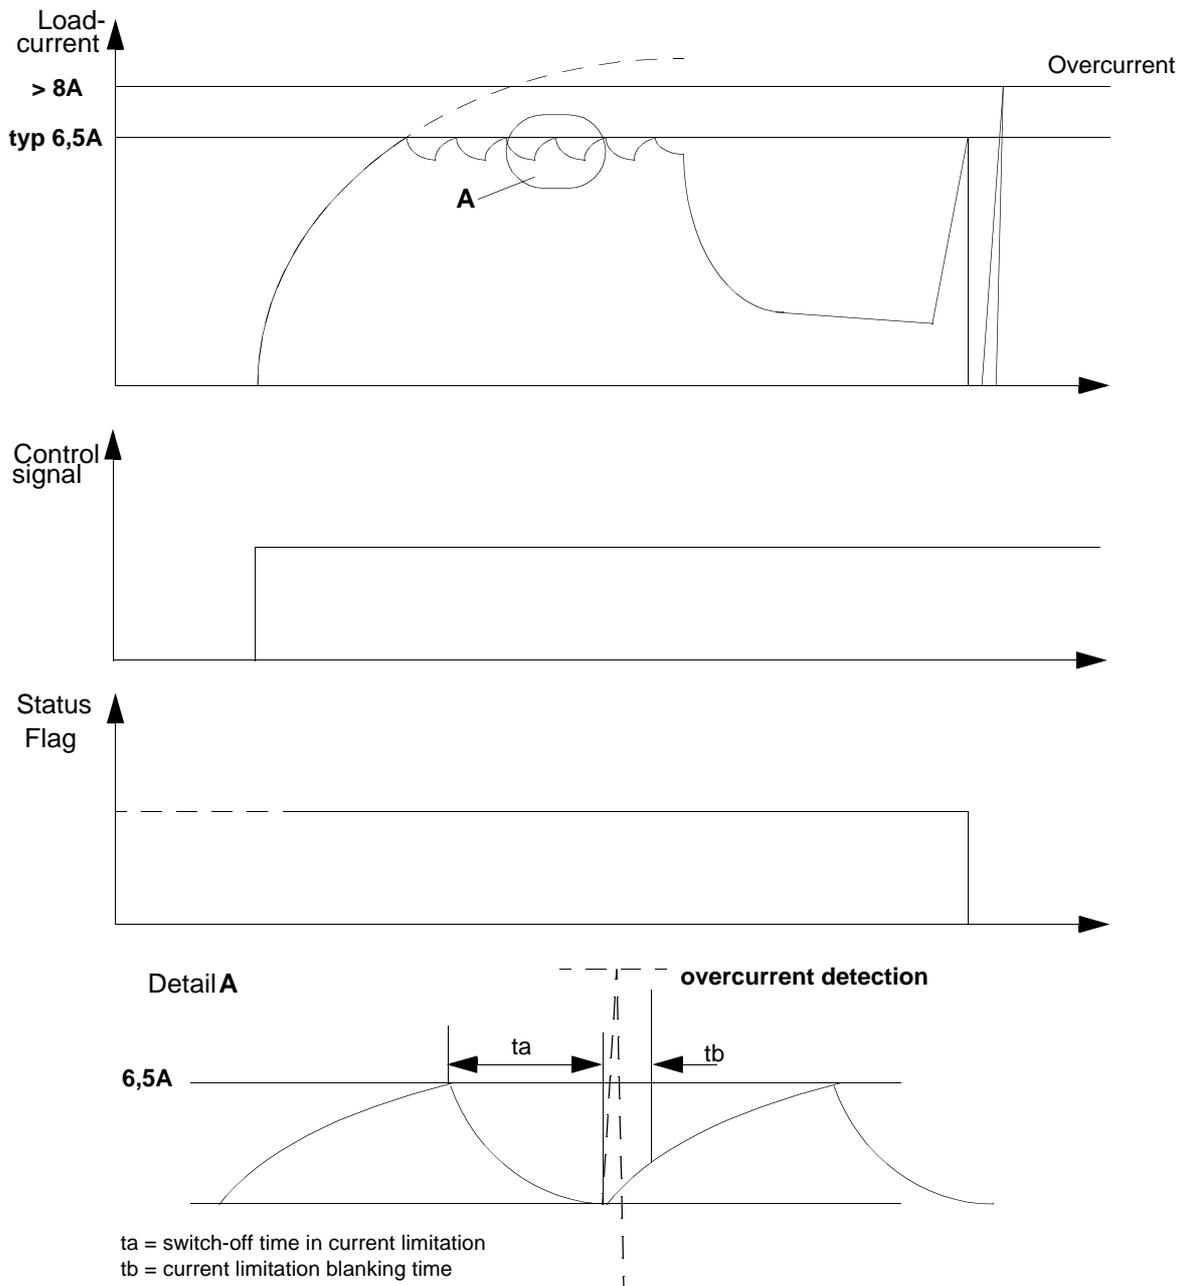


**Figure 6 - Standby Current versus Temperature**

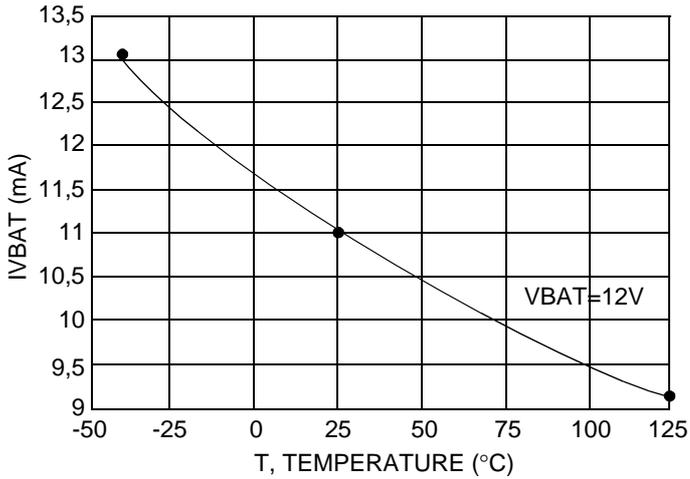


**Figure 7. VBAT Undervoltage versus Temperature**

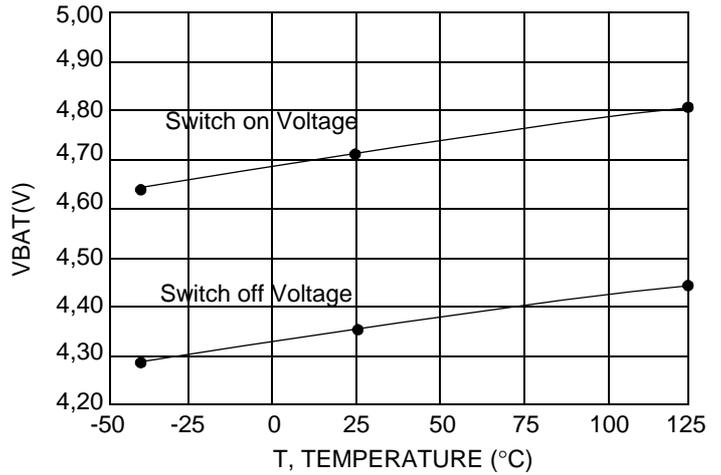


**Figure 8 - Low Threshold Input Voltage versus Temperature**

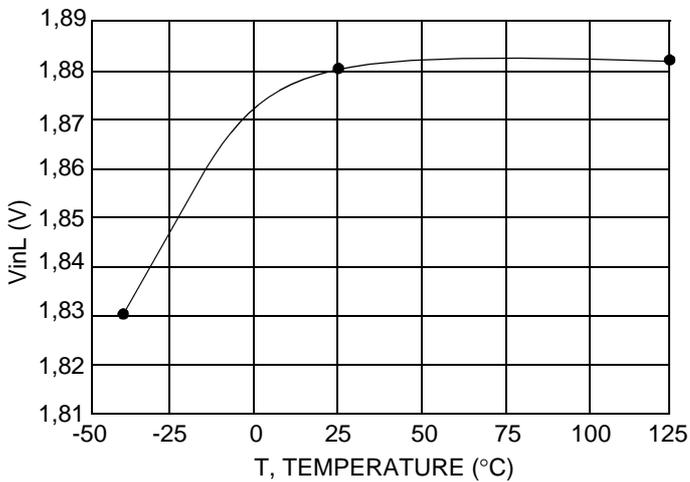

**Figure 9 - High Threshold Input Voltage versus Temperature**

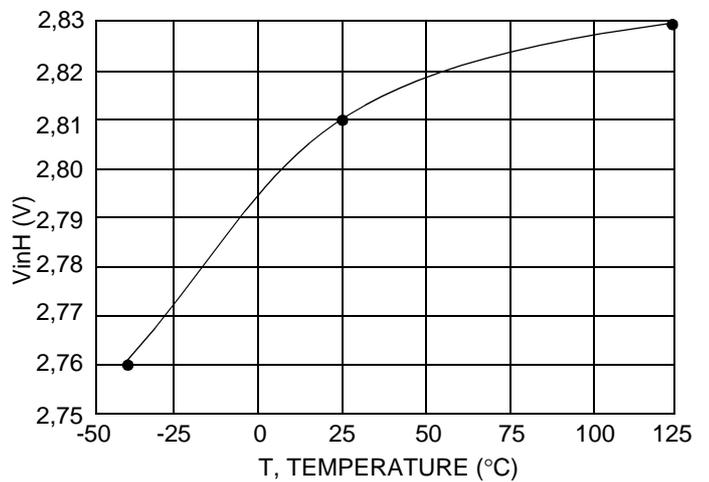

**Figure 10 - Vcp versus Battery Voltage**

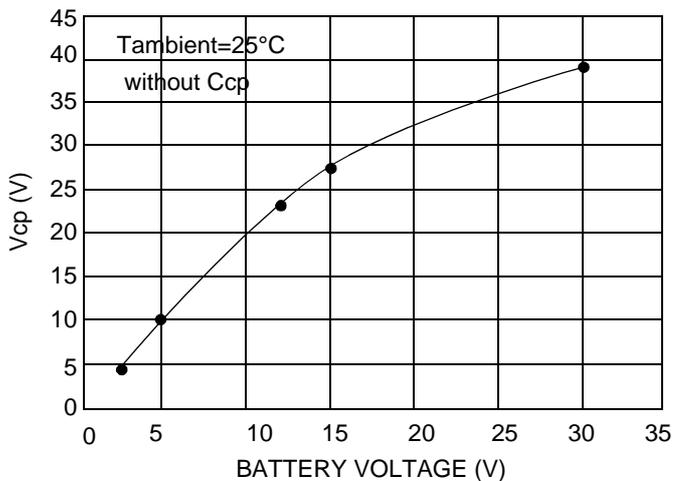

**Figure 11. RDSON versus Temperature**

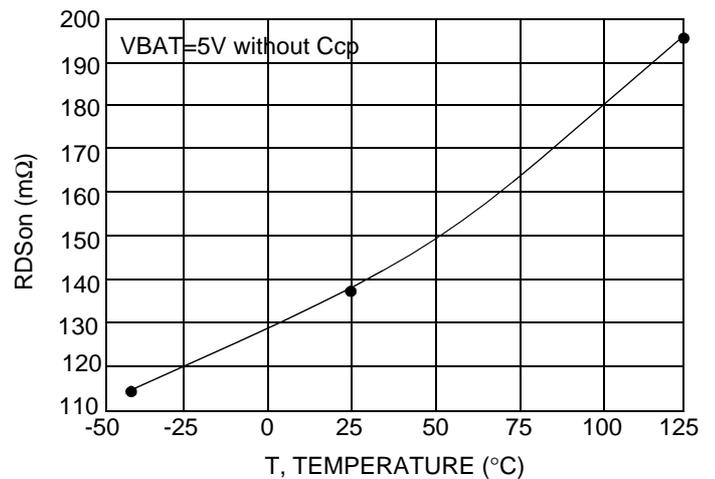


Figure 12. Switch off current versus Temperature

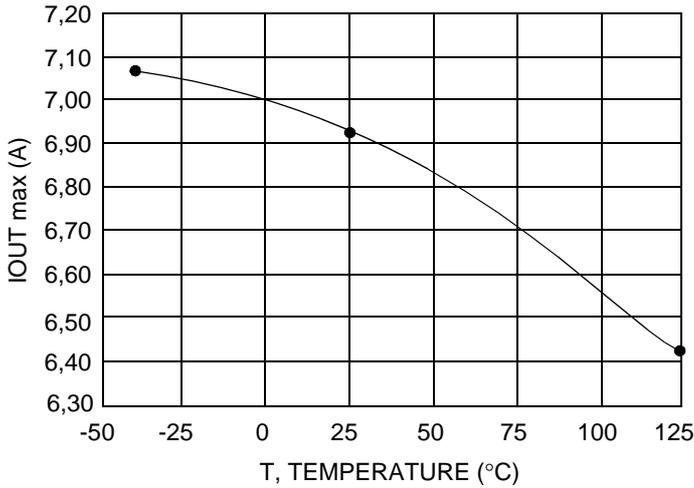


Figure 13. Over Current Detection versus Temperature

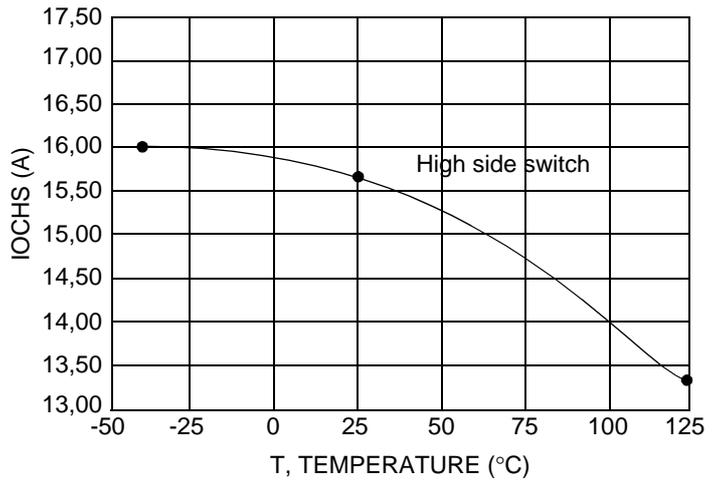


Figure 14. Current Limitation

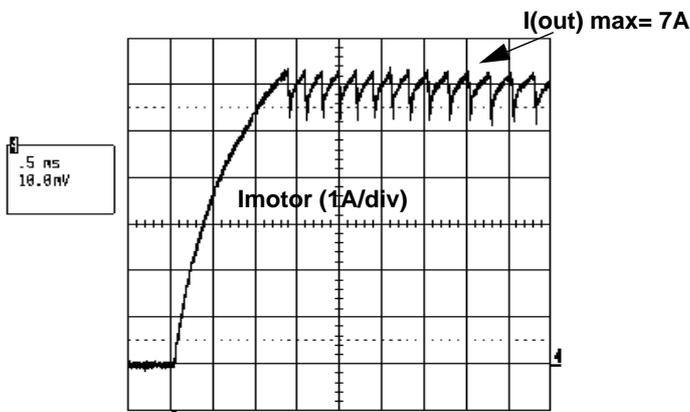


Figure 15. Switch off Time

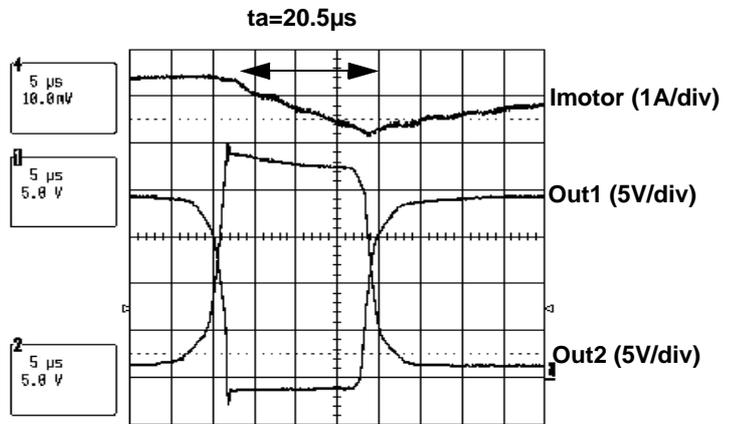


Figure 16. Output Switching Time: Tr

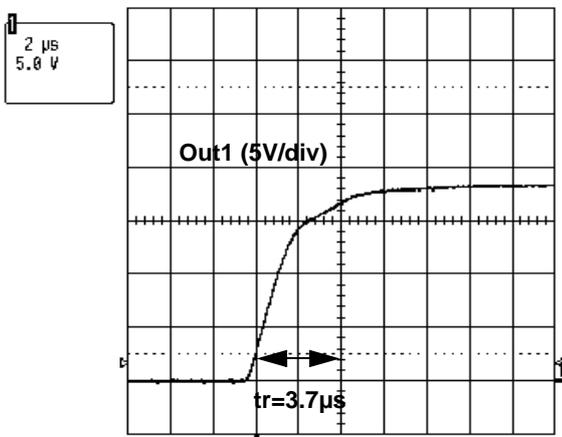


Figure 17. Output Switching Time: Tf

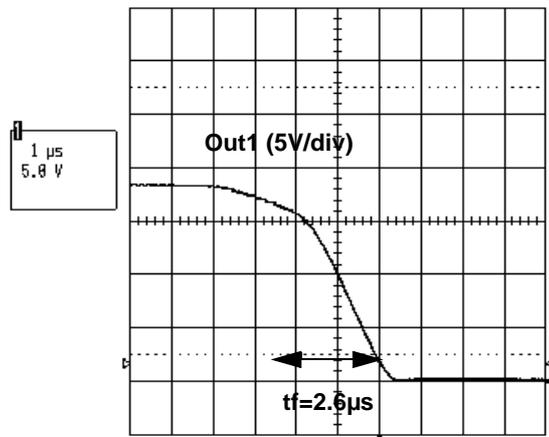


Figure 18. Output OFF Delay

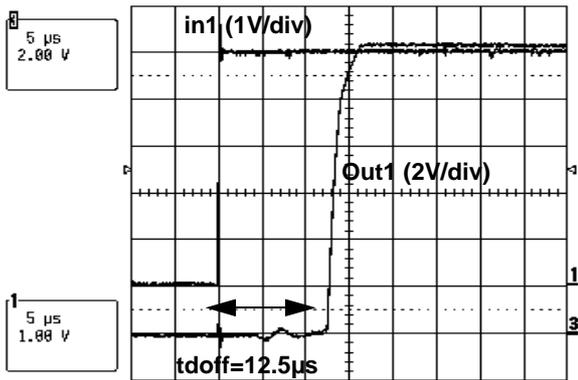


Figure 19. Output ON Delay

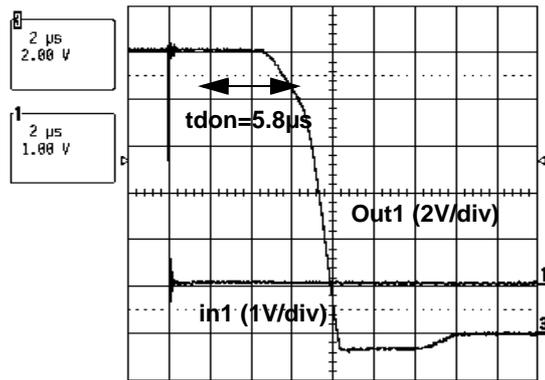


Figure 20. Disable Delay Time


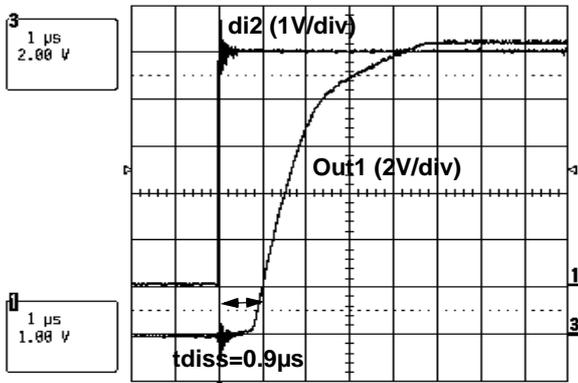


Figure 21. High side Overcurrent Detection

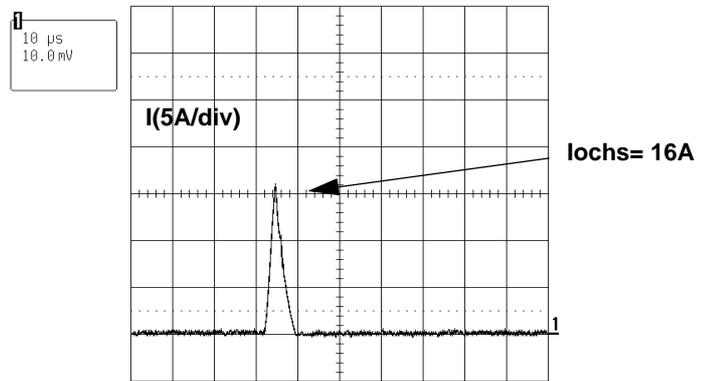


**PACKAGE INFORMATION**

The HSOP20 package is designed for enhanced thermal performance. The particularity of this package is its copper baseplate on which the power die is soldered. The baseplate is soldered on a PCB to provide heat flow to the ambient and also to provide a large thermal capacitance.

Of course, the more copper area on the PCB, the better the power dissipation and transient behaviour.

We characterized the HSOP20 on a double side PCB. The bottom side area of the copper is 7.8 cm<sup>2</sup>. The top surface is 2.7 cm<sup>2</sup>, see Figure 22.

**Figure 22. PCB Test Layout**

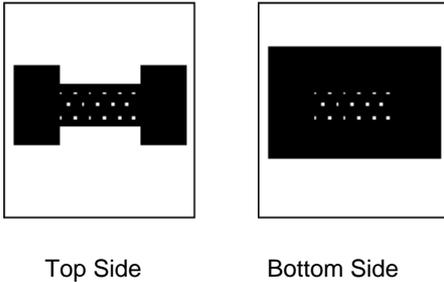

**Figure 23. PHSOP20 Thermal Response**


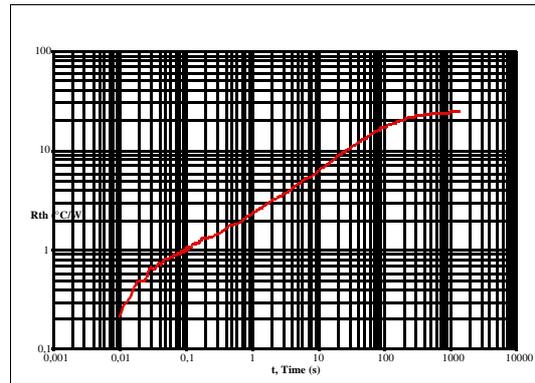


Figure 23 shows the thermal response with the device soldered on to the test PCB described on figure 22.

CASE OUTLINES

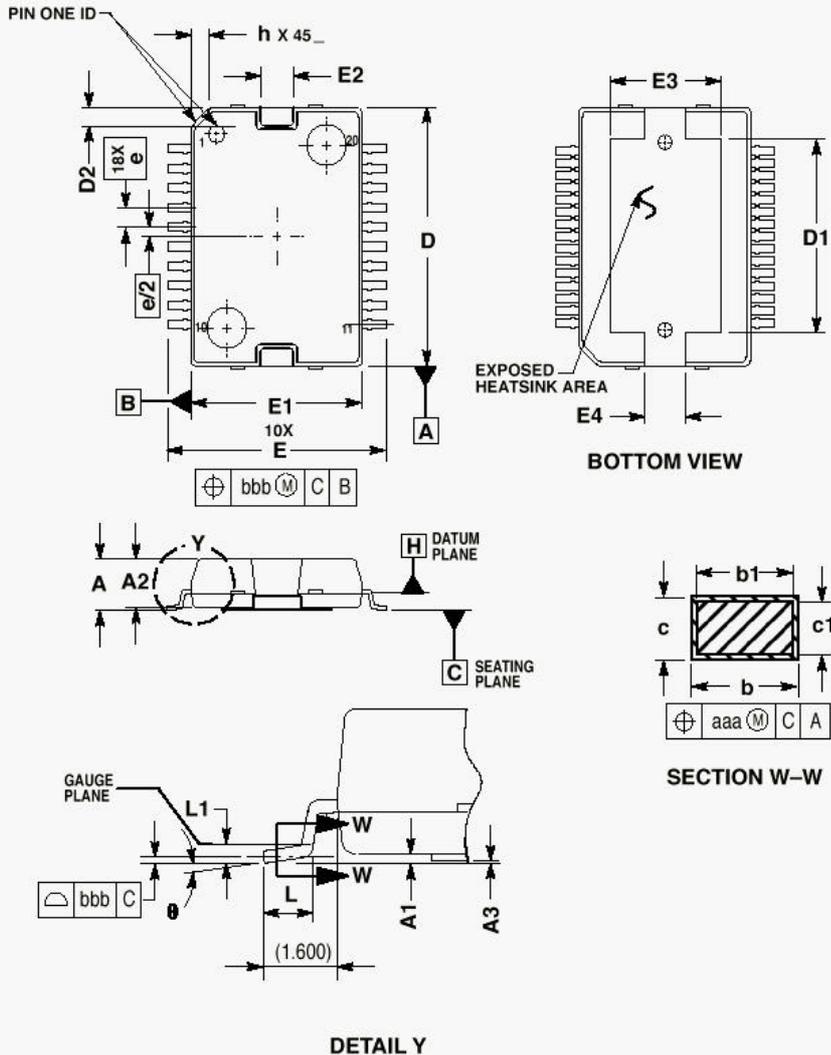

NOTES:

1. CONTROLLING DIMENSION: MILLIMETER.
2. DIMENSIONS AND TOLERANCES PER ASME Y14.5M, 1994.
3. DATUM PLANE -H- IS LOCATED AT BOTTOM OF LEAD AND IS COINCIDENT WITH THE LEAD WHERE THE LEAD EXITS THE PLASTIC BODY AT THE BOTTOM OF THE PARTING LINE.
4. DIMENSIONS D AND E1 DO NOT INCLUDE MOLD PROTRUSION. ALLOWABLE PROTRUSION IS 0.150 PER SIDE. DIMENSIONS D AND E1 DO INCLUDE MOLD MISMATCH AND ARE DETERMINED AT DATUM PLANE -H-.
5. DIMENSION b DOES NOT INCLUDE DAMBAR PROTRUSION. ALLOWABLE DAMBAR PROTRUSION SHALL BE 0.127 TOTAL IN EXCESS OF THE b DIMENSION AT MAXIMUM MATERIAL CONDITION.
6. DATUMS -A- AND -B- TO BE DETERMINED AT DATUM PLANE -H-.
7. DIMENSION D DOES NOT INCLUDE TIEBAR PROTRUSIONS. ALLOWABLE TIEBAR PROTRUSIONS ARE 0.150 PER SIDE.

DIM	MILLIMETERS	
	MIN	MAX
A	3.000	3.400
A1	0.100	0.300
A2	2.900	3.100
A3	0.00	0.100
D	15.800	16.000
D1	11.700	12.600
D2	0.900	1.100
E	13.950	14.450
E1	10.900	11.100
E2	2.500	2.700
E3	6.400	7.200
E4	2.700	2.900
L	0.840	1.100
L1	0.350 BSC	
b	0.400	0.520
b1	0.400	0.482
c	0.230	0.320
c1	0.230	0.280
e	1.270 BSC	
h	1.100	
Ø	0	8
aaa	0.200	
bbb	0.100	

Motorola reserves the right to make changes without further notice to any products herein to improve reliability, function or design. Motorola does not assume any liability arising out of the application or use of any product or circuit described herein ; neither does it convert any licence under its patent rights of others. Motorola products are not authorized for use as components in life support devices or systems intended for surgical implant into the body or intended to support or sustain life. Buyer agrees to notify Motorola of any such intended end use whereupon Motorola shall determine availability and suitability of its products for the use intended. Motorola and are registered trademarks of Motorola, Inc. Motorola, Inc. is an Equal Employment opportunity/Affirmative Action Employer.

**SUNSTAR 商斯达实业集团**是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有 10 多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌 IC 芯片和电子元器件的连锁经营综合性国际公司，专业经营进口、国产名厂名牌电子元件，型号、种类齐全。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM 电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA 软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。商斯达实业公司拥有庞大的资料库，有数位毕业于著名高校——有中国电子工业摇篮之称的西安电子科技大学（西军电）并长期从事国防尖端科技研究的高级工程师为您精挑细选、量身订做各种高科技电子元器件，并解决各种技术问题。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>

传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83370250 83376489 83376549 83607652 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: [SUNS8888@hotmail.com](mailto:SUNS8888@hotmail.com)

邮编：518033 E-mail:[szss20@163.com](mailto:szss20@163.com) QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场 2583 号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)

西安劳动南路 88 号电子商城二楼 D23 号

TEL: 029-81022619 13072977981 FAX:029-88789382