


TO5

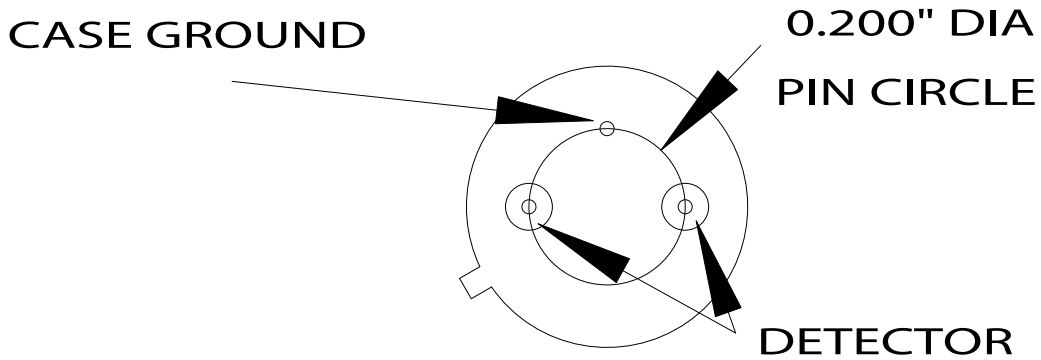

Note:

The detector is connected to the two through pins. There is no polarity for the detector and the third pin is a case ground.

| | | | | | | | | |
|-------------------------------------|--|-----------|------|---|-----------------|------|-------------------|-----|
| DO NOT SCALE DRAWING | DRAWN | | DATE | N.E.P. NEW ENGLAND PHOTOCONDUCTOR | | | | |
| | CHECKED | | DATE | | | | | |
| | DESIGNER | GG | DATE | FAM-1-5 | | | | |
| | ENGINEER | PB | DATE | | | | | |
| MATERIAL: | PROJECT ENGINEER | | DATE | SIZE | CODE IDENT. NO. | TYPE | M SERIES | REV |
| FINISH SPECS: | PROJECT APPROVAL PMB 2/1/99 | | | A | | | | |
| | SUNSTAR传感与控制 http://www.sensor-ic.com/ TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szss20@163.com | | | SCALE none | | | SHEET 1 | |