

**SPECIFICATION
of
THERMOPILE
INFRARED SENSOR
UNIT**

TSE 01/08 L

PART NO. :

Rev.1.0

1. SCOPE

This specification describes a Thermopile Infrared Sensor Unit for non-contact temperature measurement

2. TYPE of UNIT

2.1. TYPE NAME

Thermopile Infrared Sensor Unit

2.2. MODEL NO.

TSE 01/08 L

3. DIMENSIONS

See Fig. 1.

Production Lot No. is put on a Unit.

4. GENERAL CHARACTERISTICS

Table 1

PARAMETER	STANDARD
4.1. Thermopile Sensor	8 Element Linear Array Unit Thermopile (3 Digital Address Signal Inputs, Built-in 8ch Analog Multiplexer)
4.2. Optics	Silicon Lens
4.3. Outputs	Thermopile Signal Output (for Incident Infrared Energy Detection) Thermistor Signal Output (for Ambient Temp. Detection) (* Both analog outputs are supplied individually.
4.4. Time Constant	Max.30msec.
4.5. Circuit Configuration	See Fig. 2
4.6. Detection Area	See Fig. 3
4.7. Crosstalk	See Fig. 4
4.8. Detecting Temperature Range	-20 ~ 100 deg Celsius
4.9. Accuracy 1 Accuracy 2	Within (+/-) 2 deg Celsius (Open) Within (+/-) 1 deg Celsius (Heat Source 60 ~ 80 deg Celsius)
4.10. Operating Temperature	0 ~ 70 deg Celsius
4.11. Storage Temperature	-20 ~ 90 deg Celsius
4.12. EEPROM	128w*8bit,1kb Serial Interface 2-Wire (* For Calibration Data Input

PART NO. :

Rev.1.0

5. ELECTRICAL CHARACTERISTICS

Table 2

PARAMETER	CONDITION	STANDARD
5.1 Thermopile Signal Output	Object Temp. : 72 deg Celsius Ambient Temp. : 20 deg Celsius Distance : 250 mm	2.40 V (+/-) 1.2 % (After each element correcte)
5.2 Temperature Characteristics of Thermopile Signal Output	Object Temp. : -20 ~ 100 deg Celsius (Ambient Temp. : 10 ~ 50 deg Celsius) When Ambient Temp. 70 deg Celsius, Object Temp. : 20 ~ 100 deg Celsius	See Data 1
5.3 Thermistor Signal Output	Ambient Temp. : 20 degrees Celsius	0.484 V (+/-) 3 %
5.4 Temperature Characteristics of Thermistor Signal Output	Ambient Temp. : 10 ~ 50 deg Celsius	See Data 2
5.5 Reference Voltage	25 deg Celsius	1.225 V (+/-) 25%
5.6 Supply Voltage	Single Power Supply	5 V DC (Maximum Rating : 5.25 V DC)
5.7 Current Consumption	+Vs = 5 V Supply	Max. 5 mA
5.8 Output Current	Short Circuit to Ground	Max. 60 mA

6. MEASUREMENT METHOD

6.1. Thermopile Signal Output
See Fig. 5.

7. NOTES

7.1. Design restrictions/precautions

For outdoor applications, be sure to apply suitable supplementary optical filter, drip-proof and anti-dew construction. This Unit is designed for indoor use.
In cases where secondary accidents due to operation failure or malfunctions can be anticipated, add a fail safe function to the design.

7.2. Usage restrictions/precautions

To prevent Unit malfunctions, operational failure or any deterioration of its characteristics, do not use this Unit in the following, or similar, conditions.

- 7.2.1 Use in rapid environmental temperature changes.
- 7.2.2 Use in strong shock or vibration.
- 7.2.3 Use under the condition where there are obstructing materials (Glass, Fog, etc.) through which infrared rays cannot pass within detection area.
- 7.2.4 Use in fluid, corrosive gases and sea breeze.
- 7.2.5 Continual use in high humidity atmosphere.
- 7.2.6 Use in field of static electricity or strong electromagnetic waves.
- 7.2.7 Use under the condition exposed to direct wind from a heater or air conditioner.

7.3. Handling and storage restrictions/precautions


To prevent Unit malfunctions, operational failure, appearance damage or any deterioration of its characteristics, do not expose this Unit to the following or similar, handling and storage conditions.

- 7.3.1. Vibration for a long time.
- 7.3.2. Strong shock.
- 7.3.3. Static electricity or strong electromagnetic waves.
- 7.3.4. High or Low temperature and humidity for a long time.
- 7.3.5. Corrosive gases or sea breeze.
- 7.3.6. Dirty and dusty environments that may contaminate the optical window.

PART NO. :				Rev.1.0
------------	--	--	--	---------

Unit troubles resulting from misuse, inappropriate handling or storage are not the manufacturer's responsibility.



TOP VIEW

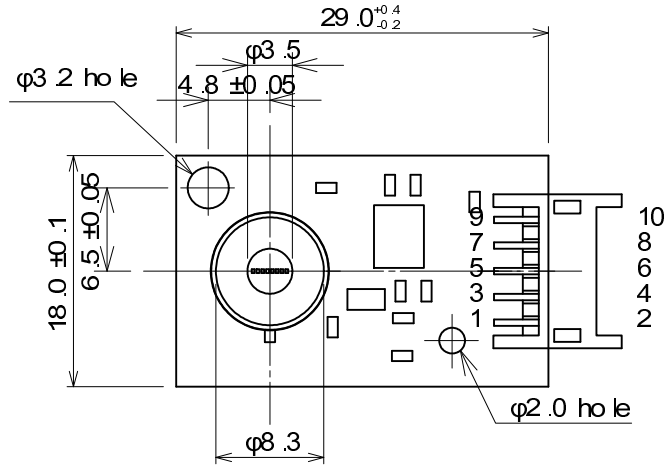

Pin Arrangement

- 10 : SELECT NUT A
- 9 : SELECT NUT B
- 8 : +Vs
- 7 : SELECT NUT C
- 6 : No Contact
- 5 : Vtp (Thermopile Signal Output)
- 4 : Vntc (Thermistor Signal Output)
- 3 : SDA
- 2 : Ground
- 1 : SCL

SIDE VIEW

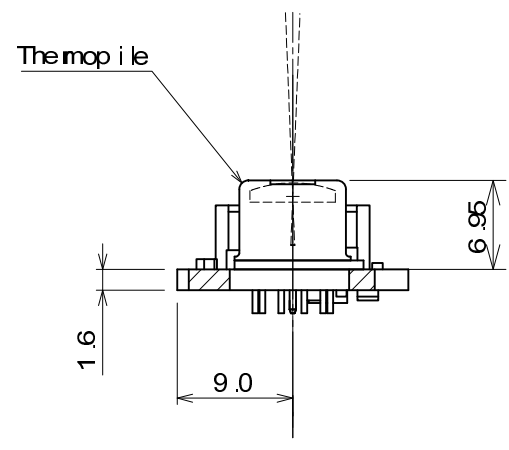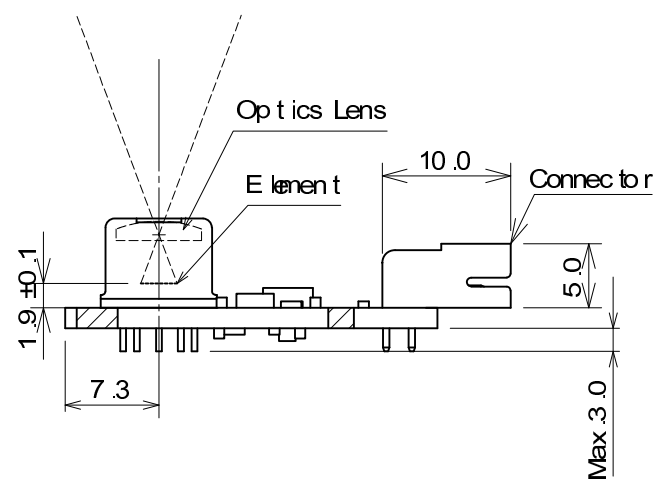

Tolerance : ±0.2

Fig. 1 : Dimensions, units in mm

PART NO. :				Rev.1.0
------------	--	--	--	---------

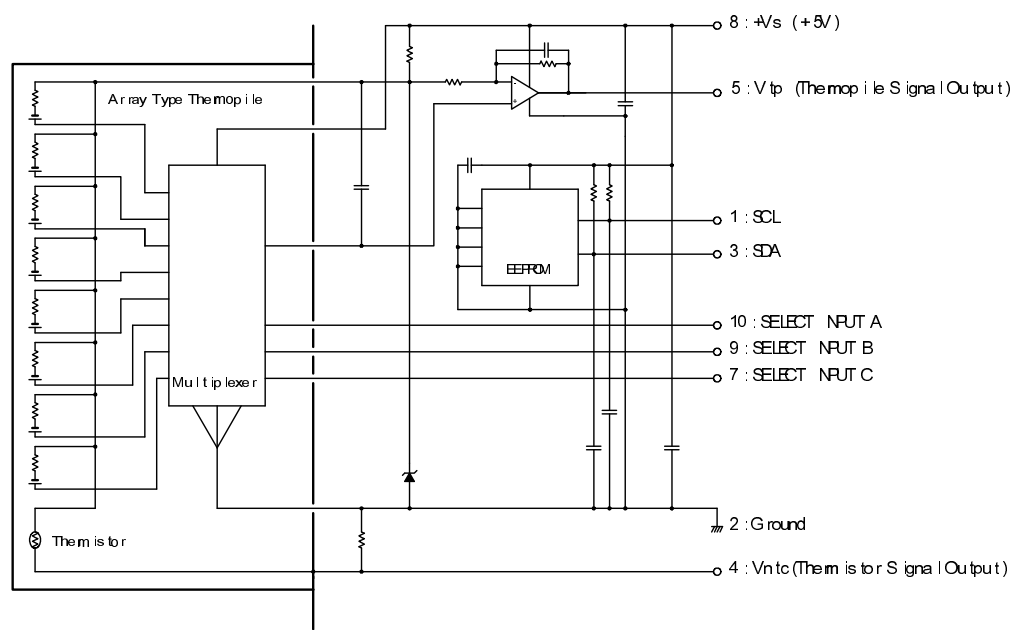


Fig. 2 : Circuit Configuration

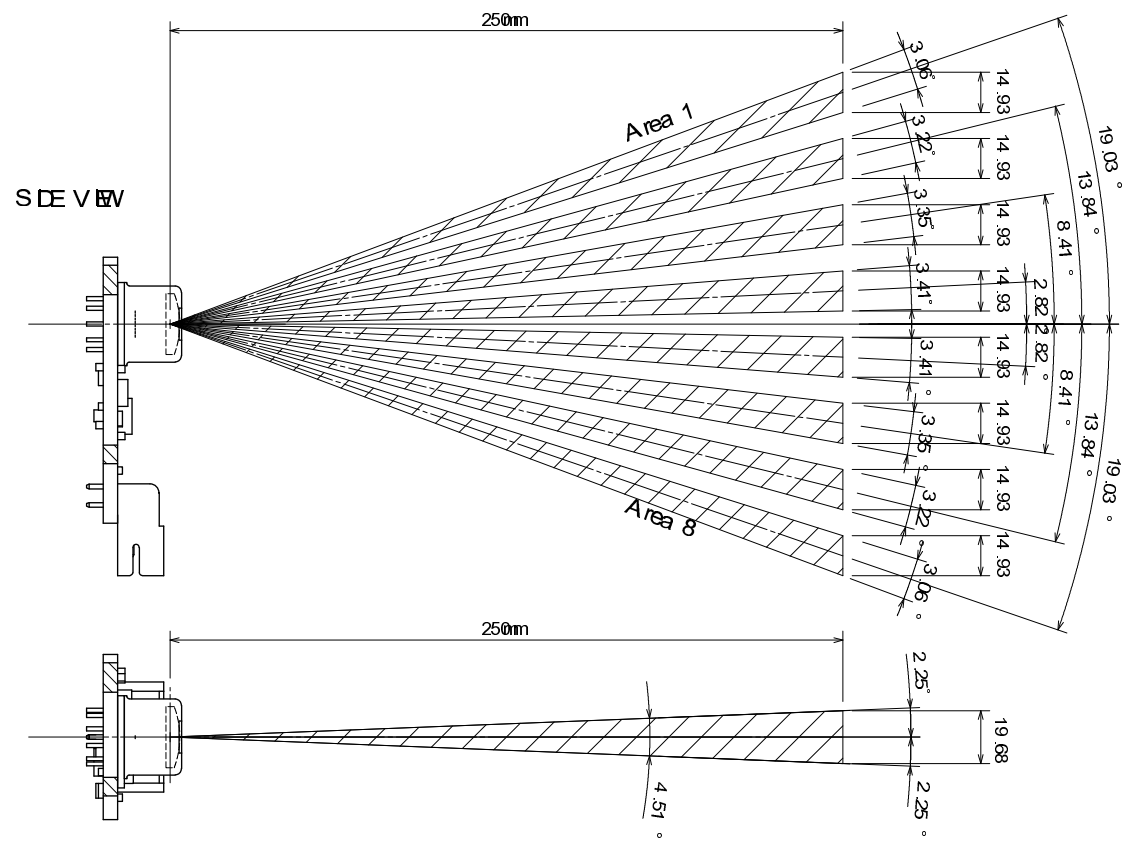


Fig. 3 : Detection Area

PART NO. :				Rev.1.0
------------	--	--	--	---------


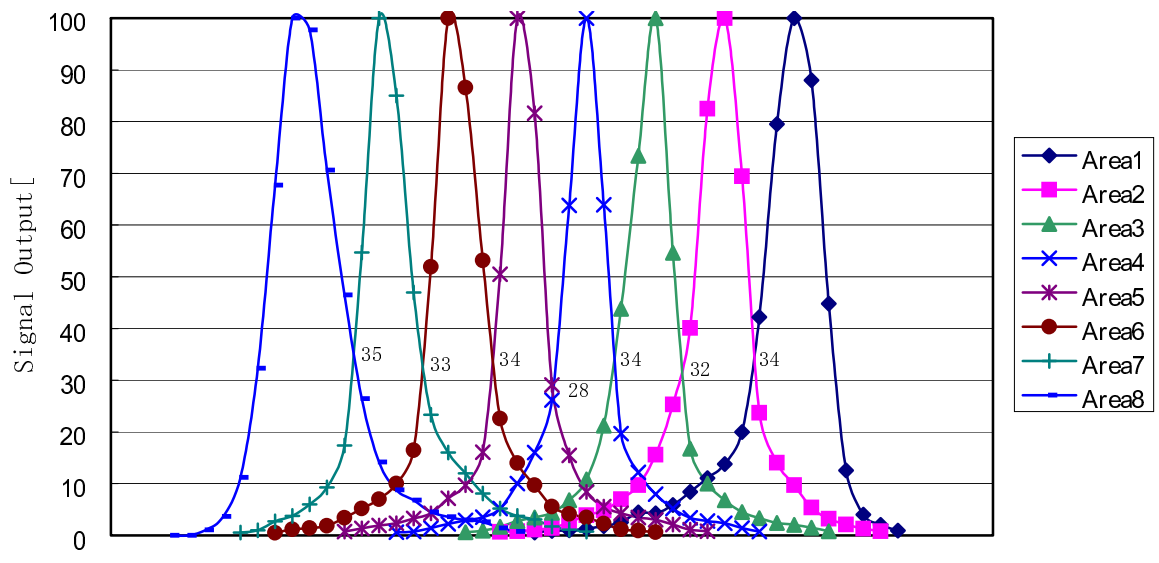


Fig. 4 : Crosstalk (Typ. Value)

Cover Box (Temp. Controlled inside Box)

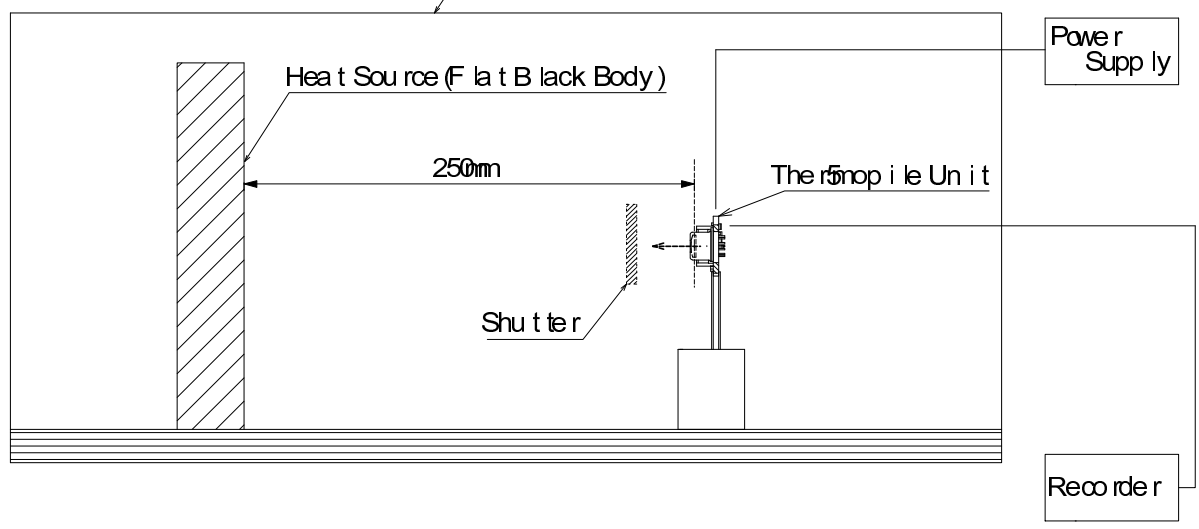


Object temp. : 72 degrees Celsius
 Ambient Temp. : 20 degrees Celsius
 Distance : 250 mm
 Supply Voltage : 5 V
 Reference Voltage : Typ. 1.225 V

** Thermopile Signal Output Shutter On/Off
 Shutter On(Open) : Infrared Incidence
 Shutter Off(Close) : Infrared Cut-off

Fig. 5 : Test Set-up Block Diagram


PART NO. :				Rev.1.0
------------	--	--	--	---------

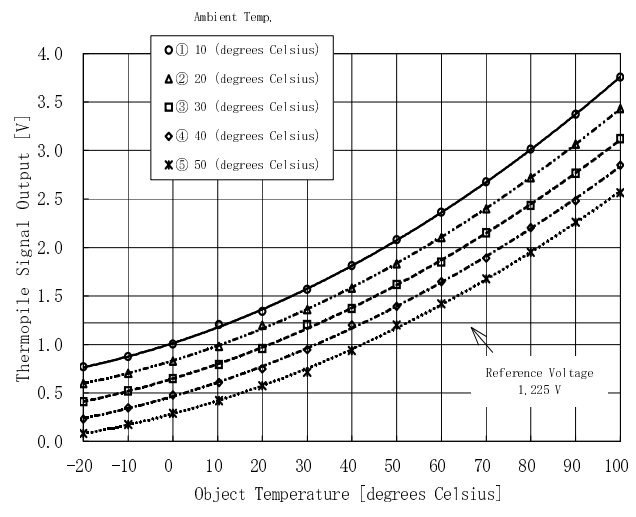

Ambient Temp. (degrees Celsius)	Typical Thermopile Signal Output for Object Temp. (degrees Celsius) [V]											Data		
	-20	-10	0	10	20	30	40	50	60	70	80		90	100
10	0.769	0.874	1.003	1.201	1.341	1.570	1.812	2.090	2.365	2.675	3.011	3.372	3.758	①
20	0.595	0.700	0.828	0.981	1.199	1.358	1.582	1.831	2.100	2.400	2.721	3.065	3.434	②
30	0.409	0.519	0.647	0.790	0.969	1.203	1.370	1.618	1.849	2.150	2.435	2.765	3.120	③
40	0.232	0.348	0.479	0.609	0.718	0.946	1.201	1.395	1.649	1.891	2.200	2.481	2.830	④
50	0.083	0.176	0.288	0.421	0.575	0.714	0.937	1.202	1.421	1.676	1.953	2.262	2.565	⑤

* Distance : 250 mm

Data 1 : Temperature Characteristics of Thermopile Signal Output

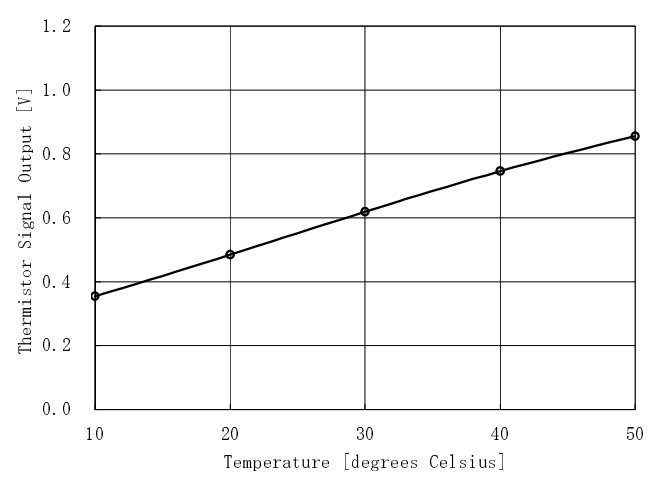

Temp. [degrees Celsius]	10	20	30	40	50	Data
Typical Thermistor Signal Output [V]	0.355	0.484	0.619	0.746	0.856	①

* Reference Voltage : Typ. 1.225 V

Thermistor
Resistance : Typ. R = 100 kohm (at 25 [degrees Celsius])
Beta Value : 3955K (+/-) 0.5 % (T1/T2 : 0/50 [deg Celsius])

Data 2 : Temperature Characteristics of Thermistor Signal Output

Select Inputs			Selected Pixel
A	B	C	
H	L	H	1
H	H	H	2
L	H	H	3
L	L	H	4
L	H	L	5
H	L	L	6
L	L	L	7
H	H	L	8

Multiplexer Truth Table