


# B32

轻触式开关用开关头

## B3F、B3FS、B3W的凸型 柱塞类型专用开关头

●有各种大小、形状、颜色等变化丰富。

符合RoHS

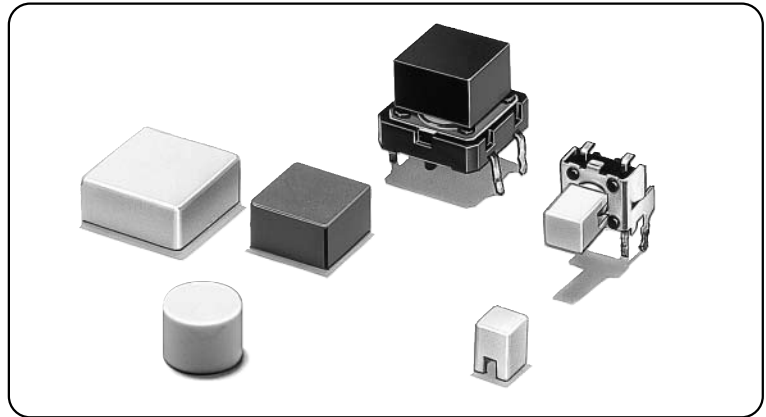

B  
3  
2

### ■种类

●B3F、B3FS、B3W专用

键顶颜色	键顶大小	用6mm方形开关 B3F-1000、3000、 6000系列 用B3W-1000系列 用B3FS系列			用12mm方形开关 B3F-4000、5000系列、 用B3W-4000系列		
		4×4mm	φ6mm圆型	D型	9×9mm	12×12mm	φ9.5mm
灰		B32-1000	B32-2000	B32-2100	B32-1200	B32-1300	B32-1600
黑		B32-1010	B32-2010	B32-2110	B32-1210	B32-1310	B32-1610
橙		B32-1020	—	—	B32-1220	B32-1320	B32-1620
黄		B32-1030	—	—	B32-1230	B32-1330	B32-1630
蓝		B32-1040	—	—	B32-1240	B32-1340	—
白		B32-1060	—	—	B32-1260	B32-1360	—
红		B32-1080	—	—	B32-1280	B32-1380	—




注. 最小包装单位, 1,000个/袋, 定货最需为最小包装单位的整数倍。

### ■性能


使用环境温度	-25~+70℃ 60%RH以下 (不结冰、凝露)
使用环境湿度	35~85%RH (+5~+35℃)

### ■外形尺寸 (单位: mm)




#### B32-10□0

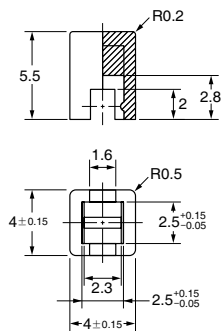


面板切割尺寸



#### B32-2000 B32-2010


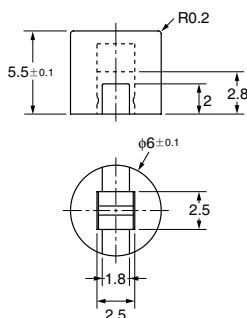


面板切割尺寸





## B32-2100



## B32-2110

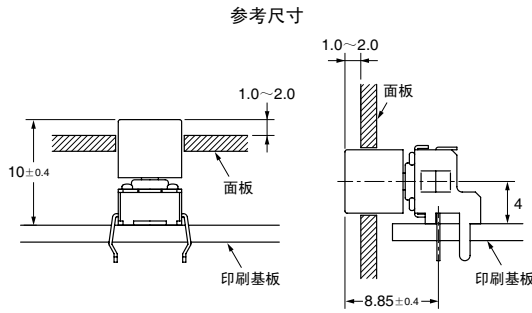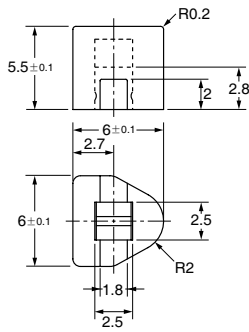



## B32-12□0

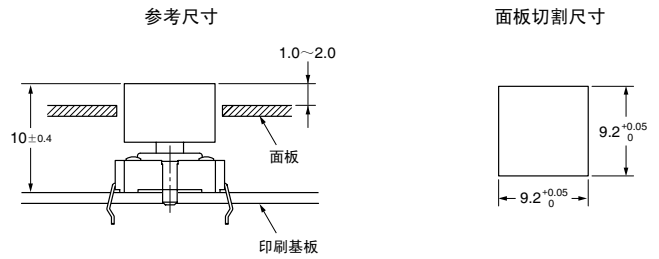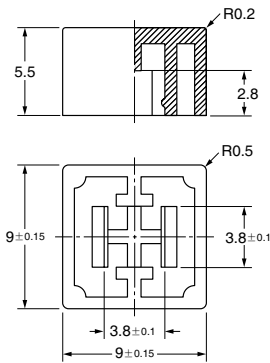

## B32-13□0

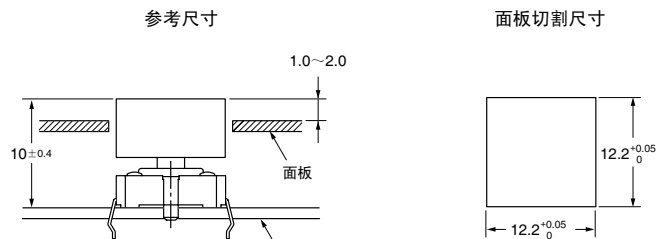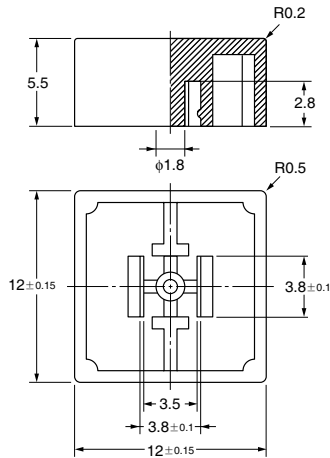

## B32-16□0

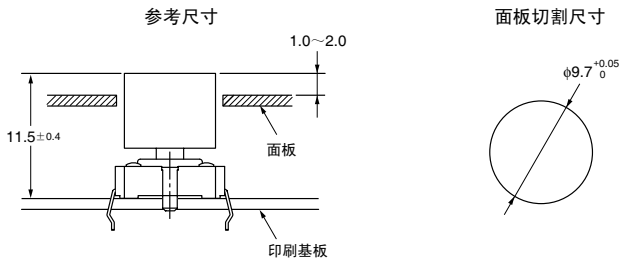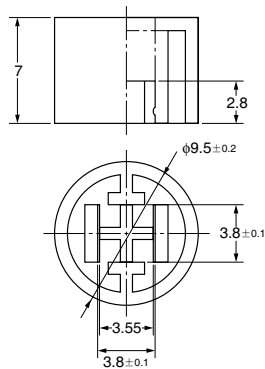

注. 上述外形尺寸图中, 未注公差 $\pm 0.4$ mm。