

DISOCONT® Measurement, Control and Supervisory System



- Field housing electronics integration able into scale mechanics
- New product line for 'MechaTronic scales' a synthesis of mechanics, electrics and software
- Reduced engineering planning and wiring costs
- Optimal communication structures because of modular fieldbus technology

Application

DISOCONT® is a modular electronics system applicable to any weighing and feeding system. It is used wherever bulk solids flow has to be measured, feeded or batched with the use of

- Loss-in-weight feeders (measuring/feeding)
- Weighfeeders
- Mass flow meters and feeders
- Solids flow meters and feeders
- Belt weighers
- Weighing hoppers

The DISOCONT electronics are preferably integrated locally into the scale mechanics. So self-contained function units will be created - the MechaTronic scales - which offers numerous advantages:

- Reduced engineering because of minimal number of interfaces; only one unit has to be planned in
- No control cubicle
- Reduced cabling; only power and data cables have to be run

- At a glance - easy service because of the combination of mechanics and electronics.

DISOCONT electronics may be conventionally installed in a control cubicle (e.g. for use with feeders in hazardous zones). The DISOCONT equipped with appropriate communication module optimally integrates into the automation structure via field bus.

Equipment

The DISOCONT electronics consist of a system unit and multiple optional expansion units. Its modular design enables the requisite units to be combined for a specific application, at a most cost effective price.

- System unit for all measuring and control functions; equipped with service plug for connection of laptop or control unit, for configuration, calibration and service with an exchangeable memory module for system specific settings and operating values

- Fieldbus communication modules plugged into system unit for transfer of all relevant data to the user's control and scale control system

- Input/output unit for conventional connection to user's control system and expanded control of the scale environment
- EasyServe - PC-program for commissioning and service
- Operator panel with clear graphic text display for local scale control and/or parametrization of standard applications.
- Group control unit- operation, survey and control of scale groups, as shown in separate spec sheet

The internal DISOCONT® communication bus permits a flexible arrangement of the I/O units, locally or in cabinets.

All modules can be replaced with no need for recalibration and reconfiguration (Plug & Play).

The program includes housing options for installation at site and in control cubicles.

BV-D2051GB

Technical features for all weighing and feeding systems:

- System accuracy for scales better than 0,05% (DIN 43782);
- Galvanically isolated inputs/ outputs;
- Pluggable, fail-safe memory module;
- Factory presettings for easy and quick commissioning;
- Various languages loadable/ transferrable;
- Status, event, calibration, and batch reports ;
- Batch control with adaptive cut-off curve;
- Integrated diagnostics and self testing functions (SPC) ;
- Simulation mode for testing and learning.

Functions

DISOCONT is designed to acquire the actual feed rate [kg/h, t/h] via

- belt load and belt speed for belt weighers;
- changes in weight of material in weigh hopper per unit of time for loss-in-weight feeders;
- reactive force for solids flow meters;
- direct mass flow measurement using the Coriolis force for mass flow meters.

With **feeding** applications, the control deviation is acquired by feed rate set/ actual comparison. Depending on type of scale, DISOCONT routes a control signal to

- speed-controlled weigh-feeder drive,
- controllable loss-in-weight feeder discharge unit ,
- controllable solids and mass flow feeders' prefeeders.

The control circuit exactly controls the actual feed rate for conformity with setpoint. In batching mode, DISOCONT feeds a preset amount of material. System uses batch results for automatic selfoptimization.


Scale Specific Functions

Depending on the loaded scale software, the following function are available.

- With belt weighers and weighfeeders:
 - Accurate belt speed measurement
 - Belt run monitoring
 - Shifting of control for weighing/ feeding to point of discharge
 - Belt influence compensation (BIC)
 - Auto-calibration (automatic calibration programs), self-starting taring
 - Block control with weigh-feeders = constant belt load realized by pre-feeder control
 - On stream material check


- With solids flow meters and feeders:
 - Adaption to different measuring chute characteristics;
 - Manual and automatic zeroing;
 - On stream material check.
- With mass flow meters and feeders:
 - Accurate speed and torque measurement;
 - Manual and automatic zeroing;
 - Highly constant feeding;
 - On stream material check.
- With loss-in-weight feeders (measuring and feeding):
 - Adaptive FUZZY interference peak elimination;
 - Automatic correction of material flow properties during filling;
 - Highly constant feeding;
 - 4 sets of parameters for quick adaptation on different bulk solids.
- Sequential batching:
 - Sequence of up to 10 material types;
 - Adaptive feed control.

Dimensions (mm)

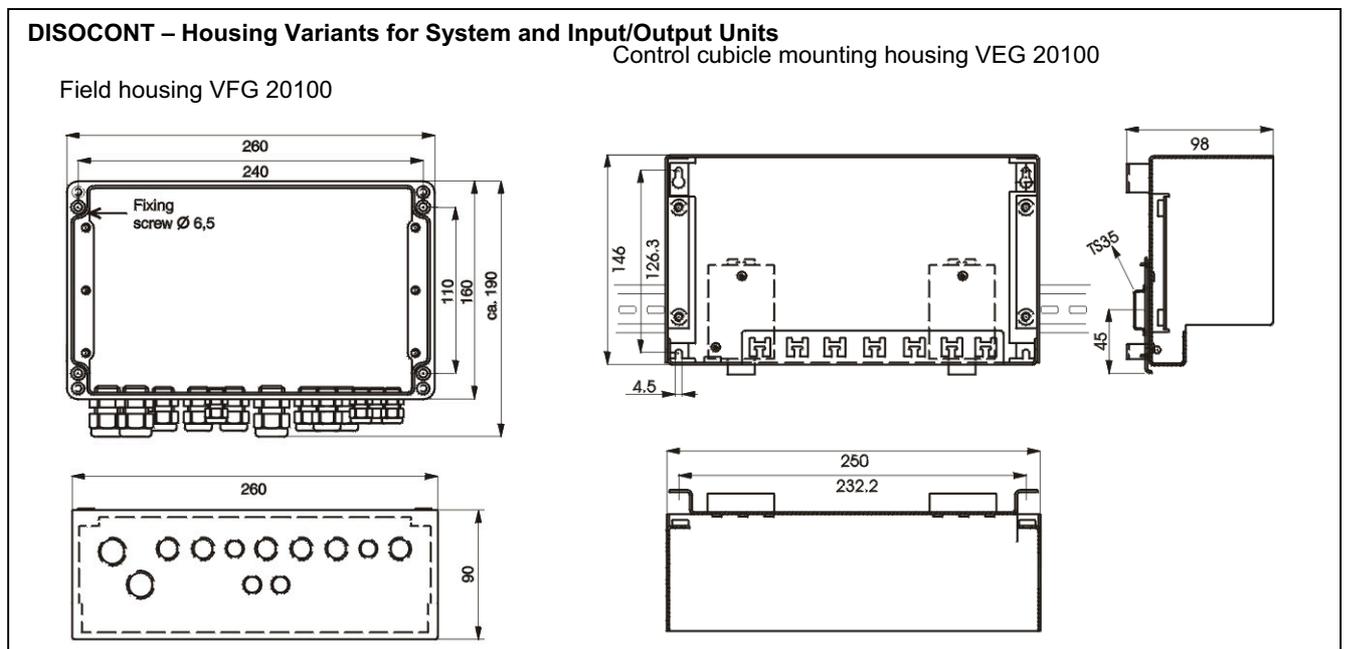


DISOCONT – Versions for Housing of the Control Unit

Field housing VLB 20120

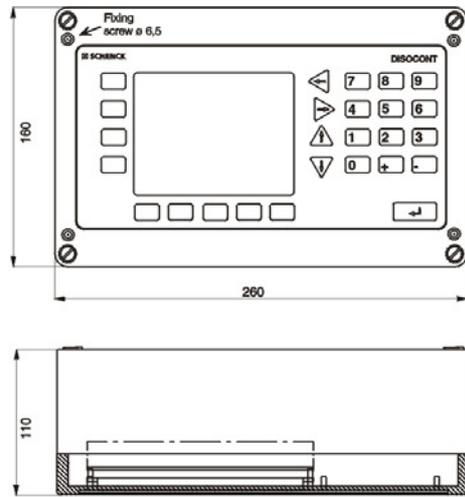

VLB 20100, VLB20105
In control panel/control cubicle housing

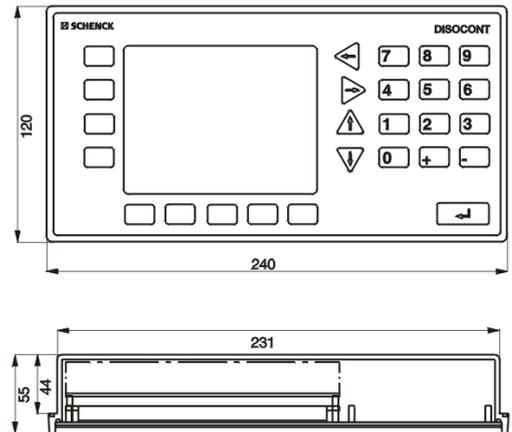

Technical Data

DISOCONT - System Unit VSE 20100

Power supply	24 VDC \pm 20 %; 110 V - 230 V -20 % +10 % (50 Hz or 60 Hz); 20 W
Ambient temperature	-25 °C ... +50 °C outside housing
Inputs*)	Load cell input (+/- 6 V, $R_i > 87 \Omega$) 2 NAMUR-Inputs (0,03 - 3000 Hz for speed, belt circuit/gate feedback signal) 2 isolated digital inputs (24 V, 20 mA, safety separated)
Outputs*)	1 isolated analog output (0/4 mA ... 20 mA, max. 11 V) 4 relay outputs, safety separated (24 V or 230 V with combinations: 3 x 24 V and 1 x 230 V, or 3 x 230 V and 1 x 24 V; 8 A Ω / 1 A induct.)
Interfaces	RS 232 (Service PC with EasySer- ve) Internal Disocont-Bus
Standards	CE, UL

Field Housing VFG 20100 for System or Input/Output Units

Material	Glass fibre reinforced plastics
Dimensions	260 mm x 160 mm x 90 mm
Protected to	IP 65 (as per IEC 60 529), NEMA4-type

DISOCONT - Input/Output Unit VEA 20100

Power supply	24 VDC \pm 20 %; 110 V - 230 V -20 % +10 % (50 Hz or 60 Hz); 20 W
Ambient temperature	-25 °C ... +50 °C outside housing
Inputs*)	1 isolated analog output (0/4 ... 20 mA / 250 Ω) 4 potential-free digital inputs (24 V, 20 mA, safety separated)
Outputs*)	1 isolated analog output (0/4 mA ... 20 mA, max. 11 V) 1 Impuls output (max. 50 mA) 5 relay outputs, safety-separated (24 V or. 230 V with combinations: 4 x 24 V and 1 x 230 V or 4 x 230 V and 1 x 24 V; 8 A Ω / 1 A induct.)
Interfaces	RS 232 (printer) Internal Disocont-Bus
Standards	CE, UL

*) Internal signals are freely configured for physical in-/outputs.

Control Cubicle Housing VEG 20100 for System Unit or Input/Output Unit

Material	Stainless steel
Dimensions	250 mm x 146 mm x 98 mm For installing an DIN top-hat-rail or for wall mounting
Protected to	IP 20 (as per IEC 60 529)



DISOCONT-Control Unit VLB 20120 in Field Housing

Material	Glass fibre reinforced plastics
Dimensions	260 mm x 160 mm x 110 mm
Protected to	IP 65 (as per IEC 60 529), NEMA4-type
Display	LCD-graphics display (100 mm x 75 mm) Character height (3,5 mm or 9 mm)
Keyboard	Flexible membrane keyboard
Power supply	24 VDC \pm 20%; 110 V - 230 V -20% +10% (50 Hz or 60 Hz); 20 W
Ambient temperature	-20 °C ... +50 °C outside housing
Interface	Internal Disocont-Bus interface
Standards	CE, UL

DISOCONT - Basic Units

System Unit VSE 20100 with power supply

Memory Module VSM 20100, VSM 20101, VSM 20102

Field housing without electronics VFG 20100

Suitable for system unit, input/output unit

Control cubicle housing without electronics VEG 20100

Suitable for system unit, input/output unit

DISOCONT - Function Modules

Belt weigher software

Weighfeeder software

Loss-in-weight feeder software

Solids flow meter software

Solids flow feeder software

Mass flow meter software

Mass flow feeder software

Sequential batching software

Optional DISOCONT group rate control station
see separate data sheet BVD 2076

DISOCONT-Control Unit VLB 20100 in Control Panel/Cubicle Housing

Material	Plastics
Dimensions	Required space: 240 mm x 120 mm x 65 mm Cut-out: 231+0,5 mm x 111+0,5 mm
Protected to	Front to IP 65 (as per IEC 60 529) Rear to IP 20 (as per IEC 60 529)
Display	LCD-graphics display (100 mm x 75 mm) Character height (3,5 mm or 9 mm)
Keyboard	Flexible membrane keyboard
Power supply	0 °C ... +50 °C outside housing
Ambient temperature	Internal Disocont-Bus interface
Interface	CE, UL
Standards	

**The control unit VLB 20100 requires an in-
put/output unit for power supply.**

**DISOCONT-control unit VLB 20105 in control-
panel / control cubicle housing like VLB 20100,
however**

Dimensions	240 mm x 120 mm x 85 mm required space
Power supply	100 V – 240 V (50 Hz or 60 Hz); 15 W

DISOCONT - Expansion Units

Input/output unit VEA 20100 with power supply

Control unit VLB 20120 in field housing with power supply

Control unit VLB 20100 in control panel/cubicle housing with
2 m cable for connection to VEA 20100 input/output unit

Control unit VLB 20105 in control-panel/control cubicle com-
plete with power supply

EasyServe -PC-Program VPC 20150 on CD

Optional Communication Modules

MULTICONT- Modbus-, J-Bus
or 3964(R) SE-Bus-, - Module VSB 20100

DeviceNet (CAN) - Module VCB 20100

PROFIBUS DP - Module VPB 20100

Ethernet - TCP - Modbus Module VET 20100

Ethernet - IP - Module VET 20101