

4 1/2 DIGIT CLINICAL THERMOMETER


1. General Descriptions

SS0407 is a CMOS digital clinical thermometer IC for measuring body temperature in Centigrade(°C) or Fahrenheit(°F) mode by its bonding option. from 32.00°C~42.00°C(90.00°F ~ 108.00°F). It also provides alarm, self-test, auto power off and last time measured temperature functions. The other electronic components are LCD display, thermister, 1.5V battery, ON/OFF switch, buzzer, resistors and capacitors.

2. Features

- ◆ Single-chip CMOS construction
- ◆ Single 1.5V battery operation
- ◆ Bonding option for Centigrade/ Fahrenheit measurement.
- ◆ Measurement range: 32.00°C~42.00°C(90.00°F ~ 108.00°F)
- ◆ Measurement accuracy: $\pm 0.01^{\circ}\text{C}$
- ◆ Resolution: $0.01^{\circ}\text{C}(0.02^{\circ}\text{F})$
- ◆ Auto self-test
- ◆ Alarm warning for fever
- ◆ Highest temperature hold
- ◆ Auto power off after 8 min 40 sec
- ◆ One-key input switch for ON/OFF
- ◆ Displays last time measured temperature

3. Function Block Diagram

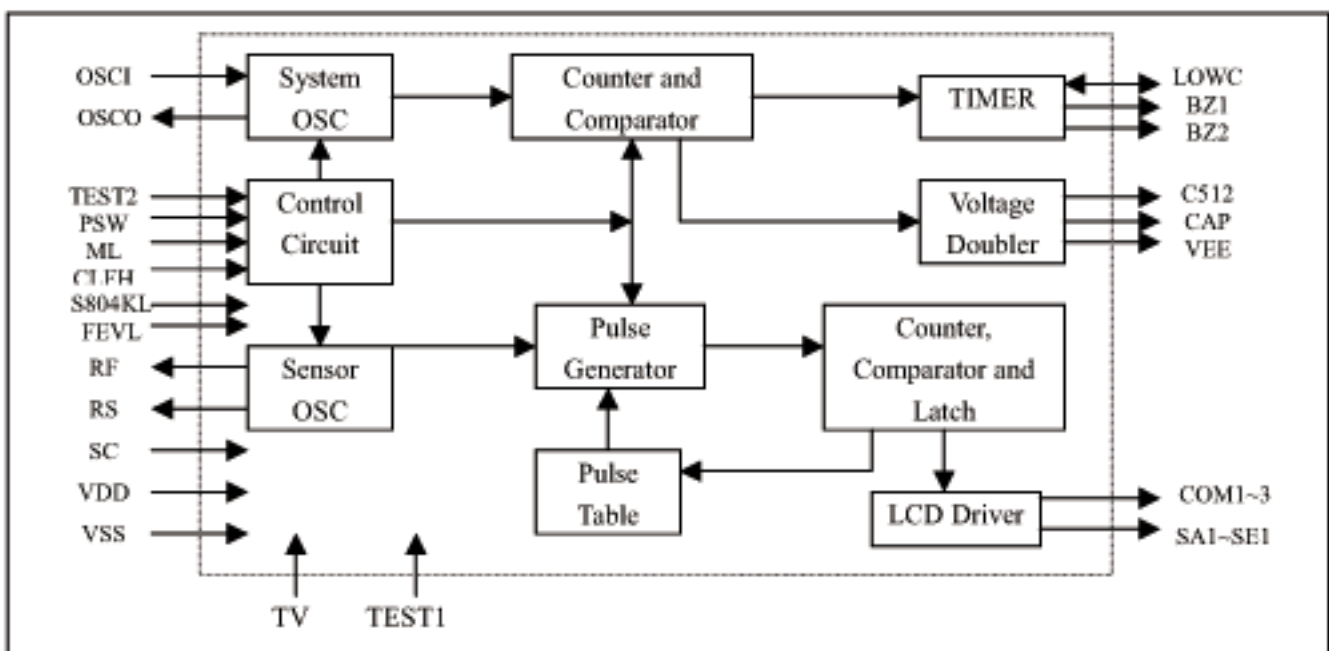

7. Absolute Maximum Ratings

(All voltage referenced to GND)

Item	Symbol	Rating	Unit
Supply Voltage	V_{DD}	0 ~ 2.0	V
Input / Output Voltage	V_I/V_O	GND-0.5 ~ VDD+0.5	V
Operating Temperature	T_{DO}	-20 ~ +75	°C
Storage Temperature	T_{ST}	-55 ~ +125	°C


Note: These are stress ratings only. Stresses exceeding the range specified under "Absolute Maximum Ratings" may cause substantial damage to the device. Functional operation of this device at other conditions beyond those listed in the specification is not implied and prolonged exposure to extreme conditions may affect device reliability.

8. Electrical Characteristics

(All voltage referenced to GND, Ambient temperature=25 °C)

Parameters	Symbol	Condition	Min.	Typ.	Max.	Unit
Operating Voltage	V_{DD}		1.3	1.5	1.65	V
Operating Current	I_{DD}	VDD=1.5V, No load	--	60	100	μA
Stand-by Current	I_{STB}	VDD=1.5V	--	--	1.0	μA
Oscillating Frequency	F_{OSC}	VDD=1.5V $R_{OSC}=820K$ Ω	25.6	32	38.4	KHz
Temperature Measurement Accuracy at Range 35°C~39°C	R°C	--	-0.1	--	0.1	°C
Temperature Measurement Accuracy at Range 95°F~102°F	R°F	--	-0.2	--	0.2	°F

LCD Electrode Pattern

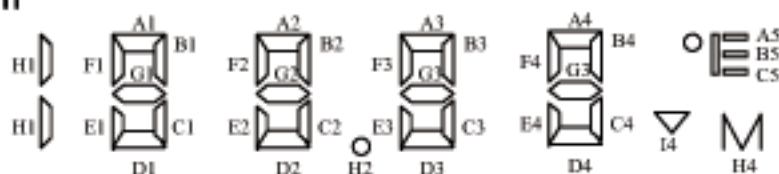

	SA1	SA2	SA3	SB1	SB2	SB3	SC1	SC2	SC3	SD1	SD2	SD3	SE1
COM1	F1	A1	B1	F2	A2	B2	F3	A3	B3	F4	A4	B4	A5
COM2	E1	G1	C1	E2	G2	C2	E3	G3	C3	E4	G4	C4	B5
COM3	H1	D1	--	--	D2	H2	--	D3	--	I4	D4	H4	C5

Note: 1/3 duty, 1/2 bias, (LCD uses 3V)


follows:

BI -----

0.5S 0.5S

- j. It will automatically turn the power off when measurement is over for 8 min 40 sec.
- k. When measurement is over, but if the temperature rises within 8 min 40 sec, the °C(or°F) mark will flash again (repeat from step 2-d), and starts to count 8 min 40 sec again.
- l. When beep sound is on for 4 sec, the temperature is not measured.
- ◆ When power off: the standby current <1μA.
- ◆ The frequency of the buzzer is 4kHz or 8kHz by pin option.
- ◆ Fever alarm is pin option.
- ◆ Bonding option °C or °F
- ◆ Measurement to 0.01 degree in either °C or °F
- ◆ Sensor use 503ET.
- ◆ Reference resistor is the value (sensor in 37.00°C)
- ◆ The low battery and "M" flag cannot display when the temperature shows Hi or Lo.
- ◆ When battery voltage is low, the battery mark "V" flashes at a speed of 1Hz and the measurement may not be accurate. The low voltage detects: 1.35V ±0.05V.
- ◆ During the process of mass production, in order to adjust the reference resistance (RF), let test 2 be floating, the measured temperature will be the actual temperature of the measured environment. It can be up or down, not always the higher one.

6. Flow Chart

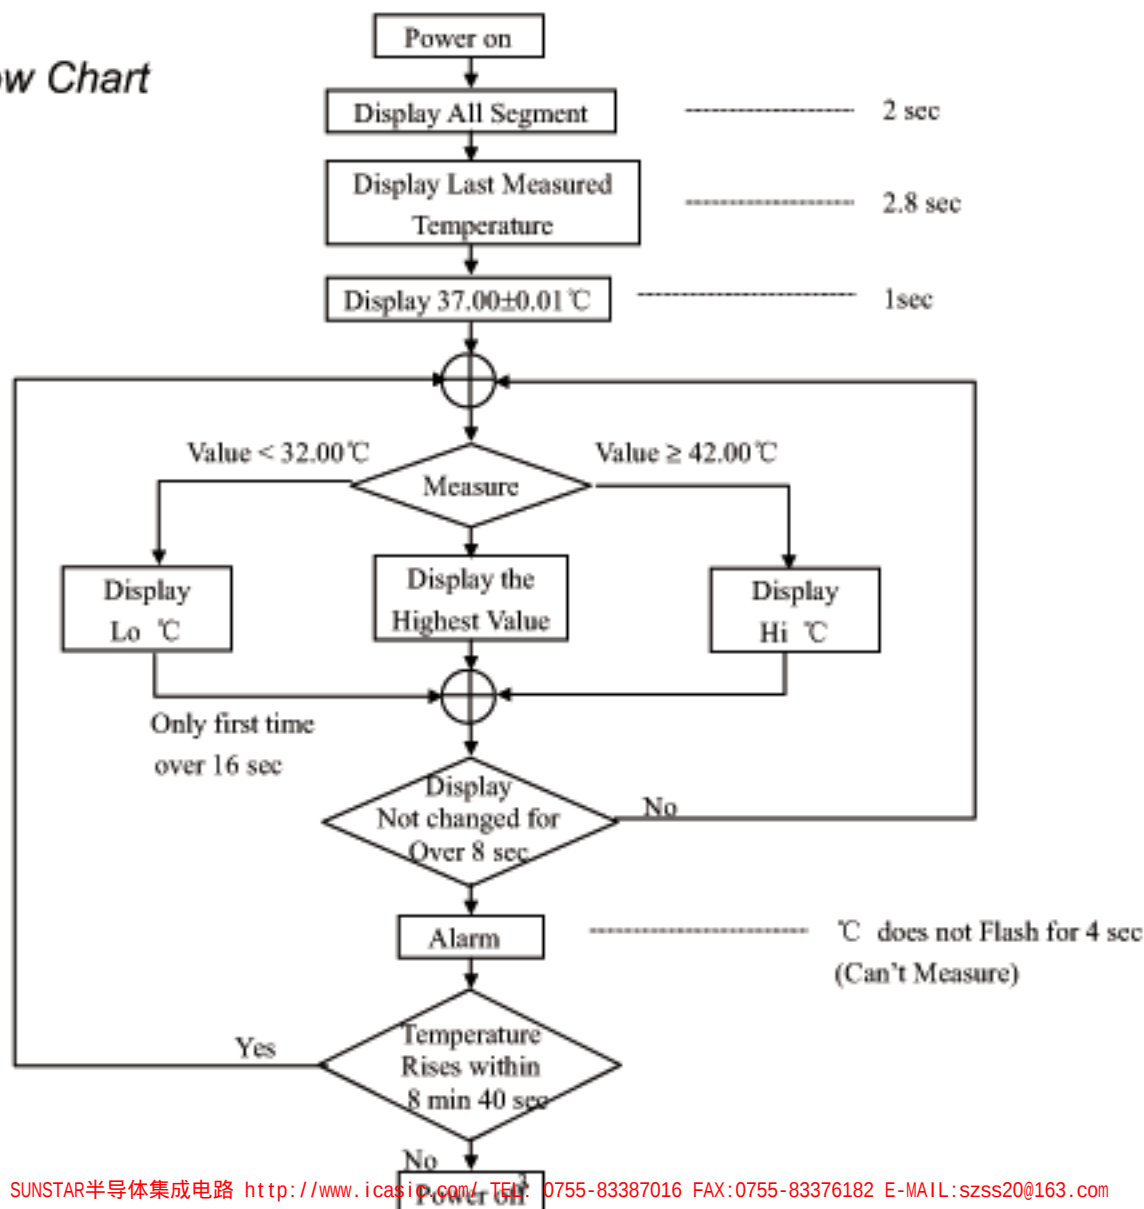

4. Pin Descriptions

Pin	Name	I/O	Function
1~3	SA1~SA3	O	LCD segment drive
4~6	SB1~SB3	O	LCD segment drive
7~9	SC1~SC3	O	LCD segment drive
10~12	SD1~SD3	O	LCD segment drive
13	SE1	O	LCD segment drive
14	VEE	O	Generate negative voltage (-1.5V)
15	CAP	O	For negative voltage, NMOS output
16	C512	O	For negative voltage, inverter output
17	TV	I/O	Test pin for IC
18	TEST1	I	Test pin for IC
19	LOWC	I/O	For the supply voltage detector. Open the pin when not in use.
20	VSS	I	Power supply GND
21	SC	I/O	Common point, NMOS open drain
22	RF	O	Connect reference resistor, PMOS open drain
23	RS	O	Connect sensor resistor, PMOS open drain
24	VDD	I	Positive power supply
25	PSW	I	Pull low input pin, push switch to turn the power on or off
26	TEST2	I	Pull low test pin, for production test, floating LCD displays the real time value, when connected to VDD, LCD displays the highest value.
27	CLFH	I	Floating for °C, connect to VDD for °F
28	ML	I	Connect to VDD for memory function, otherwise floating.
29	FEVL	I	Floating with fever function, otherwise connect to VDD
30	S804KL	I	Floating buzzer is 4kHz, connect to VDD if buzzer is 8kHz
31	OSCI	I	For system oscillator in
32	OSCO	O	For system oscillator out
33	BZ1	O	Buzzer output 1
34	BZ2	O	Buzzer output 2
35~37	COM1~COM3	O	LCD backplane drive, 3-level voltage out

5. Function Descriptions

- ◆ Power sw: push switch to turn the power on or off.
- ◆ When power on: push the switch, then it will generate a "beep" sound for 0.125 sec.
 - a. First displays all the segments on for 2 sec.
 - b. After a., as described above, then shows the last-time measured temperature for 2.8 sec.
 - c. After b., shows the self-test temperature ($37.00 \pm 0.01^{\circ}\text{C}$) or ($98.60 \pm 0.02^{\circ}\text{F}$) for 1 sec. The °C mark will flash at a speed of 1Hz.
 - d. After c., displays the highest measured temperature, then the °C mark will flash at a speed of 1Hz.
 - e. If the temperature is $< 32.00^{\circ}\text{C}$ (or 90.00°F), the display shows Lo °C.
 - f. If the temperature is $\geq 42.00^{\circ}\text{C}$ (or 108.00°F), the display shows Hi °C.
 - g. The display always shows the higher temperature during the temperature measurement.
 - h. If the measured temperature does not change for more than 8 sec, the measurement is over and the °C mark flash stops.
 - i. When measurement is over, if the temperature $> 37.50^{\circ}\text{C}$ (or 99.50°F) the buzzer alarms "beep-beep-beep---beep-beep-beep---" for 4 sec,


BI ----- BI ----- BI ----- -----

 0.125S 0.125S 0.125S 0.125S 0.125S 0.125S 0.375S
 - If the temperature $\leq 37.50^{\circ}\text{C}$ (or 99.50°F), the buzzer alarms " beep-beep-beep-beep-"for 4 sec, as

10. Pad Diagram


NO.	PADNAME	X	Y
1	SA1	-879	-1017
2	SA2	-705	-1017
3	SA3	-533	-1017
4	SB1	-360	-1017
5	SB2	-186	-1017
6	SB3	-13	-1017
7	SC1	160	-1017
8	SC2	332	-1017
9	SC3	506	-1017
10	SD1	679	-1017
11	SD2	852	-1017
12	SD3	1026	-1017
13	SE1	1061	-709
14	VEE	1061	-575
15	CAP	1061	-407
16	C512	1055	-226
17	TV	1061	-39
18	TEST1	1061	102
19	LOWC	1061	243

NO.	PADNAME	X	Y
20	GND	1057	390
21	SC	1035	1013
22	RF	606	1013
23	RS	374	1013
24	VDD	240	1013
25	PSW	4	1013
26	TEST2	-130	1013
27	CLFH	-366	1013
28	ML	-500	1013
29	FEVL	-736	1013
30	S804KL	-870	1013
31	OSCI	-1064	1013
32	OSCO	-1063	398
33	BUZ1	-1063	153
34	BUZ2	-1063	-311
35	COM1	-1063	-577
36	COM2	-1063	-823
37	COM3	-1063	-1017

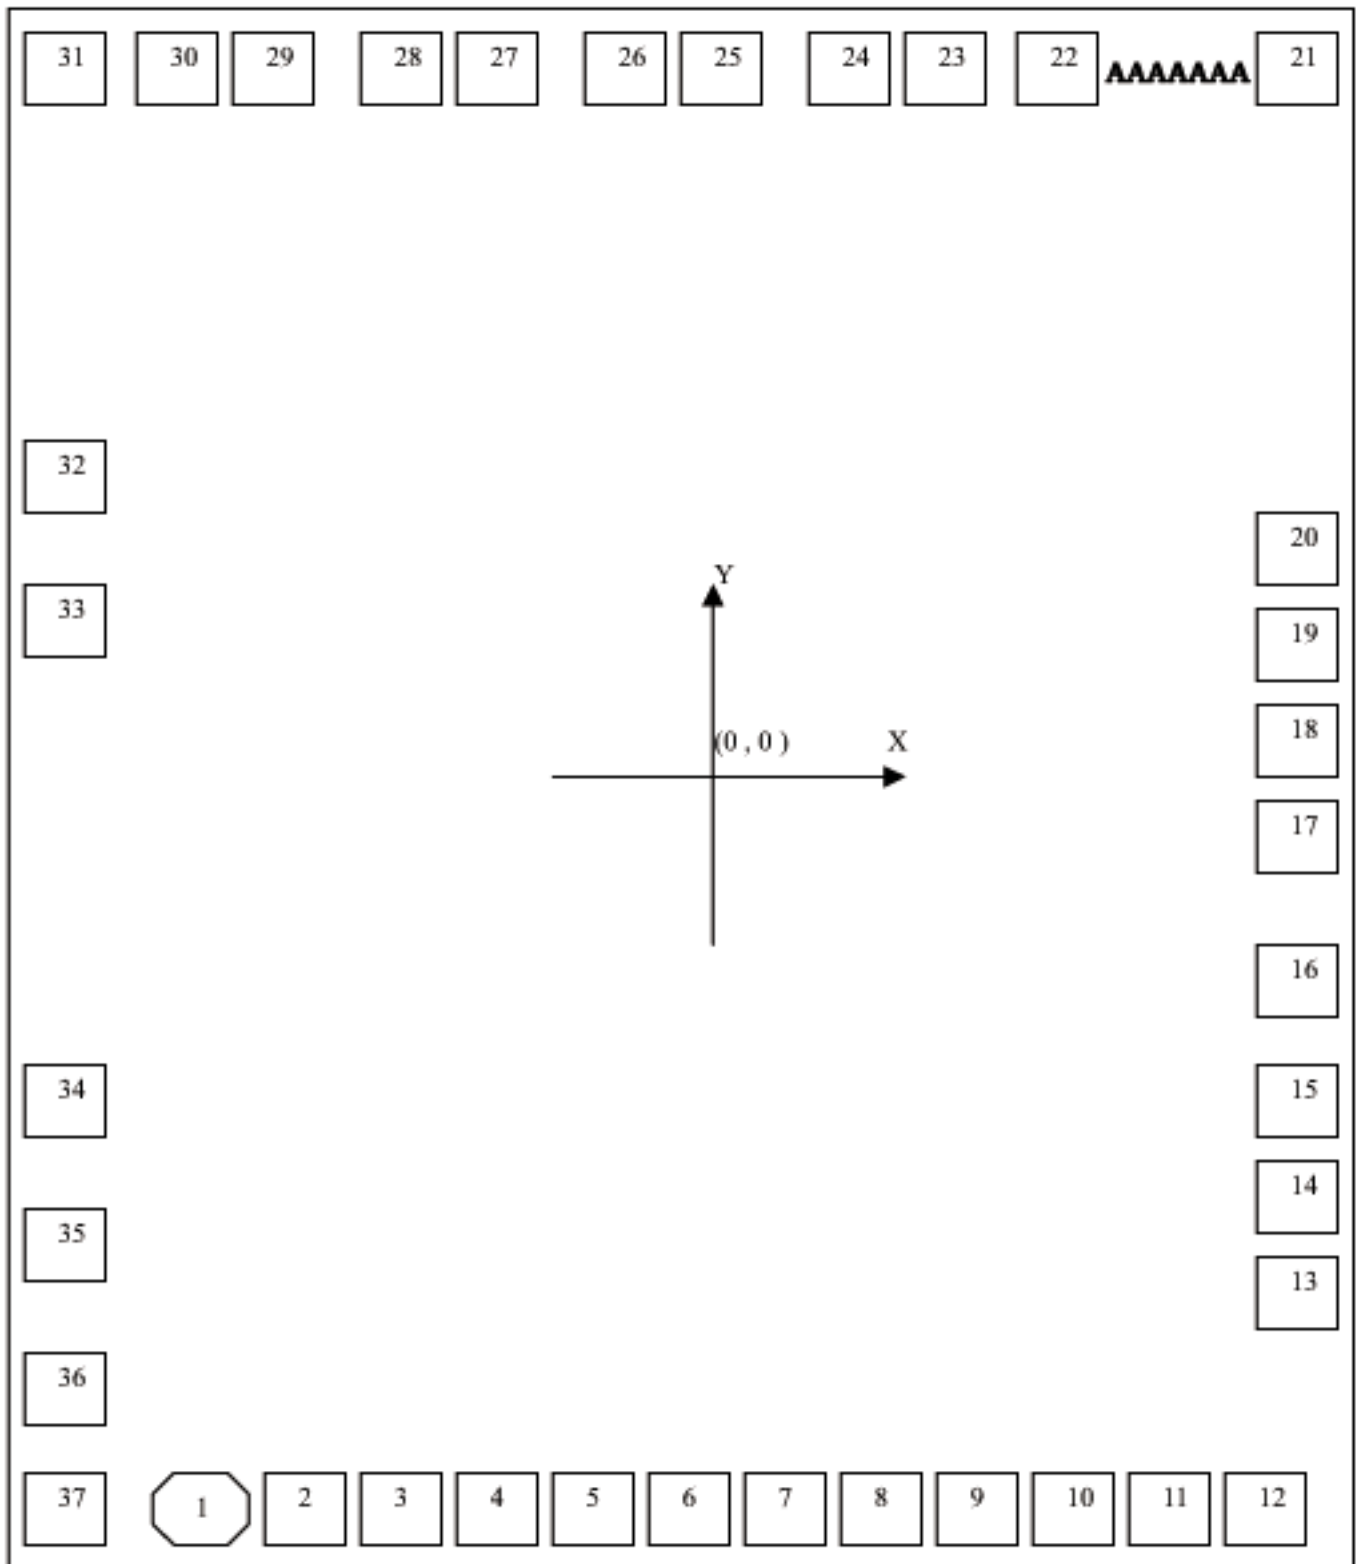

Chip Size: 2300um*2210um Note: The substrate must be connected to VDD.

11. Application Circuit

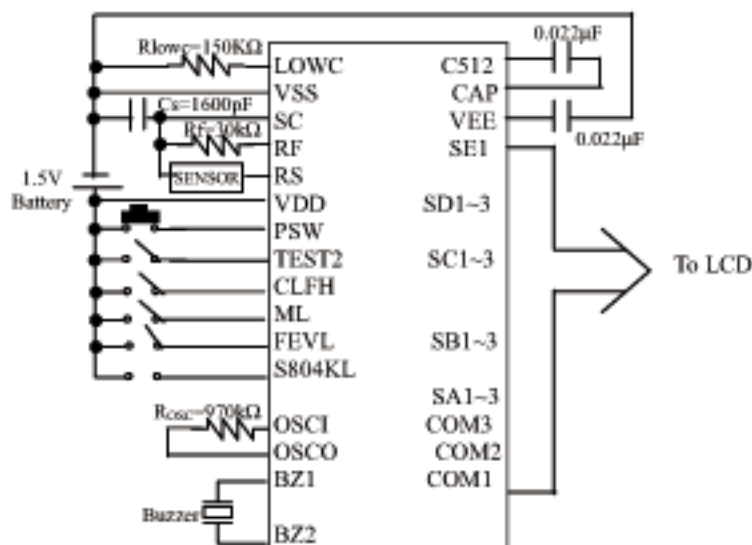

The value of R_{osc} , R_{lowc} , C_512 is allowed the range of $\pm 5\%$.
The Value of R_f is allowed the range of $\pm 1\%$.

Note: Substrate connect to VDD

V_{EE} , CAP, and C512 are externally connected to capacitors for stabilizing V_{EE} ($= -1.5V$).

BZ1 and BZ2 are connected to an external buzzer to generate sounds.

LOWC is connected to an external resistor for adjusting the detector level of a low voltage detector.

Open the pin

when not in use.

OSC1, OSCO are connected to an external resistor, and form an RC oscillator with a built-in capacitor for SYSTEM clock ($\approx 32KHz$).

RS, RF, SC constitute an alternating RC oscillator, which allows one oscillator, namely RS or RF, active at a time.

REF(reference resistor) is a resistor value equal to 503ET, sensor is value in $37.0^\circ C$ or $98.6^\circ F$.

SENSOR is a 503ET thermistor.

NOTICE:

1. The information contained herein could be changed without notice owing to product and /or technical improvements. Please make sure before using the product that the information you are referring to is up-to-date.
2. No responsibility is assumed by us for any consequence resulting from any wrong or improper operation, etc. of the product.

欢迎索取免费详细资料、设计选型指南和光盘、样品；产品繁多未能尽录，欢迎来电查询。

[中国传感器科技信息网：HTTP：//WWW.SENSOR-IC.COM/](http://WWW.SENSOR-IC.COM/)

[工控安防网：HTTP：//WWW.PC-PS.NET/](http://WWW.PC-PS.NET/)

[消费电子专用电路网：HTTP://WWW.SUNSTARE.COM/](http://WWW.SUNSTARE.COM/)

E-MAIL：xjr5@163.com szss20@163.com

MSN：suns8888@hotmail.com

QQ：195847376

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83376549 83376489 83387030 83387016

传真：0755-83376182 83383339 邮编：518033 手机：(0)13902971329

深圳展销部：深圳华强北路赛格电子市场 2583 号 TEL/FAX：
0755-83665529 25059422

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL：010-81159046 82615020 13501189838 FAX：010-82613476

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL：021-28311762 56703037 13701955389 FAX：021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)
西安劳动南路 88 号电子商城二楼 D23 号

TEL：029-81022619 13072977981 FAX:029-88789382

成都：TEL:(0)13717066236

技术支持：0755-83394033 13501568376