



0.1 GHz - 30 GHz

# RF/Microwave Amplifiers

Lucix offers an exceptionally wide range of **standard off-the-shelf** RF/Microwave amplifiers covering 0.01 GHz through 30 GHz, delivered quickly and at very affordable prices. Amplifiers are grouped into three broad classes:

- **Broadband** – octave bandwidths
- **Ultra-Broadband** - multi-octave bandwidth
- **Narrowband** - sub-octave bandwidths

Lucix Amplifiers reflect proven, **reliable thin-film hybrid** construction techniques and are based on well established circuit approaches including distributed, feedback, and balanced type designs. Our products utilize GaAs FET, HBT, and MMIC devices from a select number of suppliers and are lot qualified to minimize performance variation and maximize performance. Lucix Amplifiers are packaged in low-profile aluminum cases with convenient mounting holes and field removable SMA connectors.

Lucix is **ready to support your custom requirements** for single-function amplifier modules, multi-function integrated microwave assemblies, MIL-Spec screening, and qualification testing.

### Low Added Phase Noise

Our amplifiers exhibit exceptionally low added phase noise; **as low as -150 dBc at 1.0 kHz offset.**

### Limiting Amplifiers

Lucix offers an optional Output Power Limiting feature on all of its amplifier products, Narrowband or Broadband. Our Limiting Amplifiers exhibit **excellent output power flatness and very low harmonics.**

There are a number of popular options which we can be added to the basic amplifier requirement. This is only a sample of Lucix capabilities – give us a call and let's discuss your needs.

## Typical Options

- **Temperature Compensation**  
full military temperature range or as specified
- **Environmental Screening** per MIL-STD-883 or as specified
- **Hermetic Packaging**, laser welded housings, fine/gross seal testing
- **I/O Power Protection** circuitry
- **Built-In-Test (BITE)** circuitry and added Sample Ports
- **I/O digital PIN diode** RF Path Switching Networks
- **Variable Output Level Attenuation**
- **Power Limiting**

## Table of Contents

Ultra-Broadband Amplifiers		Broadband Amplifiers		Narrowband Amplifiers	
Frequency	Page #	Frequency	Page #	Frequency	Page #
0.5 - 3.0 GHz	3	2.0 - 4.0 GHz	9	1.2 - 1.6 GHz	20
0.1 - 4.0 GHz	3	2.0 - 6.0 GHz	10	2.7 - 2.9 GHz	21
0.01 - 6.0 GHz	4	4.0 - 8.0 GHz	11	5.4 - 5.9 GHz	22
0.01 - 10 GHz	5	4.0 - 10.0 GHz	12	9.5 - 10.5 GHz	23
0.5 - 18.0 GHz	6	6.0 - 12.0 GHz	13	14.0 - 14.5 GHz	24
2.0 - 18.0 GHz	7	8.0 - 12.0 GHz	14	13.75 - 15.4 GHz	25
0.1 - 20.0 GHz	8	6.0 - 18.0 GHz	15	17.7 - 18.3 GHz	26
		8.0 - 18.0 GHz	16		
		12.0 - 18.0 GHz	17		
		18.0 - 26.5 GHz	18		
		15.0 - 30.0 GHz	19		

**0.5 -3.0 GHz**

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S005030L1501	0.5 -3.0	15	25	15	0.50	1.3	2.0:1	60	SK2
S005030L3001	0.5 -3.0	15	25	30	0.75	1.3	2.0:1	100	SK3
S005030L4501	0.5 -3.0	15	25	45	1.00	1.3	2.0:1	130	SK4
S005030L1502	0.5 -3.0	20	30	15	0.50	1.5	2.0:1	100	SK2
S005030L3002	0.5 -3.0	20	30	30	0.75	1.5	2.0:1	150	SK3
S005030L4502	0.5 -3.0	20	30	45	1.00	1.5	2.0:1	200	SK4
S005030L1201	0.5 -3.0	23	33	12	0.50	3.0	2.0:1	120	SK2
S005030L2701	0.5 -3.0	23	33	27	0.75	1.5	2.0:1	180	SK3
S005030L4201	0.5 -3.0	23	33	42	1.00	1.5	2.0:1	240	SK4

**0.1 -4.0 GHz**

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S001040L1401	0.1 -4.0	13	23	14	0.50	1.5*	2.0:1	50	SK2
S001040L2801	0.1 -4.0	13	23	28	0.75	1.6*	2.0:1	90	SK3
S001040L4201	0.1 -4.0	13	23	42	1.00	1.6*	2.0:1	130	SK4
S001040L1501	0.1 -4.0	20	30	15	0.50	2.0*	2.0:1	110	SK2
S001040L3001	0.1 -4.0	20	30	30	0.75	1.5*	2.0:1	160	SK3
S001040L4501	0.1 -4.0	20	30	45	1.00	1.5*	2.0:1	250	SK4
S001040M1201	0.1 -4.0	23	33	12	0.50	3.0*	2.0:1	120	SK2
S001040M2701	0.1 -4.0	23	33	27	0.75	1.5*	2.0:1	180	SK3
S001040M4201	0.1 -4.0	23	33	42	1.00	1.5*	2.0:1	240	SK4

Operating Temperature 0 to 70°C

Specified Performance guaranteed @ 25 °C

Military and Space Specifications and Screening Available

\* Noise Figure Increases Below 250MHz

**0.01 -6.0 GHz**

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S10M060L2001	0.01 - 6.0	10	20	20	1.00	2.5*	1.8:1	100	LK3
S10M060L3001	0.01 - 6.0	10	20	30	1.25	2.5*	1.8:1	150	LK4
S10M060L4001	0.01 - 6.0	10	20	40	1.50	2.5*	1.8:1	200	LK5
S10M060L1801	0.01 - 6.0	13	23	18	1.00	3.0*	1.8:1	130	LK3
S10M060L2801	0.01 - 6.0	13	23	28	1.25	2.5*	1.8:1	180	LK4
S10M060L3801	0.01 - 6.0	13	23	38	1.50	2.5*	1.8:1	230	LK5
S10M060L1802	0.01 - 6.0	17	27	18	1.00	3.5*	1.8:1	160	LK3
S10M060L2802	0.01 - 6.0	17	27	28	1.25	2.5*	1.8:1	210	LK4
S10M060L3802	0.01 - 6.0	17	27	38	1.50	2.5*	1.8:1	260	LK5
S10M060L1803	0.01 - 6.0	20	30	18	1.00	4.0*	1.8:1	180	LK3
S10M060L2803	0.01 - 6.0	20	30	28	1.25	2.8*	1.8:1	230	LK4
S10M060L3803	0.01 - 6.0	20	30	38	1.50	2.5*	1.8:1	280	LK5
S10M060M1601	0.01 - 6.0	23**	33	16	1.00	5.0*	2.0:1	210	LK3
S10M060M2601	0.01 - 6.0	23**	33	26	1.25	3.5*	2.0:1	260	LK4
S10M060M3601	0.01 - 6.0	23**	33	36	1.50	3.0*	2.0:1	310	LK5

Operating Temperature 0 to 70°C

Specified Performance guaranteed @ 25 °C

Military and Space Specifications and Screening Available

\* Noise figure increases below 250 MHz

\*\* P1dB rated above 100 MHz

0.01 -10.0 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S10M100L1801	0.01 - 10.0	10	20	18	1.00	3.0*	2.0:1	100	LK3
S10M100L2801	0.01 - 10.0	10	20	28	1.25	3.0*	2.0:1	150	LK4
S10M100L3801	0.01 - 10.0	10	20	38	1.50	3.0*	2.0:1	200	LK5
S10M100L1802	0.01 - 10.0	13	23	18	1.00	3.5*	2.0:1	130	LK3
S10M100L2802	0.01 - 10.0	13	23	28	1.25	2.5*	2.0:1	180	LK4
S10M100L3802	0.01 - 10.0	13	23	38	1.50	2.5*	2.0:1	230	LK5
S10M100L1803	0.01 - 10.0	17	27	18	1.00	3.5*	2.0:1	160	LK3
S10M100L2803	0.01 - 10.0	17	27	28	1.25	2.5*	2.0:1	210	LK4
S10M100L3803	0.01 - 10.0	17	27	38	1.50	2.5*	2.0:1	260	LK5
S10M100L1804	0.01 - 10.0	20	30	18	1.00	4.0*	2.0:1	180	LK3
S10M100L2804	0.01 - 10.0	20	30	28	1.25	2.8*	2.0:1	230	LK4
S10M100L3804	0.01 - 10.0	20	30	38	1.50	2.5*	2.0:1	280	LK5
S10M060M1601	0.01 - 10.0	23**	33	16	1.00	5.0*	2.0:1	300	LK3
S10M060M2601	0.01 - 10.0	23**	33	26	1.25	3.5*	2.0:1	400	LK4
S10M060M3601	0.01 - 10.0	23**	33	36	1.50	3.0*	2.0:1	450	LK5

Operating Temperature 0 to 70°C  
 Specified Performance guaranteed @ 25 °C  
 Military and Space Specifications and Screening Available  
 \* Noise figure increases below 250 MHz  
 \*\* P1dB rated above 100 MHz

0.5 -18.0 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S005180L1601	0.5 - 18.0	8	16	16	1.00	3.0	2.0:1	100	LK3
S005180L2401	0.5 - 18.0	8	16	24	1.25	3.0	2.0:1	150	LK4
S005180L3201	0.5 - 18.0	8	16	32	1.50	3.0	2.0:1	200	LK5
S005180L1602	0.5 - 18.0	10	18	16	1.00	3.3	2.0:1	110	LK3
S005180L2402	0.5 - 18.0	10	18	24	1.25	3.0	2.0:1	160	LK4
S005180L3202	0.5 - 18.0	10	18	32	1.50	3.0	2.0:1	210	LK5
S005180L1603	0.5 - 18.0	13	21	16	1.00	3.3	2.0:1	120	LK3
S005180L2403	0.5 - 18.0	13	21	24	1.25	3.0	2.0:1	170	LK4
S005180L3203	0.5 - 18.0	13	21	32	1.50	3.0	2.0:1	220	LK5
S005180L1604	0.5 - 18.0	17	25	16	1.00	3.5	2.0:1	150	LK3
S005180L2404	0.5 - 18.0	17	25	24	1.25	3.0	2.0:1	200	LK4
S005180L3204	0.5 - 18.0	17	25	32	1.50	2.8	2.0:1	250	LK5
S005180L1605	0.5 - 18.0	20	28	16	1.00	4.0	2.0:1	180	LK3
S005180L2405	0.5 - 18.0	20	28	24	1.25	3.5	2.0:1	230	LK4
S005180L3205	0.5 - 18.0	20	28	32	1.50	2.8	2.0:1	280	LK5
S005180M1601	0.5 - 18.0	22	30	16	1.00	5.0	2.0:1	260	LK3
S005180M2401	0.5 - 18.0	22	30	24	1.25	3.5	2.0:1	310	LK4
S005180M3201	0.5 - 18.0	22	30	32	1.50	3.0	2.0:1	360	LK5

Operating Temperature 0 to 70°C  
 Specified Performance guaranteed @ 25 °C  
 Military and Space Specifications and Screening Available

## 2.0 -18.0 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S020180L1601	2.0 - 18.0	8	16	16	1.00	2.8	2.0:1	100	LK3
S020180L2401	2.0 - 18.0	8	16	24	1.25	2.8	2.0:1	150	LK4
S020180L3201	2.0 - 18.0	8	16	32	1.50	2.8	2.0:1	200	LK5
S020180L1602	2.0 - 18.0	10	18	16	1.00	2.8	2.0:1	110	LK3
S020180L2402	2.0 - 18.0	10	18	24	1.25	2.8	2.0:1	160	LK4
S020180L3202	2.0 - 18.0	10	18	32	1.50	2.8	2.0:1	210	LK5
S020180L1603	2.0 - 18.0	13	21	16	1.00	3.0	2.0:1	120	LK3
S020180L2403	2.0 - 18.0	13	21	24	1.25	2.8	2.0:1	170	LK4
S020180L3203	2.0 - 18.0	13	21	32	1.50	2.8	2.0:1	220	LK5
S020180L1604	2.0 - 18.0	17	25	16	1.00	3.5	2.0:1	150	LK3
S020180L2404	2.0 - 18.0	17	25	24	1.25	3.0	2.0:1	200	LK4
S020180L3204	2.0 - 18.0	17	25	32	1.50	2.8	2.0:1	250	LK5
S020180L1605	2.0 - 18.0	20	28	16	1.00	4.0	2.0:1	180	LK3
S020180L2405	2.0 - 18.0	20	28	24	1.25	3.5	2.0:1	230	LK4
S020180L3205	2.0 - 18.0	20	28	32	1.50	2.8	2.0:1	280	LK5
S020180M1601	2.0 - 18.0	22	30	16	1.00	5.0	2.0:1	260	LK3
S020180M2401	2.0 - 18.0	22	30	24	1.25	3.5	2.0:1	310	LK4
S020180M3201	2.0 - 18.0	22	30	32	1.50	3.0	2.0:1	360	LK5

Operating Temperature 0 to 70°C  
 Specified Performance guaranteed @ 25 °C  
 Military and Space Specifications and Screening Available

0.1 -20.0 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S001200L1601	0.1 - 20.0	8	16	16	1.00	3.0*	2.2:1	100	LK3
S001200L2401	0.1 - 20.0	8	16	24	1.25	3.0*	2.2:1	150	LK4
S001200L3201	0.1 - 20.0	8	16	32	1.50	3.0*	2.2:1	200	LK5
S001200L1602	0.1 - 20.0	10	18	16	1.00	3.3*	2.2:1	110	LK3
S001200L2402	0.1 - 20.0	10	18	24	1.25	3.0*	2.2:1	160	LK4
S001200L3202	0.1 - 20.0	10	18	32	1.50	3.0*	2.2:1	210	LK5
S001200L1603	0.1 - 20.0	13	21	16	1.00	3.3*	2.2:1	120	LK3
S001200L2403	0.1 - 20.0	13	21	24	1.25	3.0*	2.2:1	170	LK4
S001200L3203	0.1 - 20.0	13	21	32	1.50	3.0*	2.2:1	220	LK5
S001200L1604	0.1 - 20.0	17	25	16	1.00	3.5*	2.2:1	180	LK3
S001200L2404	0.1 - 20.0	17	25	24	1.25	3.2*	2.2:1	230	LK4
S001200L3204	0.1 - 20.0	17	25	32	1.50	3.0*	2.2:1	280	LK5
S001200L1605	0.1 - 20.0	20	28	16	1.00	4.0*	2.2:1	210	LK3
S001200L2405	0.1 - 20.0	20	28	24	1.25	3.5*	2.2:1	260	LK4
S001200L3205	0.1 - 20.0	20	28	32	1.50	3.0*	2.2:1	310	LK5

Operating Temperature 0 to 70°C

Specified Performance guaranteed @ 25 °C

Military and Space Specifications and Screening Available

\* Noise figure increases below 250 MHz

2.0 - 4.0 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S020040L1601	2.0 - 4.0	10	20	16	0.50	1.5	2.0:1	50	SK2
S020040L3201	2.0 - 4.0	10	20	32	0.75	1.5	2.0:1	90	SK3
S020040L4801	2.0 - 4.0	10	20	48	1.00	1.5	2.0:1	130	SK4
S020040L1602	2.0 - 4.0	14	24	16	0.50	2.0	2.0:1	70	SK2
S020040L3202	2.0 - 4.0	14	24	32	0.75	1.5	2.0:1	110	SK3
S020040L4802	2.0 - 4.0	14	24	48	1.00	1.5	2.0:1	150	SK4
S020040L1603	2.0 - 4.0	17	27	16	0.50	2.5	2.0:1	90	SK2
S020040L3203	2.0 - 4.0	17	27	32	0.75	2.0	2.0:1	130	SK3
S020040L4803	2.0 - 4.0	17	27	48	1.00	1.5	2.0:1	170	SK4
S020040L1604	2.0 - 4.0	20	30	16	0.50	3.3	2.0:1	120	SK2
S020040L3204	2.0 - 4.0	20	30	32	0.75	3.0	2.0:1	160	SK3
S020040L4804	2.0 - 4.0	20	30	48	1.00	2.5	2.0:1	200	SK4
S020040M1501	2.0 - 4.0	24	34	15	0.50	3.5	2.0:1	150	SK2
S020040M3101	2.0 - 4.0	24	34	31	0.75	3.0	2.0:1	200	SK3
S020040M4601	2.0 - 4.0	24	34	46	1.00	2.5	2.0:1	250	SK4
S020040M1502	2.0 - 4.0	27	37	15	0.50	4.0	2.0:1	300	SK2
S020040M3102	2.0 - 4.0	27	37	31	1.00	3.5	2.0:1	380	SK3
S020040M4602	2.0 - 4.0	27	37	46	1.25	2.5	2.0:1	430	SK4
S020040P1201	2.0 - 4.0	30	40	12	0.50	4.5	2.0:1	550	SK2
S020040P2801	2.0 - 4.0	30	40	28	1.00	4.0	2.0:1	700	SK3
S020040P4301	2.0 - 4.0	30	40	43	1.25	2.8	2.0:1	750	SK4

Operating Temperature 0 to 70°C  
 Specified Performance guaranteed @ 25 °C  
 Military and Space Specifications and Screening Available



2.0 - 6.0 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S020060L1401	2.0 - 6.0	10	20	14	0.50	2.5	2.0:1	50	SK2
S020060L2801	2.0 - 6.0	10	20	28	0.75	2.5	2.0:1	90	SK3
S020060L4201	2.0 - 6.0	10	20	42	1.00	2.5	2.0:1	130	SK4
S020060L1402	2.0 - 6.0	14	24	14	0.50	2.5	2.0:1	70	SK2
S020060L2802	2.0 - 6.0	14	24	28	0.75	2.5	2.0:1	110	SK3
S020060L4202	2.0 - 6.0	14	24	42	1.00	2.5	2.0:1	150	SK4
S020060L1403	2.0 - 6.0	17	27	14	0.50	3.0	2.0:1	90	SK2
S020060L2803	2.0 - 6.0	17	27	28	0.75	2.5	2.0:1	130	SK3
S020060L4203	2.0 - 6.0	17	27	42	1.00	2.5	2.0:1	170	SK4
S020060L1301	2.0 - 6.0	20	30	13	0.50	3.5	2.0:1	120	SK2
S020060L2701	2.0 - 6.0	20	30	27	0.75	2.8	2.0:1	160	SK3
S020060L4101	2.0 - 6.0	20	30	41	1.00	2.5	2.0:1	200	SK4
S020060M1301	2.0 - 6.0	24	34	13	0.50	4.0	2.0:1	150	SK2
S020060M2701	2.0 - 6.0	24	34	27	0.75	2.8	2.0:1	200	SK3
S020060M4101	2.0 - 6.0	24	34	41	1.00	2.5	2.0:1	250	SK4
S020060M1201	2.0 - 6.0	27	37	12	0.50	5.5	2.0:1	370	SK2
S020060M2501	2.0 - 6.0	27	37	25	1.00	4.5	2.0:1	500	SK3
S020060M3901	2.0 - 6.0	27	37	39	1.25	3.0	2.0:1	550	SK4
S020060P1001	2.0 - 6.0	30	40	10	0.50	7.0	2.0:1	550	SK2
S020060P2301	2.0 - 6.0	30	40	23	1.00	6.0	2.0:1	700	SK3
S020060P3701	2.0 - 6.0	30	40	37	1.25	4.0	2.0:1	860	SK5

Operating Temperature 0 to 70°C  
 Specified Performance guaranteed @ 25 °C  
 Military and Space Specifications and Screening Available

4.0 -8.0 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S040080L1401	4.0 - 8.0	10	20	14	0.50	1.8	2.0:1	50	SK2
S040080L2801	4.0 - 8.0	10	20	28	0.75	1.8	2.0:1	90	SK3
S040080L4201	4.0 - 8.0	10	20	42	1.00	1.8	2.0:1	130	SK4
S040080L1402	4.0 - 8.0	14	24	14	0.50	2.0	2.0:1	70	SK2
S040080L2802	4.0 - 8.0	14	24	28	0.75	1.8	2.0:1	110	SK3
S040080L4202	4.0 - 8.0	14	24	42	1.00	1.8	2.0:1	150	SK4
S040080L1403	4.0 - 8.0	17	27	14	0.50	2.5	2.0:1	90	SK2
S040080L2803	4.0 - 8.0	17	27	28	0.75	2.0	2.0:1	130	SK3
S040080L4203	4.0 - 8.0	17	27	42	1.00	1.8	2.0:1	170	SK4
S040080L1404	4.0 - 8.0	20	30	14	0.50	3.0	2.0:1	120	SK2
S040080L2804	4.0 - 8.0	20	30	28	0.75	2.0	2.0:1	160	SK3
S040080L4204	4.0 - 8.0	20	30	42	1.00	1.8	2.0:1	200	SK4
S040080M1401	4.0 - 8.0	24	34	14	0.50	3.2	2.0:1	150	SK2
S040080M2801	4.0 - 8.0	24	34	28	0.75	2.2	2.0:1	200	SK3
S040080M4201	4.0 - 8.0	24	34	42	1.00	1.8	2.0:1	250	SK4
S040080M1201	4.0 - 8.0	27	37	12	0.50	4.0	2.0:1	370	SK2
S040080M2601	4.0 - 8.0	27	37	26	1.00	3.0	2.0:1	500	SK3
S040080M4001	4.0 - 8.0	27	37	40	1.25	2.0	2.0:1	550	SK4
S040080P0801	4.0 - 8.0	30	40	8	0.50	5.5	2.0:1	550	SK2
S040080P2001	4.0 - 8.0	30	40	20	1.00	3.5	2.0:1	700	SK3
S040080P3401	4.0 - 8.0	30	40	34	1.25	2.0	2.0:1	800	SK5

Operating Temperature 0 to 70°C  
 Specified Performance guaranteed @ 25 °C  
 Military and Space Specifications and Screening Available

**4.0 -10.0 GHz**

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. ( $\pm$ dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S040100L1201	4.0 - 10.0	10	20	12	0.50	2.0	2.0:1	50	SK2
S040100L2401	4.0 - 10.0	10	20	24	0.75	2.3	2.0:1	90	SK3
S040100L3601	4.0 - 10.0	10	20	36	1.00	2.3	2.0:1	130	SK4
S040100L1202	4.0 - 10.0	14	24	12	0.50	2.5	2.0:1	70	SK2
S040100L2402	4.0 - 10.0	14	24	24	0.75	2.5	2.0:1	110	SK3
S040100L3602	4.0 - 10.0	14	24	36	1.00	2.5	2.0:1	150	SK4
S040100L1203	4.0 - 10.0	17	27	12	0.50	3.0	2.0:1	90	SK2
S040100L2403	4.0 - 10.0	17	27	24	0.75	2.5	2.0:1	130	SK3
S040100L3603	4.0 - 10.0	17	27	36	1.00	2.5	2.0:1	170	SK4
S040100L1204	4.0 - 10.0	20	30	12	0.50	3.5	2.0:1	120	SK2
S040100L2404	4.0 - 10.0	20	30	24	0.75	2.8	2.0:1	160	SK3
S040100L3604	4.0 - 10.0	20	30	36	1.00	2.5	2.0:1	200	SK4
S040100M1201	4.0 - 10.0	24	34	12	0.50	4.5	2.0:1	150	SK2
S040100M2401	4.0 - 10.0	24	34	24	0.75	3.0	2.0:1	200	SK3
S040100M3601	4.0 - 10.0	24	34	36	1.00	2.5	2.0:1	250	SK4
S040100M1001	4.0 - 10.0	27	37	10	0.50	5.5	2.0:1	370	SK2
S040100M2201	4.0 - 10.0	27	37	22	1.00	4.5	2.0:1	500	SK3
S040100M3401	4.0 - 10.0	27	37	34	1.25	3.0	2.0:1	550	SK4
S040100P0801	4.0 - 10.0	30	40	8	0.50	7.0	2.0:1	550	SK2
S040100P2001	4.0 - 10.0	30	40	20	1.00	6.0	2.0:1	700	SK3
S040100P3201	4.0 - 10.0	30	40	32	1.25	4.0	2.0:1	800	SK5

Operating Temperature 0 to 70°C

Specified Performance guaranteed @ 25 °C

Military and Space Specifications and Screening Available

6.0 - 12.0 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S060120L1201	6.0 - 12.0	10	20	12	0.50	2.0	2.0:1	50	SK2
S060120L2301	6.0 - 12.0	10	20	23	0.50	2.0	2.0:1	90	SK3
S060120L3401	6.0 - 12.0	10	20	34	0.75	2.0	2.0:1	130	SK4
S060120L4501	6.0 - 12.0	10	20	45	1.00	2.0	2.0:1	170	SK5
S060120L1202	6.0 - 12.0	14	24	12	0.50	2.3	2.0:1	70	SK2
S060120L2302	6.0 - 12.0	14	24	23	0.50	2.2	2.0:1	110	SK3
S060120L3402	6.0 - 12.0	14	24	34	0.75	2.2	2.0:1	150	SK4
S060120L4502	6.0 - 12.0	14	24	45	1.00	2.2	2.0:1	190	SK5
S060120L1203	6.0 - 12.0	17	27	12	0.50	3.5	2.0:1	90	SK2
S060120L2303	6.0 - 12.0	17	27	23	0.50	2.5	2.0:1	130	SK3
S060120L3403	6.0 - 12.0	17	27	34	0.75	2.5	2.0:1	170	SK4
S060120L4503	6.0 - 12.0	17	27	45	1.00	2.5	2.0:1	210	SK5
S060120L1204	6.0 - 12.0	20	30	12	0.50	4.0	2.0:1	120	SK2
S060120L2304	6.0 - 12.0	20	30	23	0.50	2.5	2.0:1	160	SK3
S060120L3404	6.0 - 12.0	20	30	34	0.75	2.5	2.0:1	200	SK4
S060120L4504	6.0 - 12.0	20	30	45	1.00	2.5	2.0:1	240	SK5
S060120M1101	6.0 - 12.0	24	34	11	0.50	4.0	2.0:1	150	SK2
S060120M2201	6.0 - 12.0	24	34	22	0.50	3.0	2.0:1	200	SK3
S060120M3301	6.0 - 12.0	24	34	33	0.75	2.8	2.0:1	250	SK4
S060120M4401	6.0 - 12.0	24	34	44	1.00	2.8	2.0:1	300	SK5
S060120M1001	6.0 - 12.0	27	37	10	0.50	5.0	2.0:1	370	SK2
S060120M2101	6.0 - 12.0	27	37	21	0.75	4.0	2.0:1	500	SK3
S060120M3201	6.0 - 12.0	27	37	32	1.00	3.0	2.0:1	550	SK4
S060120M4301	6.0 - 12.0	27	37	43	1.25	2.8	2.0:1	600	SK5
S060120P1601	6.0 - 12.0	30	40	16	0.75	6.0	2.0:1	650	SK4
S060120P2601	6.0 - 12.0	30	40	26	1.00	5.0	2.0:1	780	SK5
S060120P3601	6.0 - 12.0	30	40	36	1.25	4.0	2.0:1	860	SK6
S060120P4701	6.0 - 12.0	30	40	47	1.50	2.8	2.0:1	950	SK7

Operating Temperature 0 to 70°C  
 Specified Performance guaranteed @ 25 °C  
 Military and Space Specifications and Screening Available

8.0 - 12.0 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S080120L1201	8.0 - 12.0	10	20	12	0.50	2.0	1.8:1	50	SK2
S080120L2301	8.0 - 12.0	10	20	23	0.50	2.0	1.8:1	90	SK3
S080120L3401	8.0 - 12.0	10	20	34	0.75	2.0	1.8:1	130	SK4
S080120L4501	8.0 - 12.0	10	20	45	1.00	2.0	1.8:1	170	SK5
S080120L1202	8.0 - 12.0	14	24	12	0.50	2.3	1.8:1	70	SK2
S080120L2302	8.0 - 12.0	14	24	23	0.50	2.2	1.8:1	110	SK3
S080120L3402	8.0 - 12.0	14	24	34	0.75	2.2	1.8:1	150	SK4
S080120L4502	8.0 - 12.0	14	24	45	1.00	2.2	1.8:1	190	SK5
S080120L1203	8.0 - 12.0	17	27	12	0.50	3.5	1.8:1	90	SK2
S080120L2303	8.0 - 12.0	17	27	23	0.50	2.5	1.8:1	130	SK3
S080120L3403	8.0 - 12.0	17	27	34	0.75	2.5	1.8:1	170	SK4
S080120L4503	8.0 - 12.0	17	27	45	1.00	2.5	1.8:1	210	SK5
S080120L1204	8.0 - 12.0	20	30	12	0.50	4.0	1.8:1	120	SK2
S080120L2304	8.0 - 12.0	20	30	23	0.50	2.5	1.8:1	160	SK3
S080120L3404	8.0 - 12.0	20	30	34	0.75	2.5	1.8:1	200	SK4
S080120L4504	8.0 - 12.0	20	30	45	1.00	2.5	1.8:1	240	SK5
S080120M1101	8.0 - 12.0	24	34	11	0.50	4.0	1.8:1	150	SK2
S080120M2201	8.0 - 12.0	24	34	22	0.50	3.0	1.8:1	200	SK3
S080120M3301	8.0 - 12.0	24	34	33	0.75	2.8	1.8:1	250	SK4
S080120M4401	8.0 - 12.0	24	34	44	1.00	2.8	1.8:1	300	SK5
S080120M1001	8.0 - 12.0	27	37	10	0.50	5.0	1.8:1	370	SK2
S080120M2101	8.0 - 12.0	27	37	21	0.75	4.0	1.8:1	500	SK3
S080120M3201	8.0 - 12.0	27	37	32	1.00	3.0	1.8:1	550	SK4
S080120M4301	8.0 - 12.0	27	37	43	1.25	2.8	1.8:1	600	SK5
S080120P1601	8.0 - 12.0	30	40	16	0.75	6.0	1.8:1	650	SK4
S080120P2601	8.0 - 12.0	30	40	26	1.00	5.0	1.8:1	780	SK5
S080120P3601	8.0 - 12.0	30	40	36	1.25	4.0	1.8:1	860	SK6
S080120P4701	8.0 - 12.0	30	40	47	1.50	2.8	1.8:1	950	SK7

Operating Temperature 0 to 70°C  
 Specified Performance guaranteed @ 25 °C  
 Military and Space Specifications and Screening Available

6.0 - 18.0 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S060180L1001	6.0 - 18.0	10	20	10	0.50	2.3	2.0:1	50	SK2
S060180L1801	6.0 - 18.0	10	20	18	0.50	2.5	2.0:1	90	SK3
S060180L2601	6.0 - 18.0	10	20	26	0.75	2.5	2.0:1	130	SK4
S060180L3401	6.0 - 18.0	10	20	34	1.00	2.5	2.0:1	170	SK5
S060180L4201	6.0 - 18.0	10	20	42	1.25	2.5	2.0:1	210	SK6
S060180L5001	6.0 - 18.0	10	20	50	1.50	2.5	2.0:1	250	SK7
S060180L1002	6.0 - 18.0	14	24	10	0.50	2.5	2.0:1	70	SK2
S060180L1802	6.0 - 18.0	14	24	18	0.50	2.5	2.0:1	110	SK3
S060180L2602	6.0 - 18.0	14	24	26	0.75	2.5	2.0:1	150	SK4
S060180L3402	6.0 - 18.0	14	24	34	1.00	2.5	2.0:1	190	SK5
S060180L4202	6.0 - 18.0	14	24	42	1.25	2.5	2.0:1	230	SK6
S060180L5002	6.0 - 18.0	14	24	50	1.50	2.5	2.0:1	270	SK7
S060180L1003	6.0 - 18.0	17	27	10	0.50	3.5	2.0:1	90	SK2
S060180L1803	6.0 - 18.0	17	27	18	0.50	2.5	2.0:1	130	SK3
S060180L2603	6.0 - 18.0	17	27	26	0.75	2.5	2.0:1	170	SK4
S060180L3403	6.0 - 18.0	17	27	34	1.00	2.5	2.0:1	210	SK5
S060180L4203	6.0 - 18.0	17	27	42	1.25	2.5	2.0:1	250	SK6
S060180L5003	6.0 - 18.0	17	27	50	1.50	2.5	2.0:1	290	SK7
S060180L0901	6.0 - 18.0	20	30	9	0.50	4.0	2.0:1	120	SK2
S060180L1804	6.0 - 18.0	20	30	18	0.50	2.8	2.0:1	160	SK3
S060180L2604	6.0 - 18.0	20	30	26	0.75	2.5	2.0:1	200	SK4
S060180L3404	6.0 - 18.0	20	30	34	1.00	2.5	2.0:1	240	SK5
S060180L4204	6.0 - 18.0	20	30	42	1.25	2.5	2.0:1	280	SK6
S060180L5004	6.0 - 18.0	20	30	50	1.50	2.5	2.0:1	320	SK7
S060180M1501	6.0 - 18.0	24	34	15	0.50	4.0	2.0:1	230	SK3
S060180M2401	6.0 - 18.0	24	34	24	0.75	3.0	2.0:1	280	SK4
S060180M3201	6.0 - 18.0	24	34	32	1.00	2.8	2.0:1	330	SK5
S060180M4001	6.0 - 18.0	24	34	40	1.25	2.8	2.0:1	380	SK6
S060180M4801	6.0 - 18.0	24	34	48	1.50	2.5	2.0:1	430	SK7
S060180M1201	6.0 - 18.0	27	37	12	0.50	5.0	2.0:1	450	SK3
S060180M2001	6.0 - 18.0	27	37	20	0.75	4.0	2.0:1	530	SK4
S060180M2901	6.0 - 18.0	27	37	29	1.00	3.0	2.0:1	570	SK5
S060180M3801	6.0 - 18.0	27	37	38	1.25	2.8	2.0:1	620	SK6
S060180M4601	6.0 - 18.0	27	37	46	1.50	2.5	2.0:1	650	SK7
S060180P0901	6.0 - 18.0	30	40	9	0.75	7.0	2.0:1	800	SK4
S060180P1601	6.0 - 18.0	30	40	16	1.00	6.0	2.0:1	950	SK5
S060180P2501	6.0 - 18.0	30	40	25	1.25	5.5	2.0:1	1120	SK6
S060180P3401	6.0 - 18.0	30	40	34	1.50	2.8	2.0:1	1200	SK7

**8.0 - 18.0 GHz**

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. ( $\pm$ dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S080180L1001	8.0 - 18.0	10	20	10	0.50	2.2	1.8:1	50	SK2
S080180L1801	8.0 - 18.0	10	20	18	0.50	2.3	1.8:1	90	SK3
S080180L2601	8.0 - 18.0	10	20	26	0.75	2.3	1.8:1	130	SK4
S080180L3401	8.0 - 18.0	10	20	34	1.00	2.3	1.8:1	170	SK5
S080180L4201	8.0 - 18.0	10	20	42	1.25	2.3	1.8:1	210	SK6
S080180L5001	8.0 - 18.0	10	20	50	1.50	2.3	1.8:1	250	SK7
S080180L1002	8.0 - 18.0	14	24	10	0.50	2.3	1.8:1	70	SK2
S080180L1802	8.0 - 18.0	14	24	18	0.50	2.3	1.8:1	110	SK3
S080180L2602	8.0 - 18.0	14	24	26	0.75	2.3	1.8:1	150	SK4
S080180L3402	8.0 - 18.0	14	24	34	1.00	2.3	1.8:1	190	SK5
S080180L4202	8.0 - 18.0	14	24	42	1.25	2.3	1.8:1	230	SK6
S080180L5002	8.0 - 18.0	14	24	50	1.50	2.3	1.8:1	270	SK7
S080180L1003	8.0 - 18.0	17	27	10	0.50	3.0	1.8:1	90	SK2
S080180L1803	8.0 - 18.0	17	27	18	0.50	2.3	1.8:1	130	SK3
S080180L2603	8.0 - 18.0	17	27	26	0.75	2.3	1.8:1	170	SK4
S080180L3403	8.0 - 18.0	17	27	34	1.00	2.3	1.8:1	210	SK5
S080180L4203	8.0 - 18.0	17	27	42	1.25	2.3	1.8:1	250	SK6
S080180L5003	8.0 - 18.0	17	27	50	1.50	2.3	1.8:1	290	SK7
S080180L0901	8.0 - 18.0	20	30	9	0.50	4.0	1.8:1	120	SK2
S080180L1804	8.0 - 18.0	20	30	18	0.50	2.8	1.8:1	160	SK3
S080180L2604	8.0 - 18.0	20	30	26	0.75	2.5	1.8:1	200	SK4
S080180L3404	8.0 - 18.0	20	30	34	1.00	2.5	1.8:1	240	SK5
S080180L4204	8.0 - 18.0	20	30	42	1.25	2.5	1.8:1	280	SK6
S080180L5004	8.0 - 18.0	20	30	50	1.50	2.5	1.8:1	320	SK7
S080180M1501	8.0 - 18.0	24	34	15	0.50	4.0	1.8:1	230	SK3
S080180M2401	8.0 - 18.0	24	34	24	0.75	3.0	1.8:1	280	SK4
S080180M3201	8.0 - 18.0	24	34	32	1.00	2.8	1.8:1	330	SK5
S080180M4001	8.0 - 18.0	24	34	40	1.25	2.8	1.8:1	380	SK6
S080180M4801	8.0 - 18.0	24	34	48	1.50	2.5	1.8:1	430	SK7
S080180M1201	8.0 - 18.0	27	37	12	0.50	5.0	1.8:1	450	SK3
S080180M2001	8.0 - 18.0	27	37	20	0.75	4.0	1.8:1	530	SK4
S080180M2901	8.0 - 18.0	27	37	29	1.00	3.0	1.8:1	570	SK5
S080180M3801	8.0 - 18.0	27	37	38	1.25	2.8	1.8:1	620	SK6
S080180M4601	8.0 - 18.0	27	37	46	1.50	2.5	1.8:1	650	SK7
S080180P0901	8.0 - 18.0	30	40	9	0.75	7.0	1.8:1	800	SK4
S080180P1601	8.0 - 18.0	30	40	16	1.00	6.0	1.8:1	950	SK5
S080180P2501	8.0 - 18.0	30	40	25	1.25	5.5	1.8:1	1120	SK6
S080180P3401	8.0 - 18.0	30	40	34	1.50	2.8	1.8:1	1200	SK7

12.0 - 18.0 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. ( $\pm$ dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S120180L1001	12.0 - 18.0	10	20	10	0.50	2.0	1.8:1	50	SK2
S120180L1801	12.0 - 18.0	10	20	18	0.50	2.0	1.8:1	90	SK3
S120180L2601	12.0 - 18.0	10	20	26	0.75	2.0	1.8:1	130	SK4
S120180L3401	12.0 - 18.0	10	20	34	1.00	2.0	1.8:1	170	SK5
S120180L4201	12.0 - 18.0	10	20	42	1.25	2.0	1.8:1	210	SK6
S120180L5001	12.0 - 18.0	10	20	50	1.50	2.0	1.8:1	250	SK7
S120180L1002	12.0 - 18.0	14	24	10	0.50	2.2	1.8:1	70	SK2
S120180L1802	12.0 - 18.0	14	24	18	0.50	2.0	1.8:1	110	SK3
S120180L2602	12.0 - 18.0	14	24	26	0.75	2.0	1.8:1	150	SK4
S120180L3402	12.0 - 18.0	14	24	34	1.00	2.0	1.8:1	190	SK5
S120180L4202	12.0 - 18.0	14	24	42	1.25	2.0	1.8:1	230	SK6
S120180L5002	12.0 - 18.0	14	24	50	1.50	2.0	1.8:1	270	SK7
S120180L1003	12.0 - 18.0	17	27	10	0.50	2.8	1.8:1	90	SK2
S120180L1803	12.0 - 18.0	17	27	18	0.50	2.0	1.8:1	130	SK3
S120180L2603	12.0 - 18.0	17	27	26	0.75	2.0	1.8:1	170	SK4
S120180L3403	12.0 - 18.0	17	27	34	1.00	2.0	1.8:1	210	SK5
S120180L4203	12.0 - 18.0	17	27	42	1.25	2.0	1.8:1	250	SK6
S120180L5003	12.0 - 18.0	17	27	50	1.50	2.0	1.8:1	290	SK7
S120180L0901	12.0 - 18.0	20	30	9	0.50	4.0	1.8:1	120	SK2
S120180L1804	12.0 - 18.0	20	30	18	0.50	2.8	1.8:1	160	SK3
S120180L2604	12.0 - 18.0	20	30	26	0.75	2.3	1.8:1	200	SK4
S120180L3404	12.0 - 18.0	20	30	34	1.00	2.3	1.8:1	240	SK5
S120180L4204	12.0 - 18.0	20	30	42	1.25	2.3	1.8:1	280	SK6
S120180L5004	12.0 - 18.0	20	30	50	1.50	2.3	1.8:1	320	SK7
S120180M1501	12.0 - 18.0	24	34	15	0.50	4.0	1.8:1	230	SK3
S120180M2401	12.0 - 18.0	24	34	24	0.75	3.0	1.8:1	280	SK4
S120180M3201	12.0 - 18.0	24	34	32	1.00	2.5	1.8:1	330	SK5
S120180M4001	12.0 - 18.0	24	34	40	1.25	2.5	1.8:1	380	SK6
S120180M4801	12.0 - 18.0	24	34	48	1.50	2.3	1.8:1	430	SK7
S120180M1201	12.0 - 18.0	27	37	12	0.50	5.0	1.8:1	450	SK3
S120180M2001	12.0 - 18.0	27	37	20	0.75	4.0	1.8:1	530	SK4
S120180M2901	12.0 - 18.0	27	37	29	1.00	3.0	1.8:1	570	SK5
S120180M3801	12.0 - 18.0	27	37	38	1.25	2.5	1.8:1	620	SK6
S120180M4601	12.0 - 18.0	27	37	46	1.50	2.3	1.8:1	650	SK7
S120180P0901	12.0 - 18.0	30	40	9	0.75	7.0	1.8:1	800	SK4
S120180P1601	12.0 - 18.0	30	40	16	1.00	6.0	1.8:1	950	SK5
S120180P2501	12.0 - 18.0	30	40	25	1.25	5.5	1.8:1	1120	SK6
S120180P3401	12.0 - 18.0	30	40	34	1.50	2.5	1.8:1	1200	SK7



18.0 - 26.5 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S180265L1601	18.0 - 26.5	8	18	16	1.00	3.3	2.0:1	100	XK3
S180265L2401	18.0 - 26.5	8	18	24	1.25	3.3	2.0:1	150	XK4
S180265L3201	18.0 - 26.5	8	18	32	1.50	3.3	2.0:1	200	XK5
S180265L1602	18.0 - 26.5	10	20	16	1.00	3.5	2.0:1	110	XK3
S180265L2402	18.0 - 26.5	10	20	24	1.25	3.5	2.0:1	160	XK4
S180265L3202	18.0 - 26.5	10	20	32	1.50	3.5	2.0:1	210	XK5
S180265L1501	18.0 - 26.5	13	23	15	1.00	3.5	2.0:1	120	XK3
S180265L2301	18.0 - 26.5	13	23	23	1.25	3.5	2.0:1	170	XK4
S180265L3101	18.0 - 26.5	13	23	31	1.50	3.5	2.0:1	220	XK5
S180265L1502	18.0 - 26.5	17	27	15	1.00	4.0	2.0:1	140	XK3
S180265L2302	18.0 - 26.5	17	27	23	1.25	3.5	2.0:1	190	XK4
S180265L3102	18.0 - 26.5	17	27	31	1.50	3.5	2.0:1	240	XK5
S180265L1401	18.0 - 26.5	20	30	14	1.00	4.0	2.0:1	160	XK3
S180265L2201	18.0 - 26.5	20	30	22	1.25	3.5	2.0:1	210	XK4
S180265L3001	18.0 - 26.5	20	30	30	1.50	3.5	2.0:1	260	XK5
S180265M1401	18.0 - 26.5	23	33	14	1.00	4.0	2.0:1	210	XK3
S180265M2201	18.0 - 26.5	23	33	22	1.25	4.0	2.0:1	260	XK4
S180265M3001	18.0 - 26.5	23	33	30	1.50	4.0	2.0:1	310	XK5

Operating Temperature 0 to 70°C  
 Specified Performance guaranteed @ 25 °C  
 Military and Space Specifications and Screening Available

15.0 - 30 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S150300L1601	15.0 - 30.0	8	18	16	1.00	4.0	2.0:1	100	XK3
S150300L2401	15.0 - 30.0	8	18	24	1.25	4.0	2.0:1	150	XK4
S150300L3201	15.0 - 30.0	8	18	32	1.50	4.0	2.0:1	200	XK5
S150300L1602	15.0 - 30.0	10	20	16	1.00	4.3	2.0:1	110	XK3
S150300L2402	15.0 - 30.0	10	20	24	1.25	4.3	2.0:1	160	XK4
S150300L3202	15.0 - 30.0	10	20	32	1.50	4.3	2.0:1	210	XK5
S150300L1501	15.0 - 30.0	13	23	15	1.00	4.5	2.0:1	120	XK3
S150300L2301	15.0 - 30.0	13	23	23	1.25	4.3	2.0:1	170	XK4
S150300L3101	15.0 - 30.0	13	23	31	1.50	4.3	2.0:1	220	XK5
S150300L1502	15.0 - 30.0	17	27	15	1.00	4.5	2.0:1	140	XK3
S150300L2302	15.0 - 30.0	17	27	23	1.25	4.3	2.0:1	190	XK4
S150300L3102	15.0 - 30.0	17	27	31	1.50	4.3	2.0:1	240	XK5
S150300L1401	15.0 - 30.0	20	30	14	1.00	4.5	2.0:1	160	XK3
S150300L2201	15.0 - 30.0	20	30	22	1.25	4.3	2.0:1	210	XK4
S150300L3001	15.0 - 30.0	20	30	30	1.50	4.3	2.0:1	260	XK5
S150300M1401	15.0 - 30.0	23	33	14	1.00	5.0	2.0:1	210	XK3
S150300M2201	15.0 - 30.0	23	33	22	1.25	4.5	2.0:1	260	XK4
S150300M3001	15.0 - 30.0	23	33	30	1.50	4.5	2.0:1	310	XK5

Operating Temperature 0 to 70°C  
 Specified Performance guaranteed @ 25 °C  
 Military and Space Specifications and Screening Available

## 1.2 - 1.6 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. ( $\pm$ dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S012016L1701	1.2 - 1.6	10	20	17	0.25	0.8	1.5:1	70	LK2
S012016L3301	1.2 - 1.6	10	20	33	0.50	0.8	1.5:1	120	LK3
S012016L5001	1.2 - 1.6	10	20	50	0.75	0.8	1.5:1	170	SK4
S012016L1702	1.2 - 1.6	13	23	17	0.25	0.8	1.5:1	75	LK2
S012016L3302	1.2 - 1.6	13	23	33	0.50	0.8	1.5:1	130	LK3
S012016L5002	1.2 - 1.6	13	23	50	0.75	0.8	1.5:1	180	LK4
S012016L1703	1.2 - 1.6	17	27	17	0.25	1.5	1.5:1	110	LK2
S012016L3303	1.2 - 1.6	17	27	33	0.50	0.8	1.5:1	160	LK3
S012016L5003	1.2 - 1.6	17	27	50	0.75	0.8	1.5:1	210	LK4
S012016L1704	1.2 - 1.6	20	30	17	0.25	1.8	1.5:1	120	LK2
S012016L3304	1.2 - 1.6	20	30	33	0.50	0.9	1.5:1	170	LK3
S012016L5004	1.2 - 1.6	20	30	50	0.75	0.8	1.5:1	220	LK4
S012016M1601	1.2 - 1.6	23	33	16	0.25	2.0	1.5:1	130	LK2
S012016M3201	1.2 - 1.6	23	33	32	0.50	1.0	1.5:1	180	LK3
S012016M4901	1.2 - 1.6	23	33	49	0.75	0.8	1.5:1	230	LK4
S012016M1602	1.2 - 1.6	27	37	16	0.25	3.0	1.5:1	350	LK2
S012016M3202	1.2 - 1.6	27	37	32	0.50	1.0	1.5:1	420	LK3
S012016M4902	1.2 - 1.6	27	37	49	0.75	0.8	1.5:1	480	LK4
S012016P1501	1.2 - 1.6	30	40	15	0.25	4.0	1.5:1	550	LK2
S012016P3101	1.2 - 1.6	30	40	31	0.50	2.5	1.5:1	660	LK3
S012016P4801	1.2 - 1.6	30	40	48	0.75	1.0	1.5:1	710	LK4

Operating Temperature 0 to 70°C  
 Specified Performance guaranteed @ 25 °C  
 Military and Space Specifications and Screening Available

## 2.7 - 2.9 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S027029L1501	2.7 - 2.9	10	20	15	0.25	0.9	1.5:1	70	LK2
S027029L3001	2.7 - 2.9	10	20	30	0.50	0.9	1.5:1	120	LK3
S027029L4501	2.7 - 2.9	10	20	45	0.75	0.9	1.5:1	170	LK4
S027029L1502	2.7 - 2.9	13	23	15	0.25	0.9	1.5:1	75	LK2
S027029L3002	2.7 - 2.9	13	23	30	0.50	0.9	1.5:1	130	LK3
S027029L4502	2.7 - 2.9	13	23	45	0.75	0.9	1.5:1	180	LK4
S027029L1503	2.7 - 2.9	17	27	15	0.25	1.5	1.5:1	110	LK2
S027029L3003	2.7 - 2.9	17	27	30	0.50	0.9	1.5:1	160	LK3
S027029L4503	2.7 - 2.9	17	27	45	0.75	0.9	1.5:1	210	LK4
S027029L1504	2.7 - 2.9	20	30	15	0.25	1.8	1.5:1	120	LK2
S027029L3204	2.7 - 2.9	20	30	30	0.50	0.9	1.5:1	170	LK3
S027029L5904	2.7 - 2.9	20	30	45	0.75	0.9	1.5:1	220	LK4
S027029M1501	2.7 - 2.9	23	33	15	0.25	2.5	1.5:1	140	LK2
S027029M3001	2.7 - 2.9	23	33	30	0.50	1.2	1.5:1	190	LK3
S027029M4501	2.7 - 2.9	23	33	45	0.75	0.9	1.5:1	240	LK4
S027029M1502	2.7 - 2.9	27	37	15	0.25	2.5	1.5:1	350	LK2
S027029M3002	2.7 - 2.9	27	37	30	0.50	1.5	1.5:1	420	LK3
S027029M4502	2.7 - 2.9	27	37	45	0.75	1.5	1.5:1	480	LK4
S027029P1201	2.7 - 2.9	30	40	12	0.25	2.5	1.5:1	550	LK2
S027029P2701	2.7 - 2.9	30	40	27	0.50	1.2	1.5:1	660	LK3
S027029P4301	2.7 - 2.9	30	40	43	0.75	0.9	1.5:1	710	LK4

Operating Temperature 0 to 70°C

Specified Performance guaranteed @ 25 °C

Military and Space Specifications and Screening Available

**5.4 - 5.9 GHz**

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S054059L1301	5.4 - 5.9	8	18	13	0.25	0.8	1.8:1	50	LK2
S054059L2601	5.4 - 5.9	10	20	26	0.50	0.8	1.8:1	100	LK3
S054059L3801	5.4 - 5.9	10	10	38	0.75	0.8	1.8:1	150	LK4
S054059L1302	5.4 - 5.9	13	23	13	0.25	1.0	1.5:1	75	LK2
S054059L2602	5.4 - 5.9	13	23	26	0.50	0.8	1.5:1	130	LK3
S054059L3802	5.4 - 5.9	13	23	38	0.75	0.8	1.5:1	180	LK4
S054059L1303	5.4 - 5.9	17	27	13	0.25	1.5	1.5:1	110	LK2
S054059L2603	5.4 - 5.9	17	27	26	0.50	1.0	1.5:1	160	LK3
S054059L3803	5.4 - 5.9	17	27	38	0.75	0.8	1.5:1	210	LK4
S054059L1501	5.4 - 5.9	20	30	15	0.25	2.0	1.5:1	120	LK2
S054059L3001	5.4 - 5.9	20	30	30	0.50	1.6	1.5:1	170	LK3
S054059L4501	5.4 - 5.9	20	30	45	0.75	1.6	1.5:1	220	LK4
S054059M1401	5.4 - 5.9	23	33	14	0.25	2.5	1.5:1	140	LK2
S054059M2701	5.4 - 5.9	23	33	27	0.50	1.6	1.5:1	190	LK3
S054059M4301	5.4 - 5.9	23	33	43	0.75	1.6	1.5:1	240	LK4
S054059M1401	5.4 - 5.9	27	37	14	0.25	3.0	1.5:1	450	SK2
S054059M2701	5.4 - 5.9	27	37	27	0.50	2.0	1.5:1	530	SK3
S054059M4301	5.4 - 5.9	27	37	43	0.75	1.6	1.5:1	580	SK4
S054059P1101	5.4 - 5.9	30	40	11	0.25	4.0	1.5:1	550	SK2
S054059P2501	5.4 - 5.9	30	40	25	0.50	2.5	1.5:1	660	SK3
S054059P4001	5.4 - 5.9	30	40	40	0.75	1.6	1.5:1	710	SK4

Operating Temperature 0 to 70°C  
 Specified Performance guaranteed @ 25 °C  
 Military and Space Specifications and Screening Available

## 9.5 - 10.5 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S095105L1601	9.5 - 10.5	10	10	16	0.50	1.0	1.8:1	80	SK3
S095105L2401	9.5 - 10.5	10	20	24	0.75	1.0	1.8:1	120	SK4
S095105L3201	9.5 - 10.5	10	10	32	1.00	1.0	1.8:1	160	SK5
S095105L1801	9.5 - 10.5	13	23	18	0.50	1.5	1.8:1	90	SK3
S095105L2601	9.5 - 10.5	13	23	26	0.75	1.0	1.8:1	130	SK4
S095105L3801	9.5 - 10.5	13	23	38	1.00	1.0	1.8:1	170	SK5
S095105L1802	9.5 - 10.5	17	27	18	0.50	1.5	1.5:1	130	SK3
S095105L3002	9.5 - 10.5	17	27	30	0.75	1.2	1.5:1	180	SK4
S095105L4202	9.5 - 10.5	17	27	42	1.00	1.2	1.5:1	230	SK5
S095105L1201	9.5 - 10.5	20	30	12	0.25	3.0	1.5:1	90	SK2
S095105L2401	9.5 - 10.5	20	30	24	0.50	2.3	1.5:1	140	SK3
S095105L3201	9.5 - 10.5	20	30	32	0.75	1.5	1.5:1	220	SK4
S095105L4001	9.5 - 10.5	20	30	40	1.00	1.0	1.5:1	270	SK5
S095105M1201	9.5 - 10.5	23	33	12	0.25	4.0	1.5:1	150	SK2
S095105M2401	9.5 - 10.5	23	33	24	0.50	2.2	1.5:1	170	SK3
S095105M3201	9.5 - 10.5	23	33	32	0.75	1.5	1.5:1	220	SK4
S095105M4401	9.5 - 10.5	23	33	44	1.00	1.5	1.5:1	270	SK5
S095105M1001	9.5 - 10.5	27	37	10	0.25	5.0	1.5:1	350	SK2
S095105M2201	9.5 - 10.5	27	37	22	0.50	3.5	1.5:1	430	SK3
S095105M3001	9.5 - 10.5	27	37	30	0.75	2.0	1.5:1	470	SK4
S095105M3801	9.5 - 10.5	27	37	38	1.00	1.5	1.5:1	520	SK5
S095105P1801	9.5 - 10.5	30	40	18	0.50	4.5	1.5:1	700	SK3
S095105P3001	9.5 - 10.5	30	40	30	0.75	2.5	1.5:1	780	SK4
S095105P4201	9.5 - 10.5	30	40	42	1.00	1.5	1.5:1	830	SK6

Operating Temperature 0 to 70°C  
 Specified Performance guaranteed @ 25 °C  
 Military and Space Specifications and Screening Available

## 14.0 - 14.5 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S140145L0901	14.0 - 14.5	10	20	9	0.50	1.4	1.5:1	50	SK2
S140145L1801	14.0 - 14.5	10	20	18	0.75	1.5	1.5:1	100	SK3
S140145L2701	14.0 - 14.5	10	20	27	1.00	1.5	1.5:1	150	SK4
S140145L3601	14.0 - 14.5	10	20	36	1.25	1.5	1.5:1	200	SK5
S140145L0902	14.0 - 14.5	13	23	9	0.50	1.8	1.5:1	70	SK2
S140145L1802	14.0 - 14.5	13	23	18	0.75	1.5	1.5:1	120	SK3
S140145L2702	14.0 - 14.5	13	23	27	1.00	1.5	1.5:1	170	SK4
S140145L3602	14.0 - 14.5	13	23	36	1.25	1.5	1.5:1	220	SK5
S140145L0903	14.0 - 14.5	17	27	9	0.25	2.5	1.5:1	90	SK2
S140145L1803	14.0 - 14.5	17	27	18	0.50	2.0	1.5:1	140	SK3
S140145L2703	14.0 - 14.5	17	27	27	0.75	1.8	1.5:1	190	SK4
S140145L3603	14.0 - 14.5	17	27	36	1.00	1.5	1.5:1	240	SK5
S140145L0904	14.0 - 14.5	20	30	9	0.25	3.5	1.5:1	110	SK2
S140145L1804	14.0 - 14.5	20	30	18	0.50	2.5	1.5:1	160	SK3
S140145L2704	14.0 - 14.5	20	30	27	0.75	1.8	1.5:1	210	SK4
S140145L3604	14.0 - 14.5	20	30	36	1.00	1.5	1.5:1	260	SK5
S140145M0801	14.0 - 14.5	23	33	8	0.25	4.0	1.5:1	140	SK2
S140145M1701	14.0 - 14.5	23	33	17	0.50	3.5	1.5:1	190	SK3
S140145M2601	14.0 - 14.5	23	33	26	0.75	2.0	1.5:1	240	SK4
S140145M3501	14.0 - 14.5	23	33	35	1.00	1.8	1.5:1	290	SK5
S140145M1401	14.0 - 14.5	27	37	14	0.50	5.0	1.5:1	500	SK3
S140145M2301	14.0 - 14.5	27	37	23	0.75	3.0	1.5:1	580	SK4
S140145M3201	14.0 - 14.5	27	37	32	1.00	2.0	1.5:1	630	SK5
S140145P1001	14.0 - 14.5	30	40	10	0.50	6.0	1.5:1	800	SK3
S140145P1701	14.0 - 14.5	30	40	17	0.75	5.0	1.5:1	940	SK4
S140145P2601	14.0 - 14.5	30	40	26	1.00	4.0	1.5:1	1030	SK5
S140145P3501	14.0 - 14.5	30	40	35	1.25	3.0	1.5:1	1080	SK6

Operating Temperature 0 to 70°C

Specified Performance guaranteed @ 25 °C

Military and Space Specifications and Screening Available

## 13.7 - 15.4 GHz

Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. ( $\pm$ dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S137154L0901	13.75 - 15.4	10	20	9	0.50	1.5	1.5:1	50	SK2
S137154L1801	13.75 - 15.4	10	20	18	0.75	1.6	1.5:1	100	SK3
S137154L2701	13.75 - 15.4	10	20	27	1.00	1.6	1.5:1	150	SK4
S137154L3601	13.75 - 15.4	10	20	36	1.25	1.6	1.5:1	200	SK5
S137154L0902	13.75 - 15.4	13	23	9	0.50	1.7	1.5:1	70	SK2
S137154L1802	13.75 - 15.4	13	23	18	0.75	1.6	1.5:1	120	SK3
S137154L2702	13.75 - 15.4	13	23	27	1.00	1.6	1.5:1	170	SK4
S137154L3602	13.75 - 15.4	13	23	36	1.25	1.6	1.5:1	220	SK5
S137154L0903	13.75 - 15.4	17	27	9	0.25	2.5	1.5:1	90	SK2
S137154L1803	13.75 - 15.4	17	27	18	0.50	2.0	1.5:1	140	SK3
S137154L2703	13.75 - 15.4	17	27	27	0.75	1.8	1.5:1	190	SK4
S137154L3603	13.75 - 15.4	17	27	36	1.00	1.6	1.5:1	240	SK5
S137154L0904	13.75 - 15.4	20	30	9	0.25	3.5	1.5:1	110	SK2
S137154L1804	13.75 - 15.4	20	30	18	0.50	2.5	1.5:1	160	SK3
S137154L2704	13.75 - 15.4	20	30	27	0.75	1.8	1.5:1	210	SK4
S137154L3604	13.75 - 15.4	20	30	36	1.00	1.6	1.5:1	260	SK5
S137154M0801	13.75 - 15.4	23	33	8	0.25	4.0	1.5:1	140	SK2
S137154M1701	13.75 - 15.4	23	33	17	0.50	3.5	1.5:1	190	SK3
S137154M2601	13.75 - 15.4	23	33	26	0.75	2.0	1.5:1	240	SK4
S137154M3501	13.75 - 15.4	23	33	35	1.00	1.8	1.5:1	290	SK5
S137154M1401	13.75 - 15.4	27	37	14	0.50	5.0	1.5:1	500	SK3
S137154M2301	13.75 - 15.4	27	37	23	0.75	3.0	1.5:1	580	SK4
S137154M3201	13.75 - 15.4	27	37	32	1.00	2.0	1.5:1	630	SK5
S137154P1001	13.75 - 15.4	30	40	10	0.50	6.0	1.5:1	800	SK3
S137154P1701	13.75 - 15.4	30	40	17	0.75	5.0	1.5:1	940	SK4
S137154P2601	13.75 - 15.4	30	40	26	1.00	4.0	1.5:1	1030	SK5
S137154P3501	13.75 - 15.4	30	40	35	1.25	3.0	1.5:1	1080	SK6

Operating Temperature 0 to 70°C

Specified Performance guaranteed @ 25 °C

Military and Space Specifications and Screening Available



**17.7 - 18.3 GHz**


Model Number	Frequency Range (GHz)	Output Power P-1dB min. (dBm)	IP3 typical (dBm)	Gain min. (dB)	Gain Flatness max. (±dB)	Noise Figure max. (dB)	VSWR In/Out max.	Current Draw 12 - 15 VDC typical (mA)	Outline
S177183L0901	17.7 - 18.3	10	20	9	0.50	1.8	1.5:1	50	SK2
S177183L1801	17.7 - 18.3	10	20	18	0.75	1.8	1.5:1	100	SK3
S177183L2701	17.7 - 18.3	10	20	27	1.00	1.8	1.5:1	150	SK4
S177183L3601	17.7 - 18.3	10	20	36	1.25	1.8	1.5:1	200	SK5
S177183L0902	17.7 - 18.3	13	23	9	0.50	2.0	1.5:1	70	SK2
S177183L1802	17.7 - 18.3	13	23	18	0.75	1.8	1.5:1	120	SK3
S177183L2702	17.7 - 18.3	13	23	27	1.00	1.8	1.5:1	170	SK4
S177183L3602	17.7 - 18.3	13	23	36	1.25	1.8	1.5:1	220	SK5
S177183L0903	17.7 - 18.3	17	27	9	0.25	2.5	1.5:1	90	SK2
S177183L1803	17.7 - 18.3	17	27	18	0.50	2.0	1.5:1	140	SK3
S177183L2703	17.7 - 18.3	17	27	27	0.75	1.8	1.5:1	190	SK4
S177183L3603	17.7 - 18.3	17	27	36	1.00	1.8	1.5:1	240	SK5
S177183L0904	17.7 - 18.3	20	30	9	0.25	3.5	1.5:1	110	SK2
S177183L1804	17.7 - 18.3	20	30	18	0.50	2.5	1.5:1	160	SK3
S177183L2704	17.7 - 18.3	20	30	27	0.75	1.8	1.5:1	210	SK4
S177183L3604	17.7 - 18.3	20	30	36	1.00	1.8	1.5:1	260	SK5
S177183M0801	17.7 - 18.3	23	33	8	0.25	4.0	1.5:1	140	SK2
S177183M1701	17.7 - 18.3	23	33	17	0.50	3.5	1.5:1	190	SK3
S177183M2601	17.7 - 18.3	23	33	26	0.75	2.0	1.5:1	240	SK4
S177183M3501	17.7 - 18.3	23	33	35	1.00	2.0	1.5:1	290	SK5
S177183M1401	17.7 - 18.3	27	37	14	0.50	5.0	1.5:1	500	SK3
S177183M2301	17.7 - 18.3	27	37	23	0.75	3.0	1.5:1	580	SK4
S177183M3201	17.7 - 18.3	27	37	32	1.00	2.0	1.5:1	630	SK5
S177183P1001	17.7 - 18.3	30	40	10	0.50	6.0	1.5:1	800	SK3
S177183P1701	17.7 - 18.3	30	40	17	0.75	5.0	1.5:1	940	SK4
S177183P2601	17.7 - 18.3	30	40	26	1.00	4.0	1.5:1	1030	SK5
S177183P3501	17.7 - 18.3	30	40	35	1.25	3.0	1.5:1	1080	SK6

Operating Temperature 0 to 70°C


Specified Performance guaranteed @ 25 °C

Military and Space Specifications and Screening Available

## SK-2

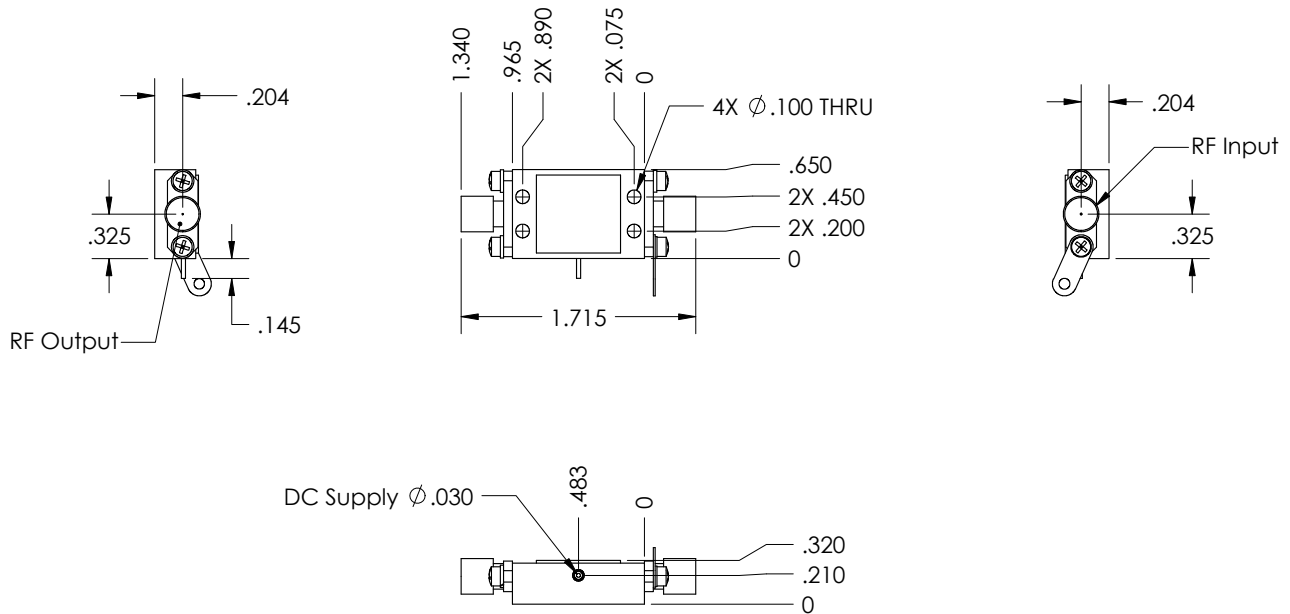


## SK-3

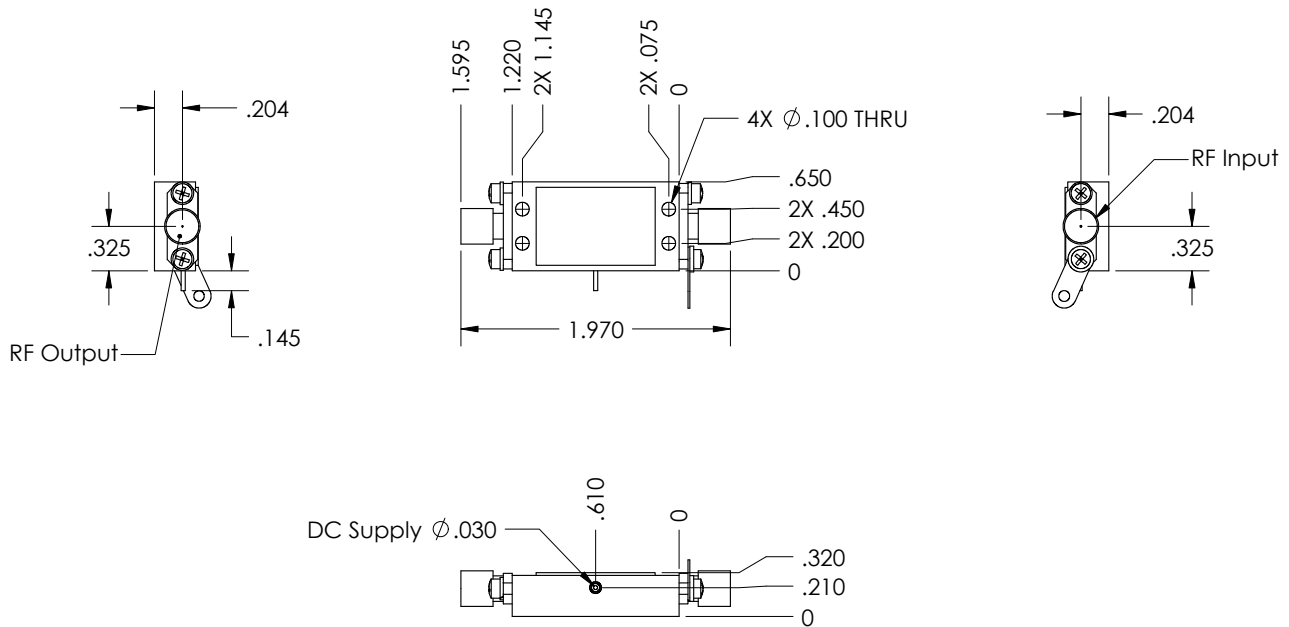


Notes:

- 1) Drawings not to scale
- 2) Ground, Supply Voltage are solderable terminals
- 3) RF connectors are field replaceable SMA female
- 4) Dimensions are subject to change in the interest of improved product performance

### SK-4

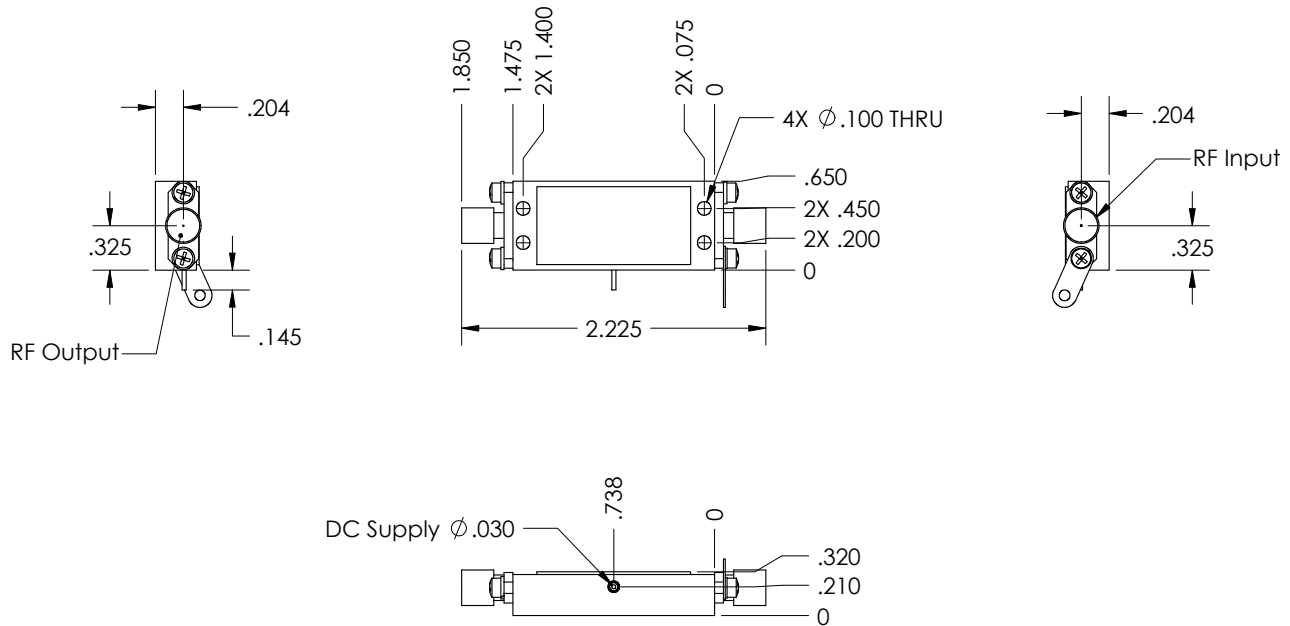


### SK-5

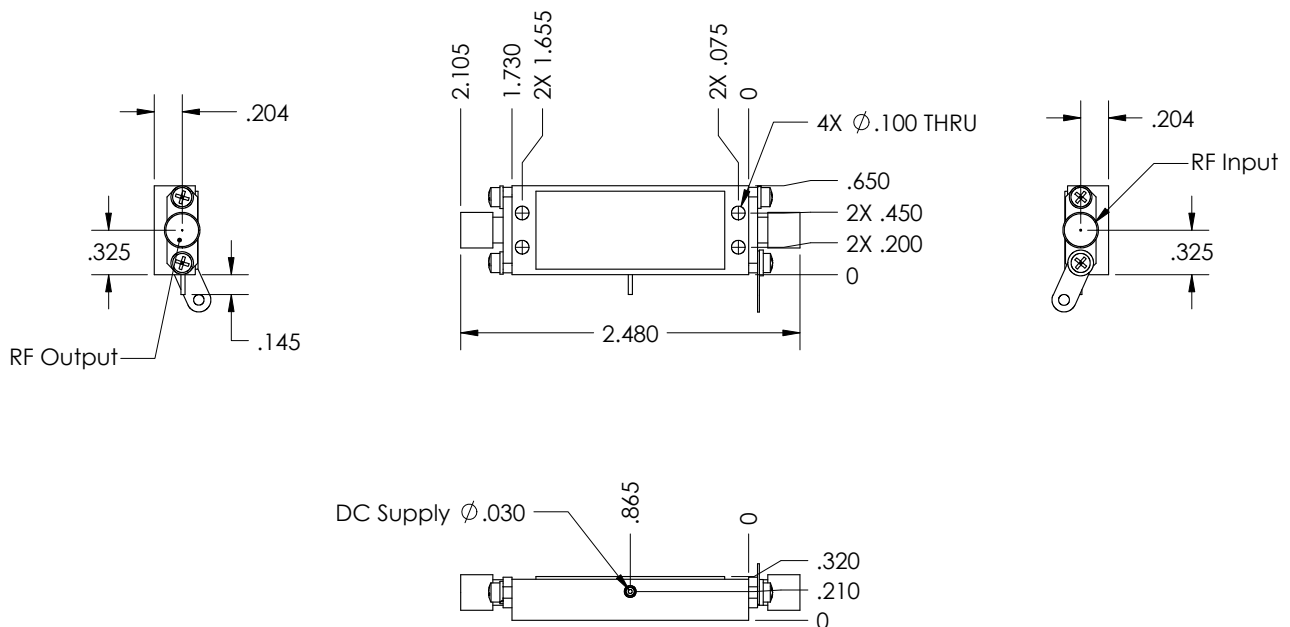


Notes:

- 1) Drawings not to scale
- 2) Ground, Supply Voltage are solderable terminals
- 3) RF connectors are field replaceable SMA female
- 4) Dimensions are subject to change in the interest of improved product performance

### SK-6

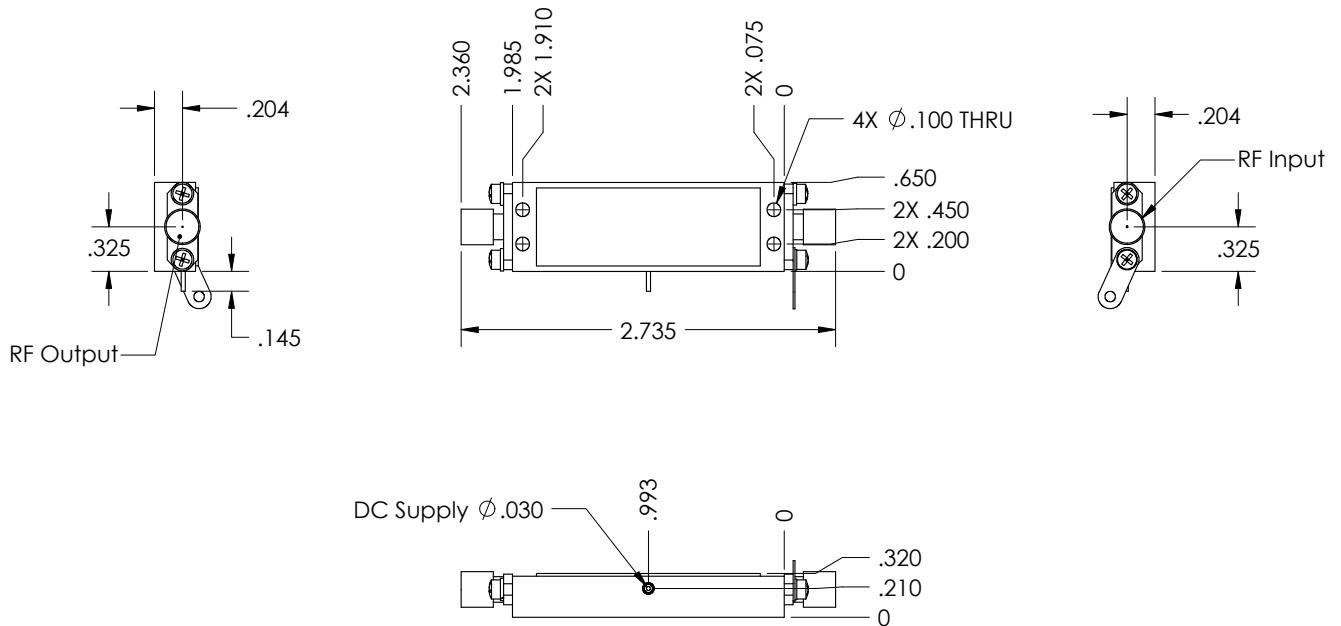


### SK-7

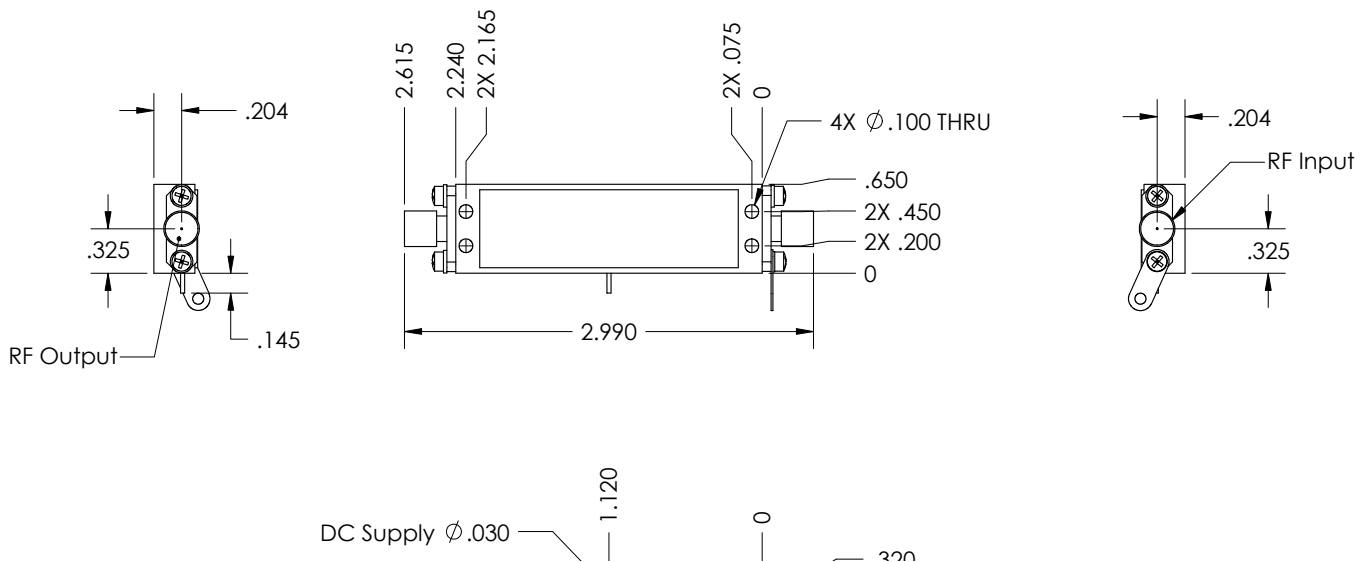


**Notes:**

- 1) Drawings not to scale
- 2) Ground, Supply Voltage are solderable terminals
- 3) RF connectors are field replaceable SMA female
- 4) Dimensions are subject to change in the interest of improved product performance

### LK-2

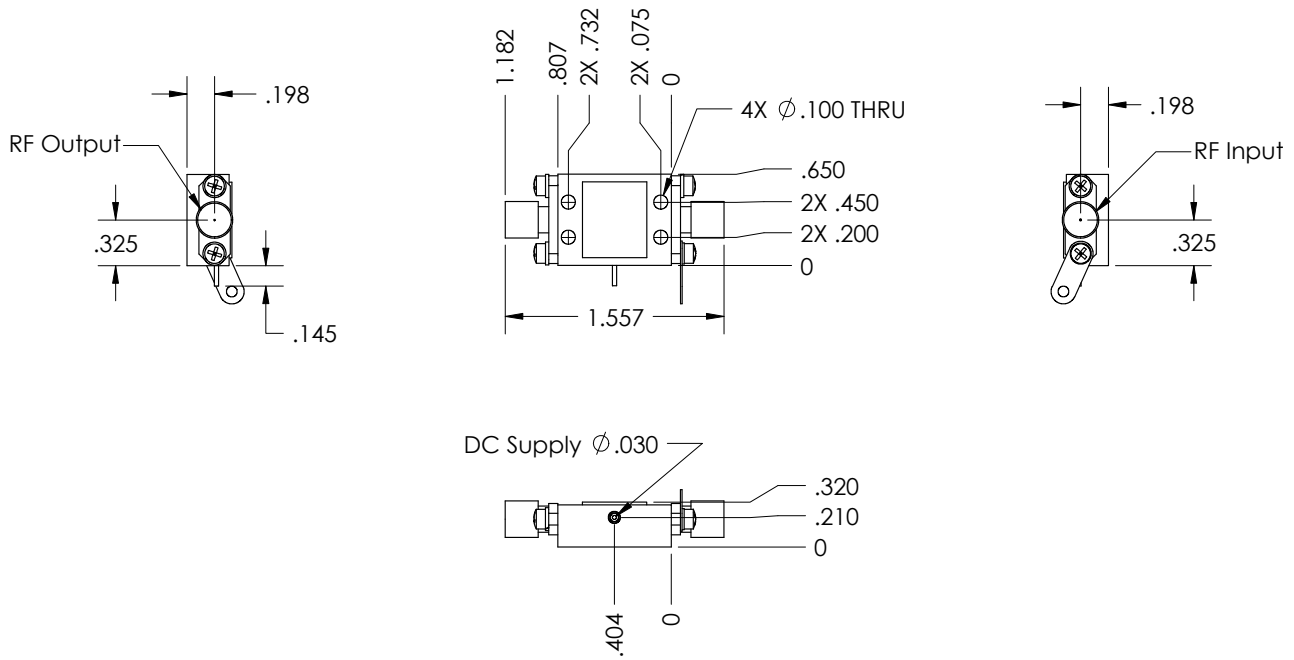


### LK-3

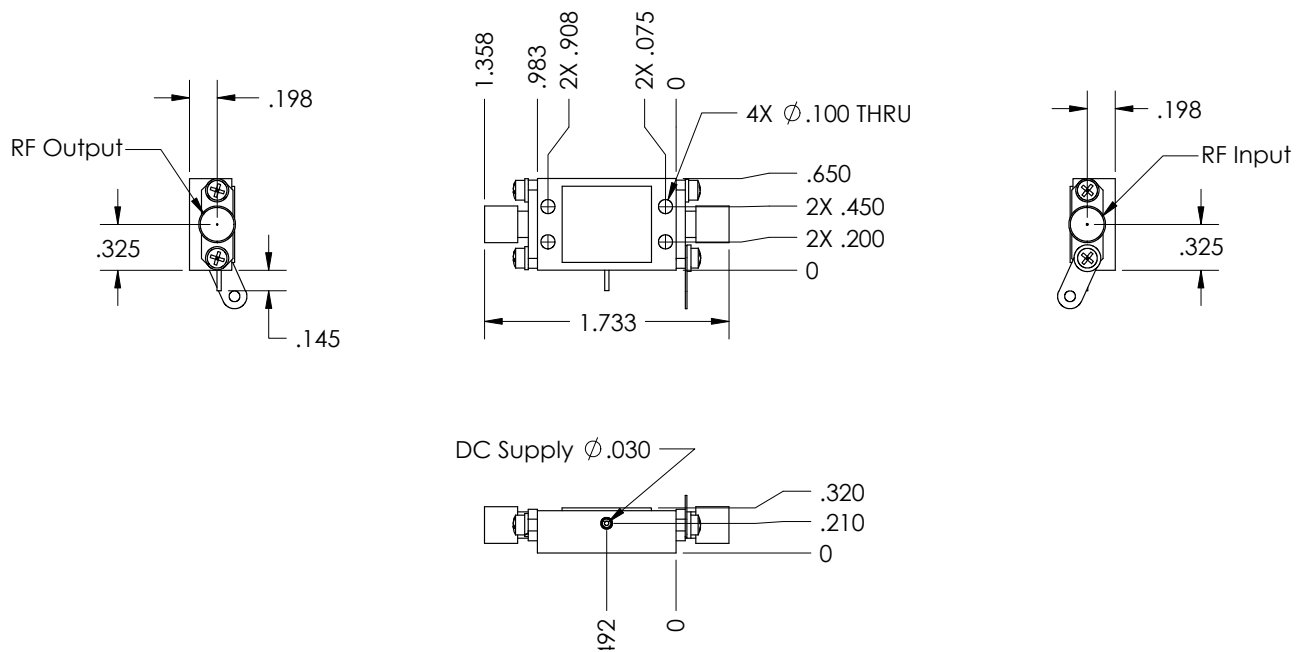


**Notes:**

- 1) Drawings not to scale
- 2) Ground, Supply Voltage are solderable terminals
- 3) RF connectors are field replaceable SMA female
- 4) Dimensions are subject to change in the interest of improved product performance

### LK-4

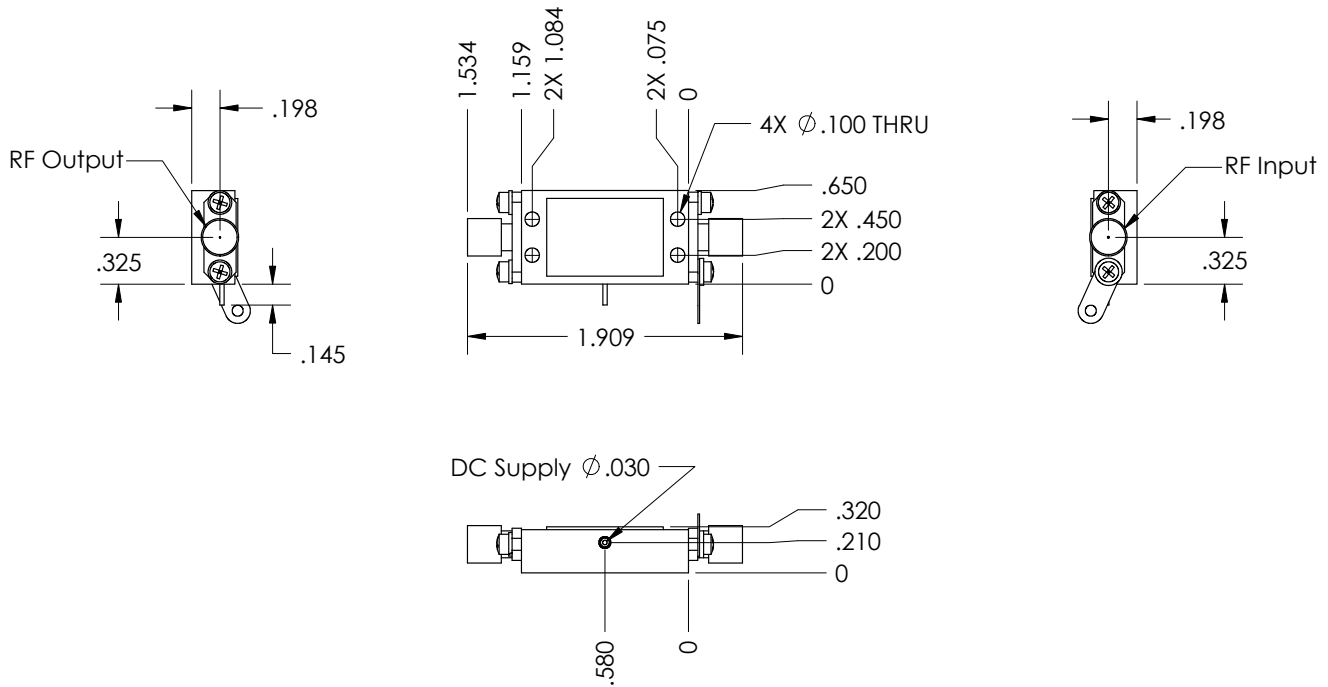


### LK-5

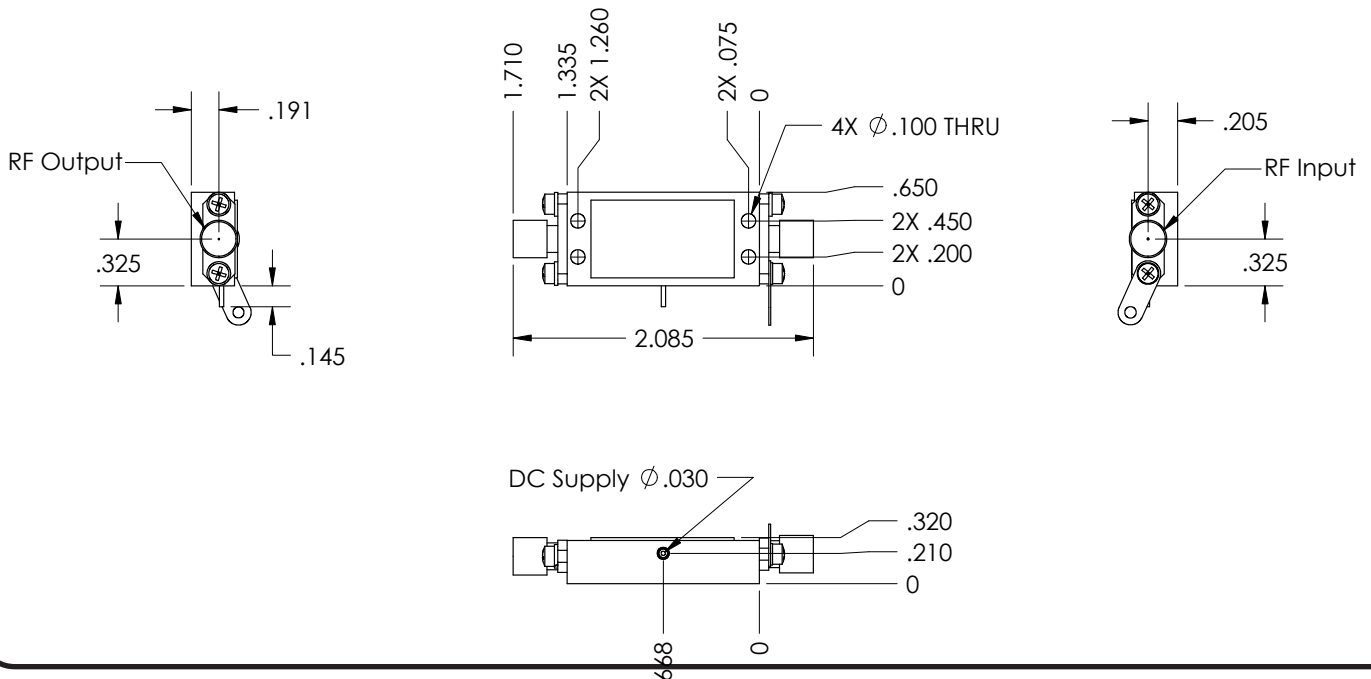


Notes:

- 1) Drawings not to scale
- 2) Ground, Supply Voltage are solderable terminals
- 3) RF connectors are field replaceable SMA female
- 4) Dimensions are subject to change in the interest of improved product performance

## XK-2

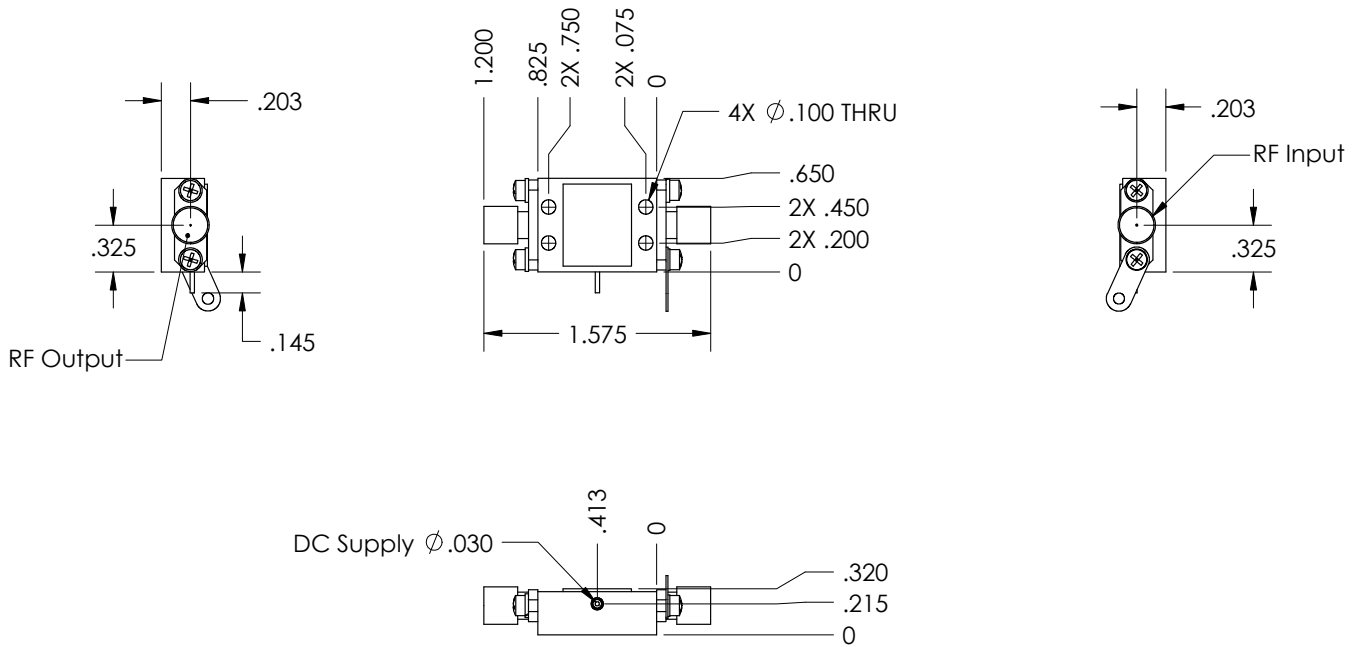


## XK-3

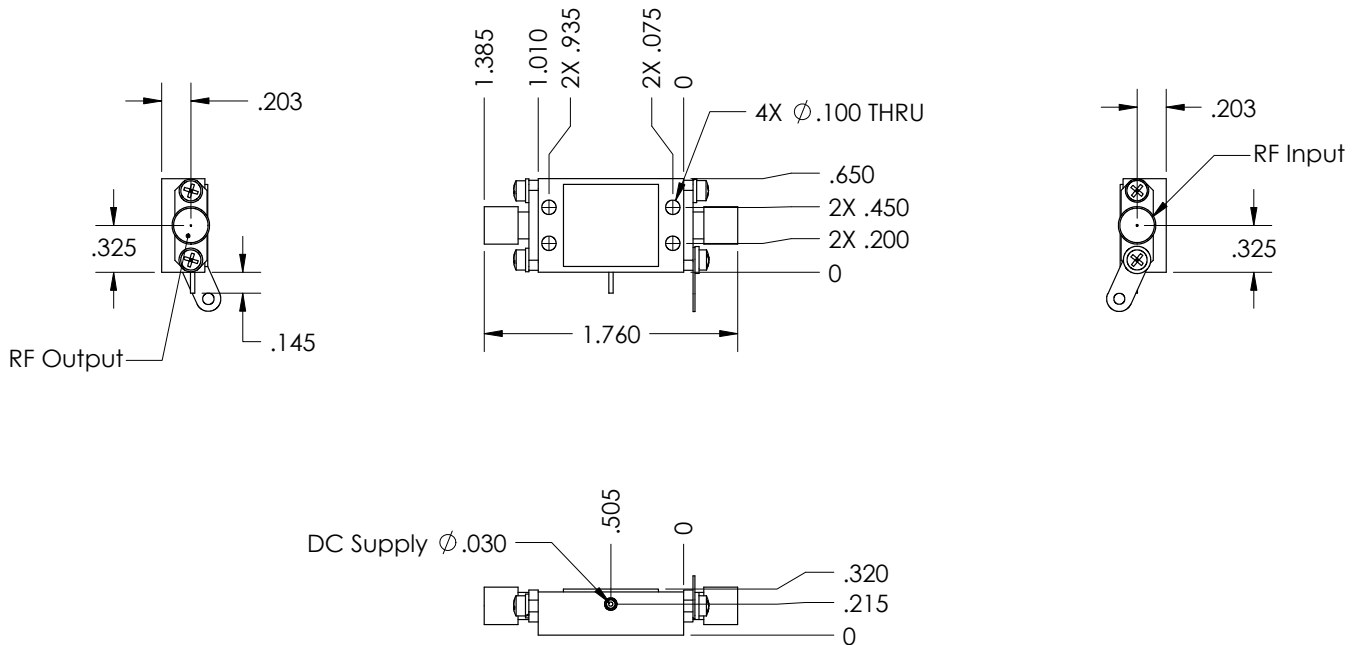


Notes:

- 1) Drawings not to scale
- 2) Ground, Supply Voltage are solderable terminals
- 3) RF connectors are field replaceable SMA female
- 4) Dimensions are subject to change in the interest of improved product performance

## XK-4

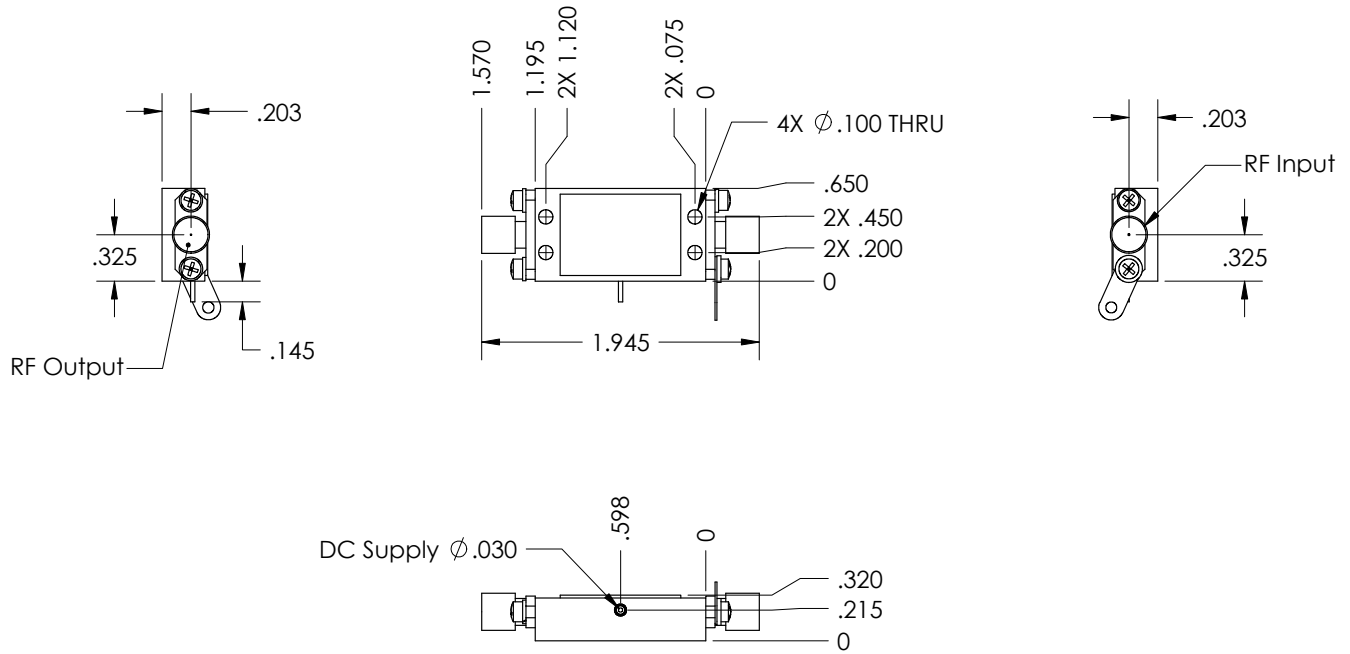

## XK-5

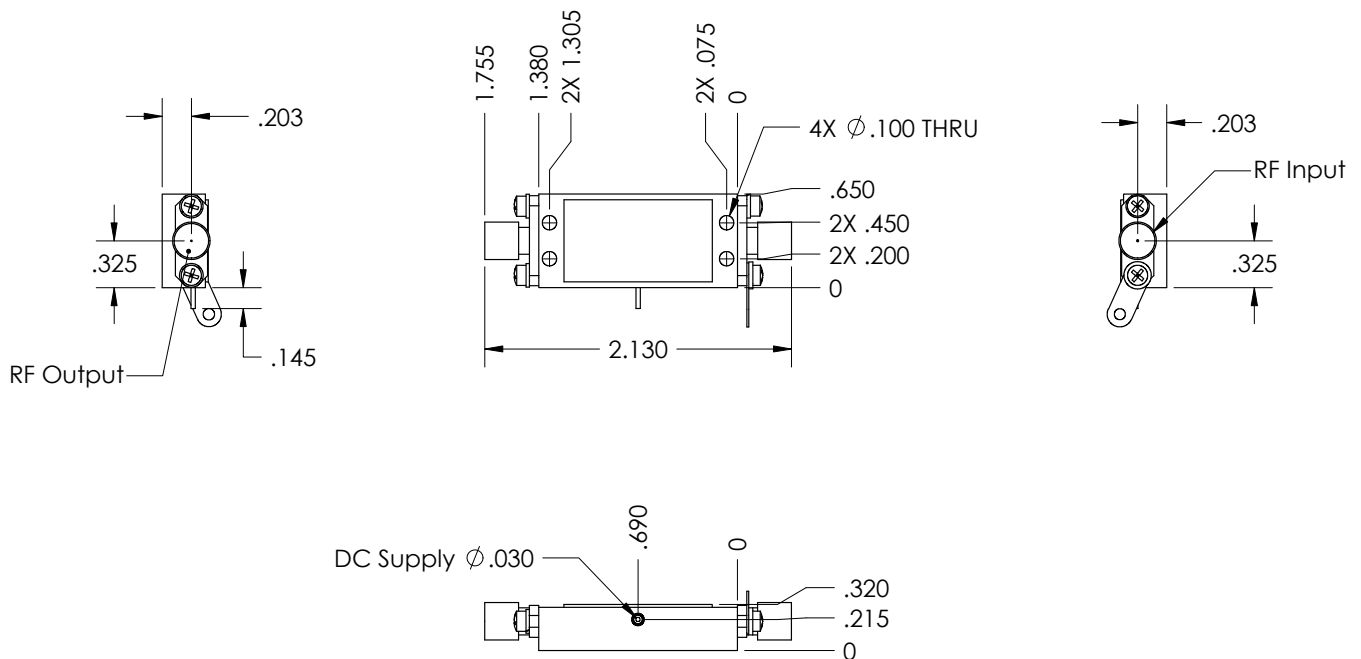

Notes:

- 1) Drawings not to scale
- 2) Ground, Supply Voltage are solderable terminals
- 3) RF connectors are field replaceable SMA female
- 4) Dimensions are subject to change in the interest of improved product performance



SUNSTAR商斯达实业集团是集研发、生产、工程、销售、代理经销、技术咨询、信息服务等为一体的高科技企业，是专业高科技电子产品生产厂家，是具有10多年历史的专业电子元器件供应商，是中国最早和最大的仓储式连锁规模经营大型综合电子零部件代理分销商之一，是一家专业代理和分销世界各大品牌IC芯片和电子元器件的连锁经营综合性国际公司。在香港、北京、深圳、上海、西安、成都等全国主要电子市场设有直属分公司和产品展示展销窗口门市部专卖店及代理分销商，已在全国范围内建成强大统一的供货和代理分销网络。我们专业代理经销、开发生产电子元器件、集成电路、传感器、微波光电元器件、工控机/DOC/DOM电子盘、专用电路、单片机开发、MCU/DSP/ARM/FPGA软件硬件、二极管、三极管、模块等，是您可靠的一站式现货配套供应商、方案提供商、部件功能模块开发配套商。专业以现代信息产业（计算机、通讯及传感器）三大支柱之一的传感器为主营业务，专业经营各类传感器的代理、销售生产、网络信息、科技图书资料及配套产品设计、工程开发。我们的专业网站——中国传感器科技信息网（全球传感器数据库）[www.SENSOR-IC.COM](http://www.SENSOR-IC.COM) 服务于全球高科技生产商及贸易商，为企业科技产品开发提供技术交流平台。欢迎各厂商互通有无、交换信息、交换链接、发布寻求代理信息。欢迎国外高科技传感器、变送器、执行器、自动控制产品厂商介绍产品到中国，共同开拓市场。本网站是关于各种传感器-变送器-仪器仪表及工业自动化大型专业网站，深入到工业控制、系统工程计 测量、自动化、安防报警、消费电子等众多领域，把最新的传感器-变送器-仪器仪表买卖信息，最新技术供求，最新采购商，行业动态，发展方向，最新的技术应用和市场资讯及时的传递给广大科技开发、科学研究、产品设计人员。本网站已成功为石油、化工、电力、医药、生物、航空、航天、国防、能源、冶金、电子、工业、农业、交通、汽车、矿山、煤炭、纺织、信息、通信、IT、安防、环保、印刷、科研、气象、仪器仪表等领域从事科学研究、产品设计、开发、生产制造的科技人员、管理人员、和采购人员提供满意服务。我们公司专业生产、代理、经销、销售各种传感器、变送器、敏感元器件、开关、执行器、仪器仪表、自动化控制系统：专业从事设计、生产、销售各种传感器、变送器、各种测控仪表、热工仪表、现场控制器、计算机控制系统、数据采集系统、各类环境监控系统、专用控制系统应用软件以及嵌入式系统开发及应用等工作。如热敏电阻、压敏电阻、温度传感器、温度变送器、湿度传感器、湿度变送器、气体传感器、气体变送器、压力传感器、压力变送、称重传感器、物（液）位传感器、物（液）位变送器、流量传感器、流量变送器、电流（压）传感器、溶氧传感器、霍尔传感器、图像传感器、超声波传感器、位移传感器、速度传感器、加速度传感器、扭距传感器、红外传感器、紫外传感器、火焰传感器、激光传感器、振动传感器、轴角传感器、光电传感器、接近传感器、干簧管传感器、继电器传感器、微型电泵、磁敏（阻）传感器、压力开关、接近开关、光电开关、色标传感器、光纤传感器、齿轮测速传感器、时间继电器、计数器、计米器、温控仪、固态继电器、调压模块、电磁铁、电压表、电流表等特殊传感器。同时承接传感器应用电路、产品设计和自动化工程项目。

更多产品请看本公司产品专用销售网站：

商斯达中国传感器科技信息网：<http://www.sensor-ic.com/>

商斯达工控安防网：<http://www.pc-ps.net/>

商斯达电子元器件网：<http://www.sunstare.com/>

商斯达微波光电产品网：[HTTP://www.rfoe.net/](http://www.rfoe.net/)

商斯达消费电子产品网：<http://www.icasic.com/>

商斯达军工产品网：<http://www.junpinic.com/>

商斯达实业科技产品网：<http://www.sunstars.cn/>传感器销售热线：

地址：深圳市福田区福华路福庆街鸿图大厦1602室

电话：0755-83607652 83376489 83376549 83370250 83370251 82500323

传真：0755-83376182 (0) 13902971329 MSN: [SUNS888@hotmail.com](mailto:SUNS888@hotmail.com)

邮编：518033 E-mail: [szss20@163.com](mailto:szss20@163.com) QQ: 195847376

深圳赛格展销部：深圳华强北路赛格电子市场2583号 电话：0755-83665529 25059422

技术支持：0755-83394033 13501568376

欢迎索取免费详细资料、设计指南和光盘；产品凡多，未能尽录，欢迎来电查询。

北京分公司：北京海淀区知春路132号中发电子大厦3097号

TEL: 010-81159046 82615020 13501189838 FAX: 010-62543996

上海分公司：上海市北京东路668号上海赛格电子市场D125号

TEL: 021-28311762 56703037 13701955389 FAX: 021-56703037

西安分公司：西安高新开发区20所(中国电子科技集团导航技术研究所)

西安劳动南路88号电子商城二楼D23号

TEL: 029-81022619 13072977981 FAX:029-88789382