


SS0109

WIDE RANGE TEMPERATURE **-20°C (-4°F) to +200°C (+392°F)**

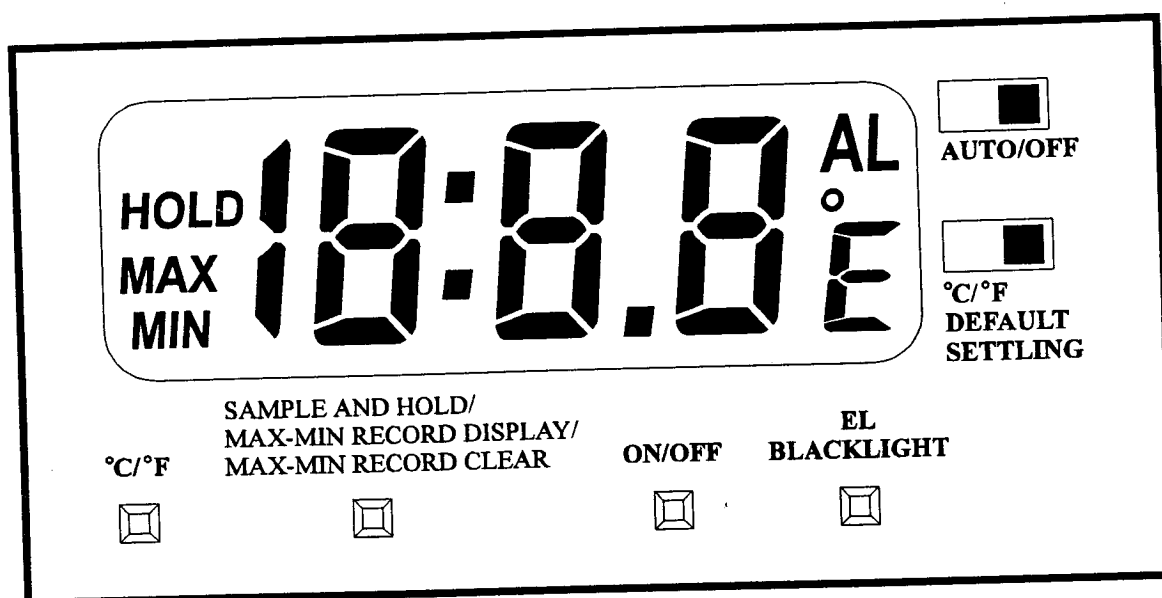

Features:

- 1.5 Volts battery power supply
- Max-Min temperature record display (with data reset)
- seconds sampling rate
- Temperature data hold
- Measure range from -20°C (-4°F) to +200°C (+392°F).

III. Mode Description

3.1. Temperature Mode (Assume using LCD VCD0201-1)

- Full segment-on when power-up
- User can toggle °C/°F by pushing key K₄, the °C/°F status when power-up is selected by K₁. Readings in C at power-up stage will be shown when K₁=0 and readings in °F at power-up stage will be shown when K₁=1.

3.2. Sample and Hold / Max and Min Temperature Record Function

The control keys for sample and hold / max and min temperature record functions are depended on the voltage level of K₃.

For K₃=0

- Sample and hold function activated by pressing S₂ once. Flag “OUT” is shown .
- Maximum temperature value will be displayed by pressing S₂ again. Flag “MAX” is shown *.
- Minimum temperature value will be displayed by pressing S₂ again. Flag “MIN” is shown *.
- Normal temperature reading will resume after pressing S₂ at minimum temperature value stage.

For K₃=0

- Sample and hold function activated by pressing S₁ once. Flag “OUT” is shown *.
- Normal temperature reading will be resume after pressing S₁ again.
- Maximum temperature value will be displayed by pressing S₂ once. Flag “MAX” is shown*.
- Minimum temperature value will be displayed by pressing S₂ again. Flag “MIN” is shown*.
- Normal temperature reading will resume after pressing S₂ at minimum temperature value stage.

I. General Description

SS0109 is a CMOS low power IC specially programmed to detect wide temperature range. Using a special custom made thermistor S258 as sensor, this IC can measure temperature range from -20°C (-4°F) to +200°C (+392°F). Measured temperature is displayed on a 3 ½ digits liquid crystal display.

Application is in cooking thermometer, laboratory thermometer and anywhere when digital temperature measurement with wide range is required.

II. Features

- 1.5 Volts battery power supply
- Max-Min temperature record display and can be reset
- seconds sampling rate
- Temperature data hold


Measure range from -20°C (-4°F) to +200°C (392°F).

- Resolution and range listed below.

Resolution	0.1°C (-19.9°C to 199.9°C)	1.0°C (otherwise)
Accuracy	1.0°C (-10.0°C to +100°C)	2.0°C(otherwise)


- ON/OFF key and Auto-off function to save power
- Support Back Light function
- °C/°F selected by either slide switch or key
- LCD VCD 0101-1 or VCD 0104-1 available from VSL
- Full Segment test

- To reset the max-min temperature record, hold S₂ for 3 seconds at maximum or minimum temperature record stage. The display will show as following.

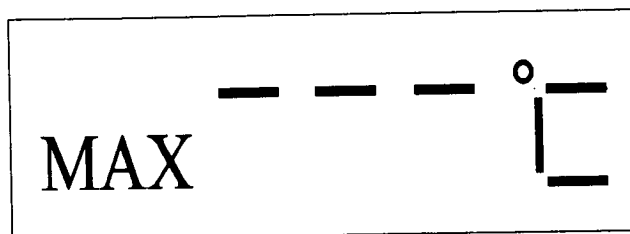

This indicated that the maximum temperature record is cleared and the current temperature is set at the maximum temperature. Minimum temperature record can be cleared similarly.

**Assume LCD VCD0101-1 being used*

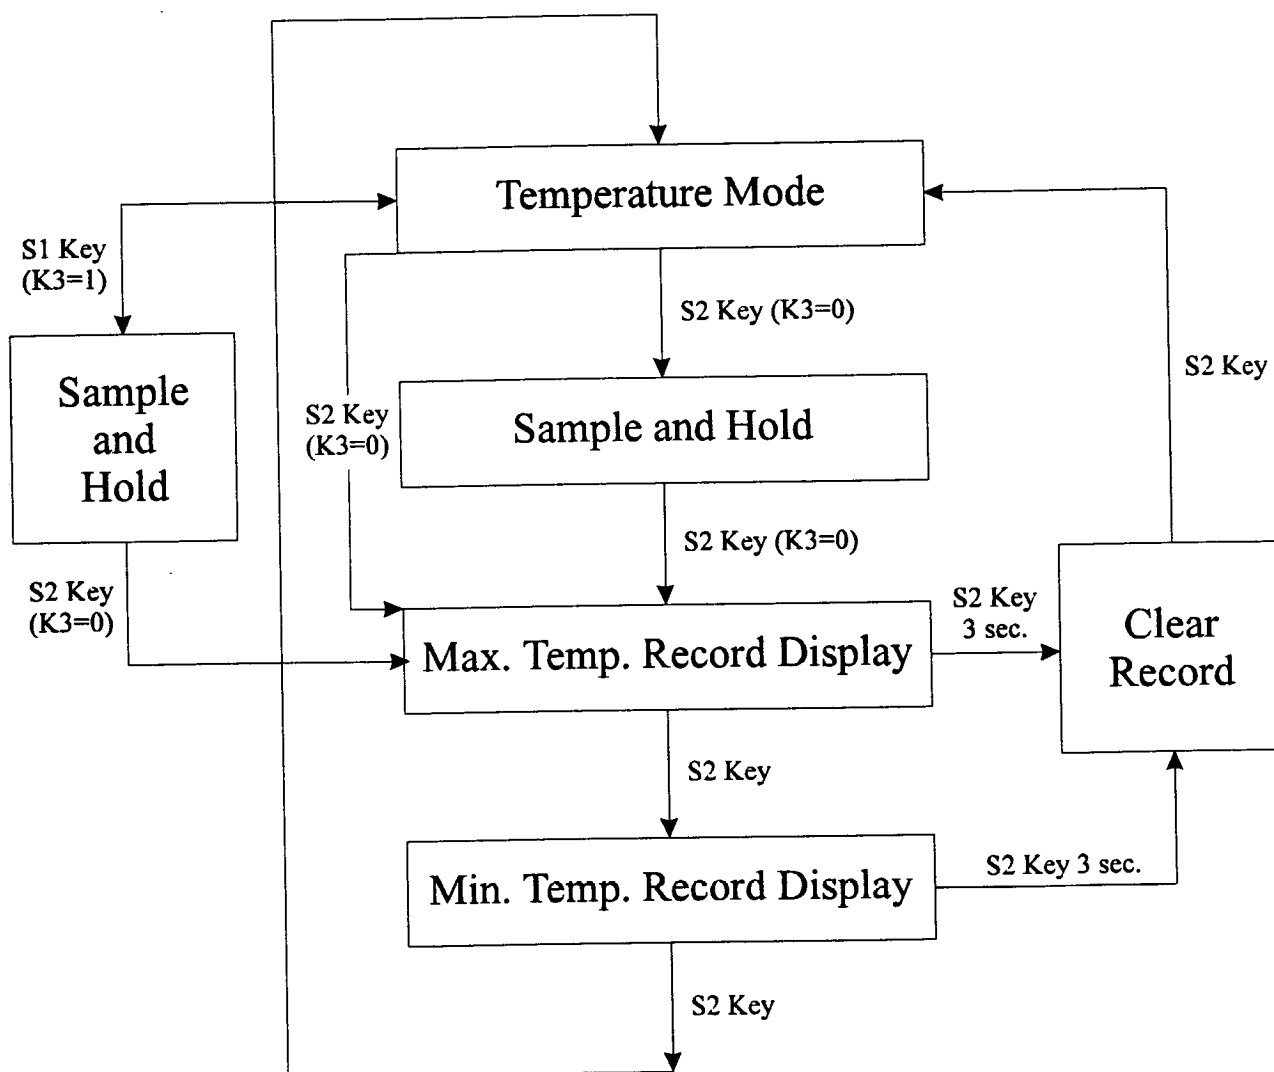

3.3. ON/OFF function

As to save the power consumption, SS0109 can be ON/OFF by toggle the status of S₃.

- If SS0109 is turn ON, the display and temperature sensing will be turn OFF by pressing S₃ once.
- SS0109 will be resumed by pressing S₃ again.

Note : The maximum and minimum record will retain at OFF mode.

3.4. Auto-OFF function

The auto-OFF function activated by K₂. When K₂=1, auto-OFF function is enabled. When temperature change is very small and sampling rate stays in slow mode for 5 minutes, SS0109 turns OFF temperature sensing and display automatically. It will be resumed by pressing S₁, S₂, S₃ or S₄.

Note : When auto-OFF function is enabled (K₂=1). ON/OFF button (S₃) still in function.

3.5. EL Back Light control function

When S₄ is being pressed, EL back light control signal (M₁) will remain high for 5 seconds as to turn on the EL back light module.

IV. Function of Terminals

Terminal	Level	Function
S ₁	-	Sample and hold push button (K ₃ =1)
S ₂	-	Sample and hold (K ₃ =0)/Max-min temp. display/Clear record push button
S ₃	-	ON/OFF push button
S ₄	-	EL back light ON/OFF push button
K ₁	V _{DD} OPEN(V _{SS1})	°F is selected at power up °C is selected at power up
K ₂	V _{DD} OPEN(V _{SS1})	Auto-OFF function enabled Auto-OFF function disabled
K ₃		
K ₄	-	°C/°F push button
M ₁	-	EL back light control signal. M ₁ will remain high for 5 seconds. When key S ₄ being pressed.

V. Logic symbol

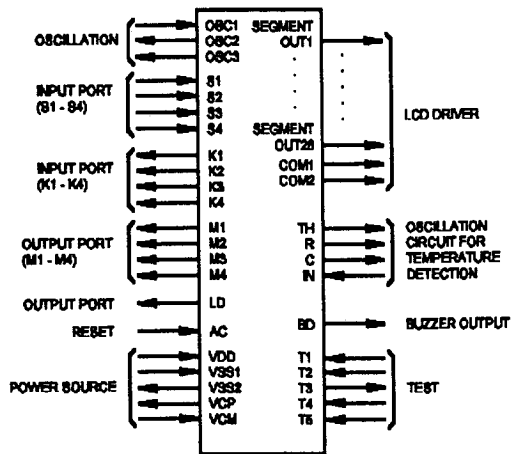


Figure 1.

VI. Chip PAD Layout

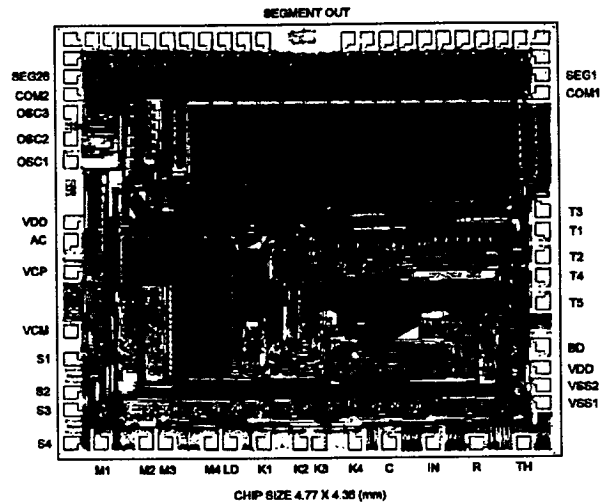


Figure 2.

VII. Pin description

Designation	Function
V _{DD}	Circuit ground potential
V _{SS1}	Power source (-1.5V)
V _{SS2}	Power source for LCD driver (-3.0V) This terminal is connected to V _{DD} terminal through a 0.1μF capacitor
V _{CP} , V _{CM}	Booster capacitor connection terminals V _{CP} terminal is connected to V _{CM} terminal through a 0.1μF capacitor
OSC1, OSC3	Input and output terminals of oscillator inverter. 32.768 kHz crystal is connected to these terminals.
T ₁ ~ T ₅	Terminals to test internal logic, T ₁ ~ T ₃ and T ₅ are pulled down to V _{SS1} . T ₄ is output. Test pins must be normally open.
AC	Terminal to clear internal logic pulled down to V _{SS1} . After power is turned on, the SS0109 must be reset by this terminal.
BD	Buzzer output
TH, R, C, IN	Terminal to CR oscillation circuit for temperature detection, fundamental resistor, thermistor, and capacitor connection terminal.

VIII. PAD Layout


No.	Signal	X	Y
1	S4	-2,230	-2,025
2	M1	-1,940	-2,025
3	M2	-1,510	-2,025
4	M3	-1,330	-2,025
5	M4	-900	-2,025
6	LD	-720	-2,025
7	K1	-400	-2,025
8	K2	-62	-2,025
9	K3	118	-2,025
10	K4	456	-2,025
11	C	778	-2,025
12	IN	1,190	-2,025
13	R	1,600	-2,025
14	TH	2,042	-2,025
15	VSS1	2,230	-1,615
16	VSS2	2,230	-1,435
17	VDD	2,230	-1,225
18	BD	2,230	-1,025
19	T5	2,230	-615
20	T4	2,230	-335
21	T2	2,230	-155
22	T1	2,230	125
23	T3	2,230	305
24	COM1	2,230	1,475
25	SEG1	2,230	1,655
26	SEG2	2,230	1,835
27	SEG3	2,230	2,025
28	SEG4	2,020	2,025
29	SEG5	1,840	2,025
30	SEG6	1,660	2,025
31	SEG7	1,480	2,025
32	SEG8	1,300	2,025
33	SEG9	1,120	2,025
34	NC	940	2,025
35	NC	760	2,025
36	NC	580	2,025
37	NC	400	2,025
38	NC	-400	2,025
39	NC	-580	2,025
40	NC	-760	2,025
41	SEG17	-940	2,025
42	SEG18	-1,120	2,025
43	SEG19	-1,300	2,025
44	SEG20	-1,480	2,025

No.	Signal	X	Y
45	SEG21	-1,660	2,025
46	SEG22	-1,840	2,025
47	SEG23	-2,020	2,025
48	SEG24	-2,230	2,025
49	SEG25	-2,230	1,835
50	SEG26	-2,230	1,655
51	COM2	-2,230	1,475
52	OSC3	-2,230	1,295
53	NC	-2,230	1,033
54	OSC1	-2,230	805
55	VDD	-2,230	205
56	AC	-2,230	25
57	VCP	-2,230	-295
58	VCM	-2,230	-885
59	S1	-2,230	-1,169
60	S2	-2,230	-1,507
61	S3	-2,230	-1,687



Chip size: 4.77 x 4.36 [mm]

PAD size: 110 x 110 [μm]



X. LCD Format (Using VCD0202-1)

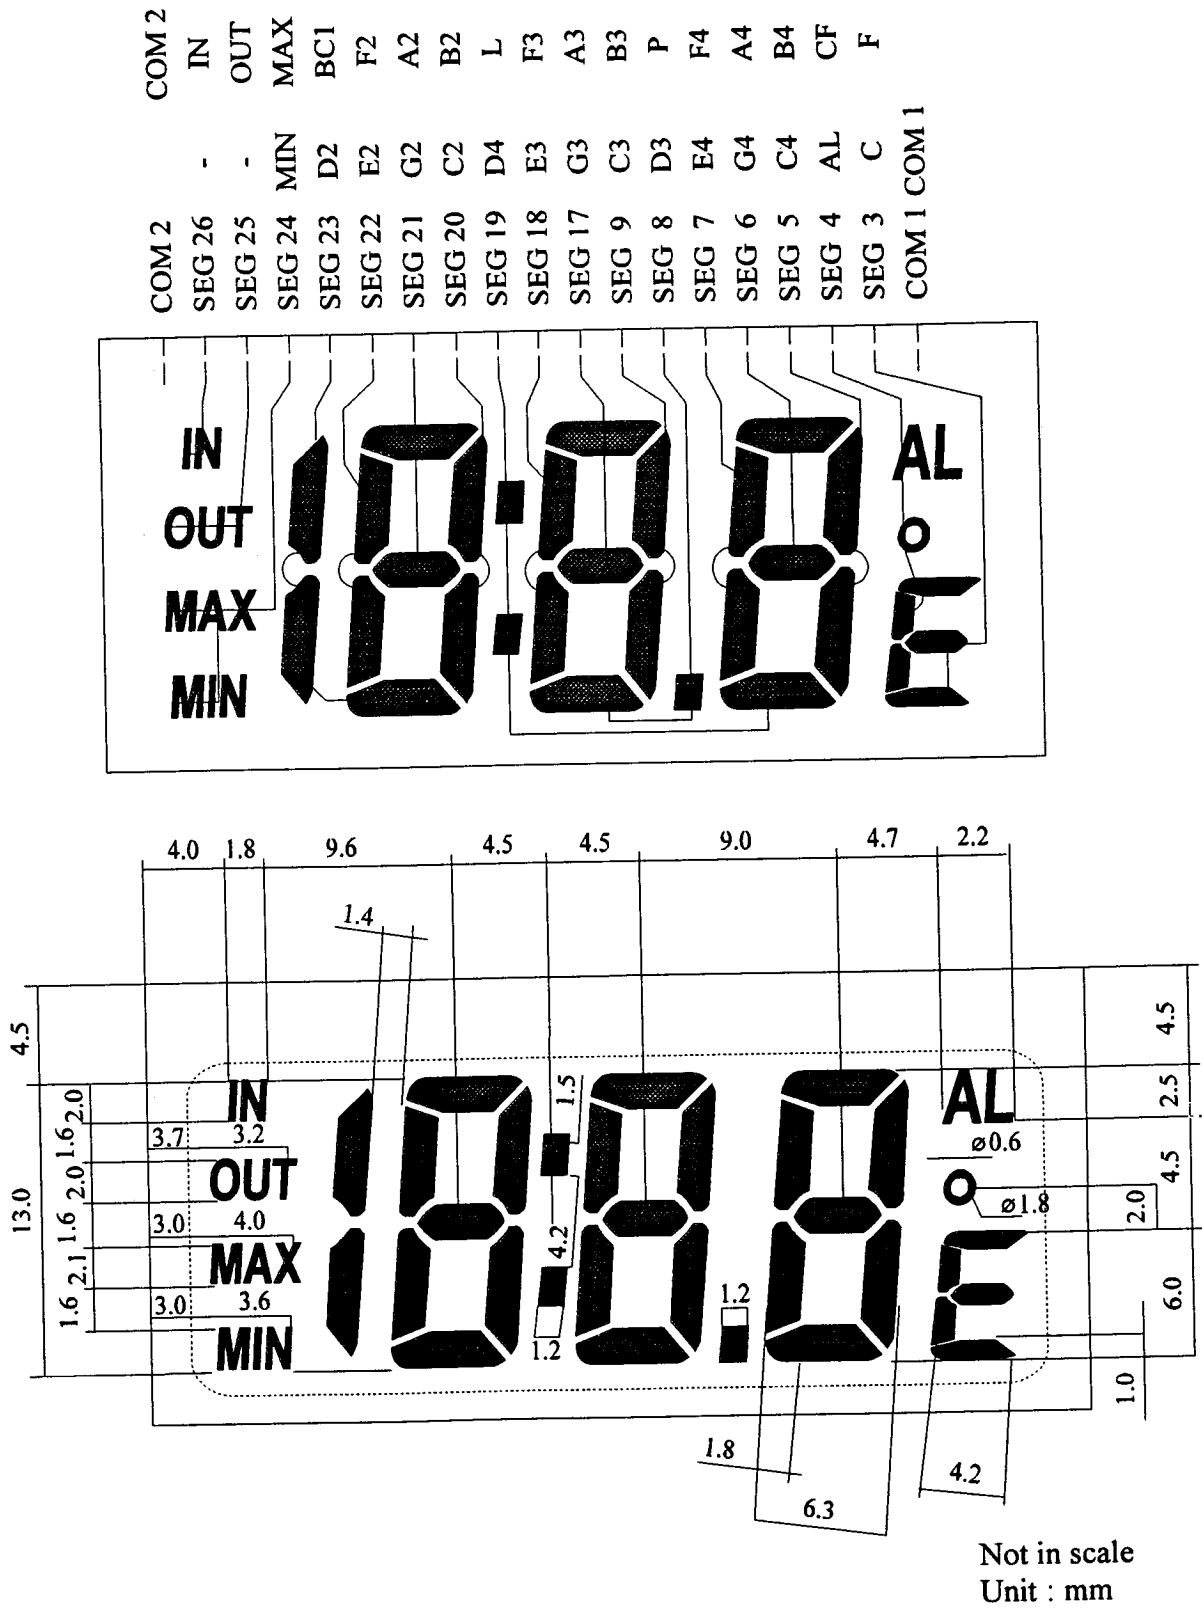


(Using VCD0204-1)

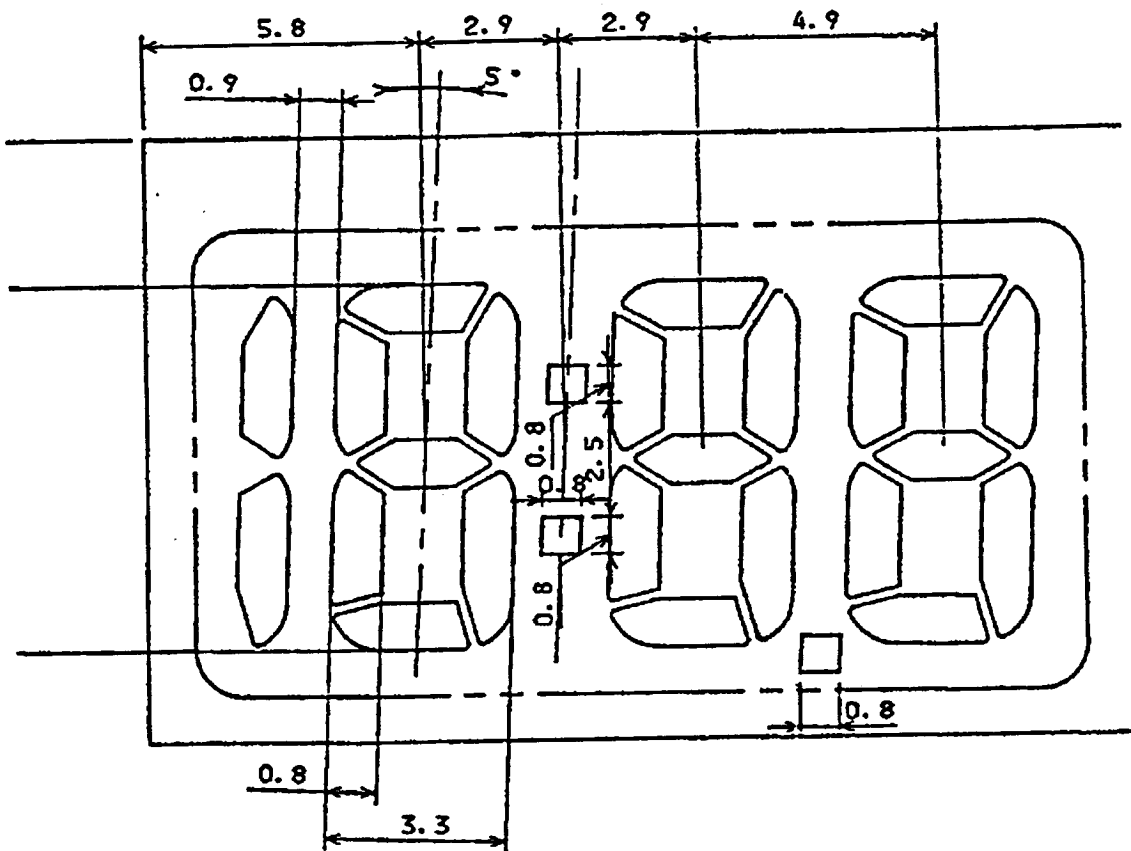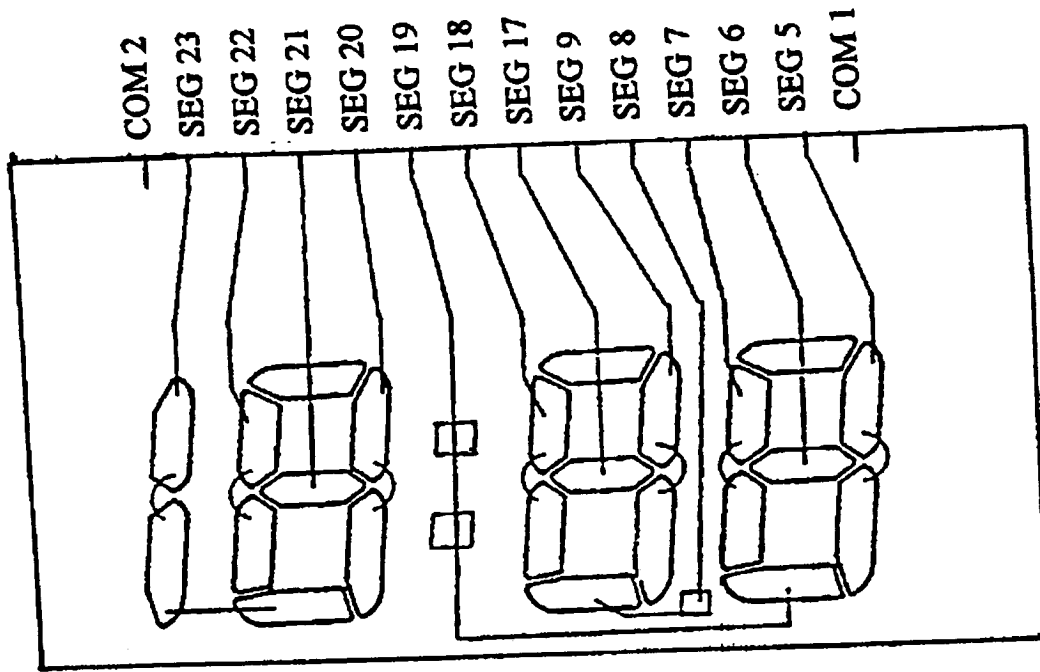

Not in scale
Unit : mm

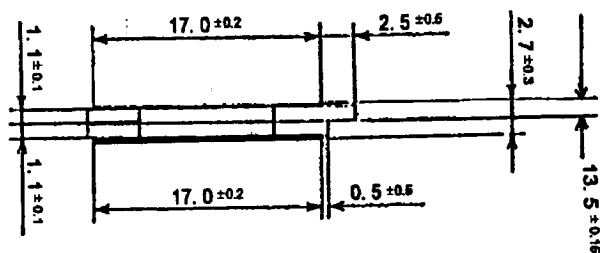

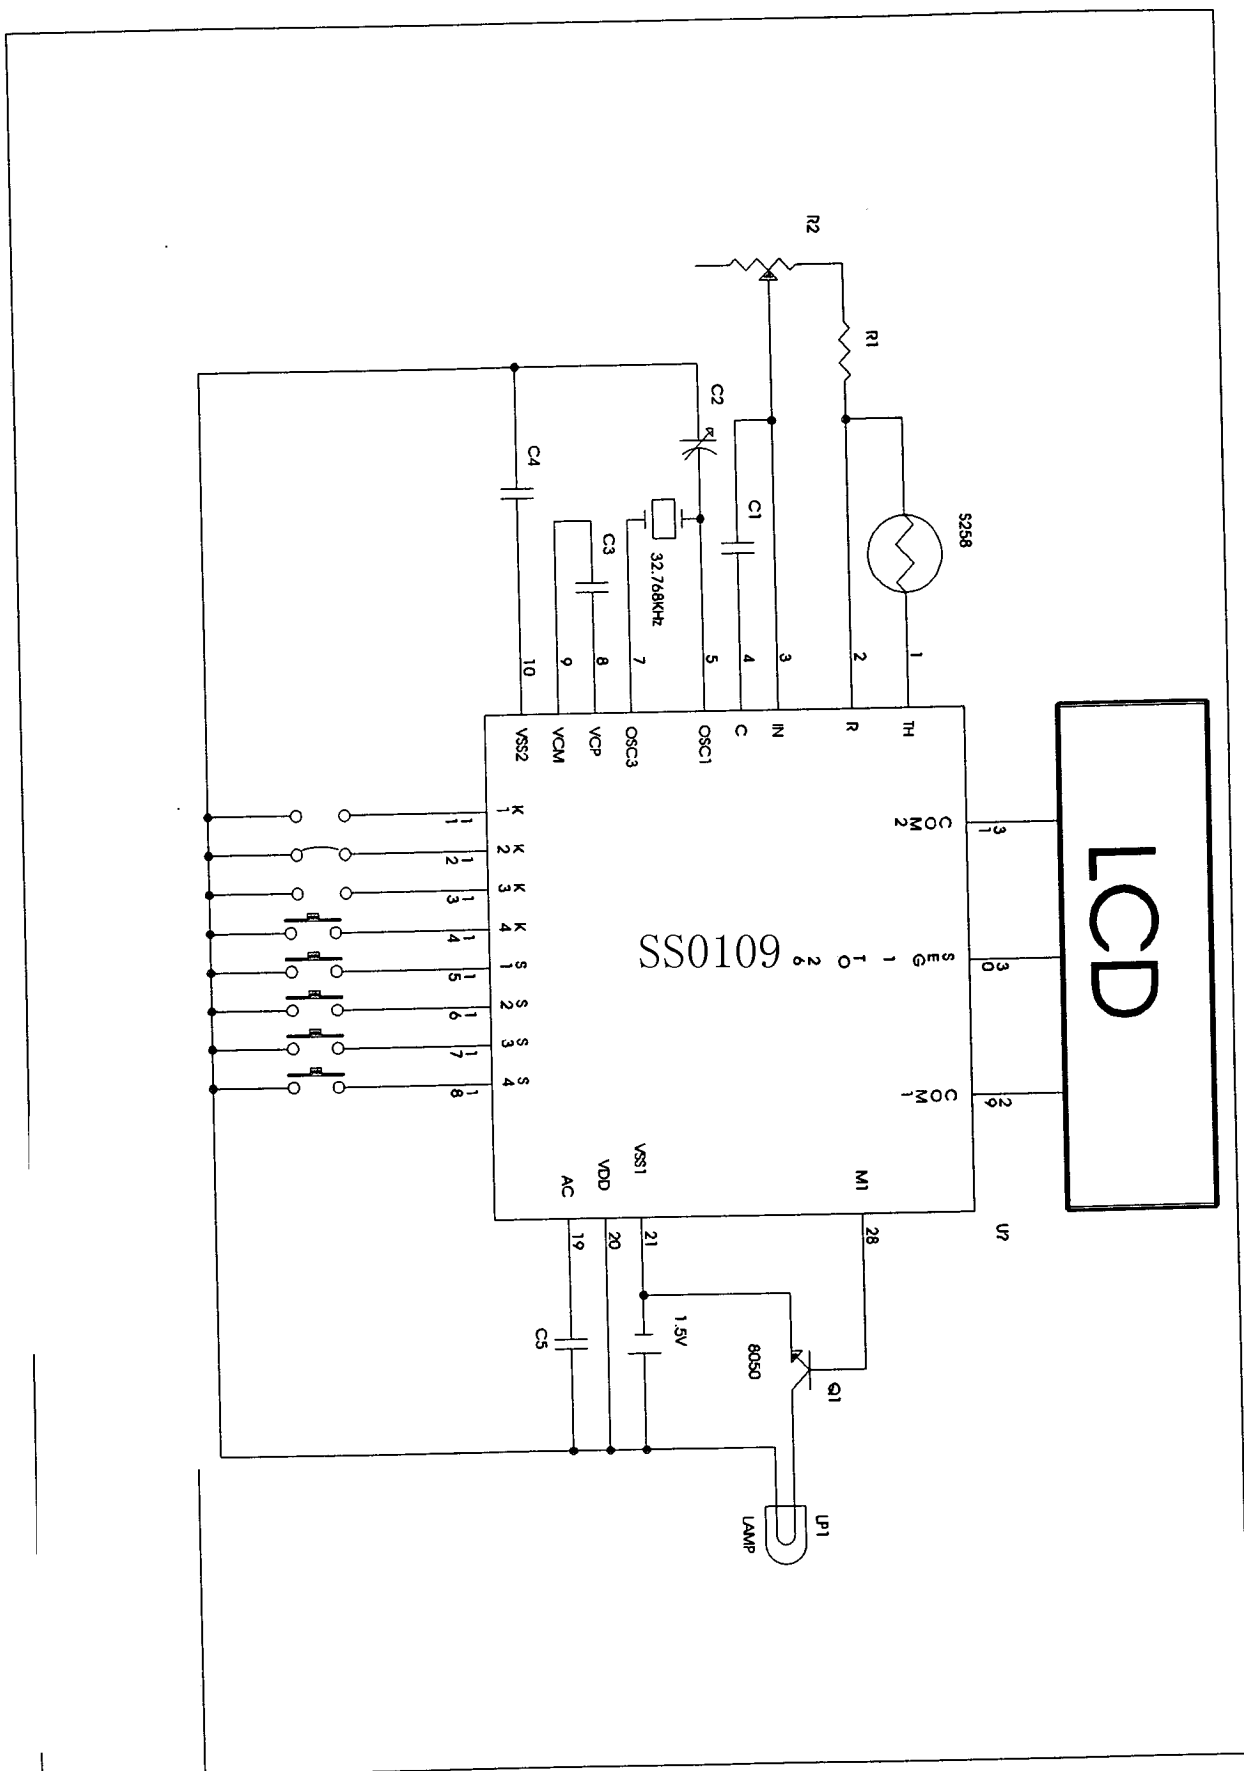

欢迎索取免费详细资料、设计选型指南和光盘、样品；产品繁多未能尽录，欢迎来电查询。

中国传感器科技信息网：[HTTP://WWW.SENSOR-IC.COM/](http://WWW.SENSOR-IC.COM/)

工控安防网：[HTTP://WWW.PC-PS.NET/](http://WWW.PC-PS.NET/)

消费电子专用电路网：[HTTP://WWW.SUNSTARE.COM/](http://WWW.SUNSTARE.COM/)

E-MAIL：xjr5@163.com szss20@163.com

MSN：suns8888@hotmail.com

QQ：195847376

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83376549 83376489 83387030 83387016

传真：0755-83376182 83338339 邮编：518033 手机：(0)13902971329

深圳展销部：深圳华强北路赛格电子市场 2583 号 TEL/FAX：
0755-83665529 25059422

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL：010-81159046 82615020 13501189838 FAX：010-82613476

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL：021-28311762 56703037 13701955389 FAX：021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)
西安劳动南路 88 号电子商城二楼 D23 号

TEL：029-81022619 13072977981 FAX:029-88789382

成都：TEL:(0)13717066236

技术支持：0755-83394033 13501568376