

Sealed Miniature Basic Switch

D2VW

Sealed Miniature Basic Switch Conforms to IP67 (Molded Lead Wire Type Only)

- Use of epoxy resin assures stable sealing, making this switch ideal for places subject to water spray or excessive dust.
- V-series internal mechanism assures high precision and long life.
- Ideal for automobiles, agricultural machines, large-scale home appliances, and industrial equipment, which require high environmental resistance.
- Models available with conformance to safety standards, including UL, CSA and VDE.



Ordering Information

Model Number Legend

D2VW-□□-□□
1 2 3 4

1. Ratings

5: 5 A at 250 VAC
01: 0.1 A at 30 VDC

2. Actuator

None: Pin plunger
L1A: Short hinge lever
L1: Hinge lever
L1B: Long hinge lever
L3: Simulated roller lever
L2A: Short hinge roller lever
L2: Hinge roller lever

3. Contact Form

1: SPDT
2: SPST-NC
3: SPST-NO

4. Terminal

None: Solder/Quick-connect terminals (#187)
(HS for UL and CSA approval.)
M: Molded lead wire (MS for UL and CSA approval)

List of Models

Actuator	Model		
	0.1 A	5 A	
Pin plunger 	Solder and quick-connect terminals (#187)	D2VW-01-1	D2VW-5-1
	Molded lead wire	D2VW-01-1M	D2VW-5-1M
Short hinge lever 	Solder and quick-connect terminals (#187)	D2VW-01L1A-1	D2VW-5L1A-1
	Molded lead wire	D2VW-01L1A-1M	D2VW-5L1A-1M
Hinge Lever 	Solder and quick-connect terminals (#187)	D2VW-01L1-1	D2VW-5L1-1
	Molded lead wire	D2VW-01L1-1M	D2VW-5L1-1M
Long hinge lever 	Solder and quick-connect terminals (#187)	D2VW-01L1B-1	D2VW-5L1B-1
	Molded lead wire	D2VW-01L1B-1M	D2VW-5L1B-1M
Simulated roller lever 	Solder and quick-connect terminals (#187)	D2VW-01L3-1	D2VW-5L3-1
	Molded lead wire	D2VW-01L3-1M	D2VW-5L3-1M
Short hinge roller lever 	Solder and quick-connect terminals (#187)	D2VW-01L2A-1	D2VW-5L2A-1
	Molded lead wire	D2VW-01L2A-1M	D2VW-5L2A-1M
Hinge roller lever 	Solder and quick-connect terminals (#187)	D2VW-01L2-1	D2VW-5L2-1
	Molded lead wire	D2VW-01L2-1M	D2VW-5L2-1M

- Note:**
1. The standard lengths of the molded lead wires (AV0.75f) of models incorporating them are 30 cm.
 2. Contact your OMRON representative for details on SPST-NO and SPST-NC models.
 3. Add "HS" or "MS" to the end of the model number for the UL/CSA-approved version (e.g., D2VW-01-1 → D2VW-01-1HS).

Specifications

■ Ratings

Model	Rated voltage	Non-inductive load				Inductive load	
		Resistive load		Lamp load		Inductive load	
		NC	NO	NC	NO	NC	NO
D2VW-5	125 VAC	5 A		0.5 A		4 A	
	250 VAC	5 A		0.5 A		4 A	
	30 VDC	5 A		3 A		4 A	
	125 VDC	0.4 A		0.1 A		0.4 A	
D2VW-01	125 VAC	0.1 A		---		---	
	30 VDC	0.1 A		---		---	

- Note:**
- The above current ratings are the values of the steady-state current.
 - Inductive load has a power factor of 0.7 min. (AC) and a time constant of 7 ms max. (DC).
 - Lamp load has an inrush current of 10 times the steady-state current.
 - The ratings values apply under the following test conditions:
Ambient temperature: 20±2°C
Ambient humidity: 65±5%
Operating frequency: 30 operations/min

■ Characteristics

Operating speed	0.1 mm to 1 m/s (at pin plunger models)
Operating frequency	Mechanical: 300 operations/min Electrical: 60 operations/min
Insulation resistance	100 MΩ min. (at 500 VDC)
Contact resistance (initial value)	50 mΩ max. (100 mΩ max. for molded lead wire model)
Dielectric strength	1,000 VAC, 50/60 Hz for 1 min between terminals of same polarity 1,500 VAC, 50/60 Hz for 1 min between current-carrying metal parts and ground (see note 1) 1,500 VAC, 50/60 Hz for 1 min between each terminal and non-current-carrying metal parts
Vibration resistance (see note 2)	Malfunction: 10 to 55 Hz, 1.5-mm double amplitude
Shock resistance (see note 2)	Destruction: 400 m/s ² (approx. 40G) max. Malfunction: 300 m/s ² (approx. 30G) max.
Life expectancy (see note 3)	Mechanical: 10,000,000 operations min. Electrical: 100,000 operations min. (1,000,000 operations min. for D2VW-01 models)
Degree of protection	IP67 for molded lead wire model IP50 for terminal model
Degree of protection against electric shock	Class I
Proof tracking index (PTI)	175
Ambient temperature	Operating: -40°C to 90°C (at ambient humidity of 60% max.) (with no icing) (see note 4)
Ambient humidity	Operating: 95% max. (for 5°C to 35°C)
Weight	Approx. 7 g (terminal type pin plunger models)

- Note:**
- The dielectric strength shown in the table indicates the value for models with a Separator.
 - For the pin plunger models, the above values apply for use at both the free position and total travel position. For the lever models, they apply at the total travel position.
 - For testing conditions, consult your OMRON sales representative.
 - The operating temperature of the lead wire (AV0.75f) for the molded lead wire model is between -40°C to 85°C.

■ Approved Standards

UL1054 (File No. E41515)

CSA C22.2 No.55 (File No. LR21642)

Rated voltage	D2VW-5 Models	D2VW-01 Models
125 VAC	3 A	0.1 A
250 VAC	3 A	---
30 VDC	---	0.1 A

VDE/EN61058-1 (IEC61058-1) (File No. 104068)


Rated voltage	D2VW-5 Models	D2VW-01 Models
125 VAC	---	0.1 A
250 VAC	3 A	---

■ Contact Specifications


Item		D2VW-5	D2VW-01
Contact	Specification	Rivet	Crossbar
	Material	Silver alloy	Gold alloy
	Gap (standard value)	0.5 mm	
Inrush current	NC	15 A max.	---
	NO	15 A max.	---
Minimum applicable load		160 mA at 5 VDC	1 mA at 5 VDC

■ Contact Form


SPDT



SPST-NC



SPST-NO



Note: Colors in parentheses indicate lead wire colors.


Dimensions

Note: All units are in millimeters unless otherwise indicated.

■ Terminals

The pin plunger model is shown here as a typical example. Operating characteristics and dimensions of the actuator section are the same as for the molded lead wire models.

■ Mounting Holes





■ Dimensions and Operating Characteristics

- Note:**
- All units are in millimeters unless otherwise indicated.
 - Unless otherwise specified, a tolerance of ± 0.4 mm applies to all dimensions.
 - The operating characteristics are for operation in the A direction (▼).

Pin Plunger

D2VW-01-1
D2VW-5-1

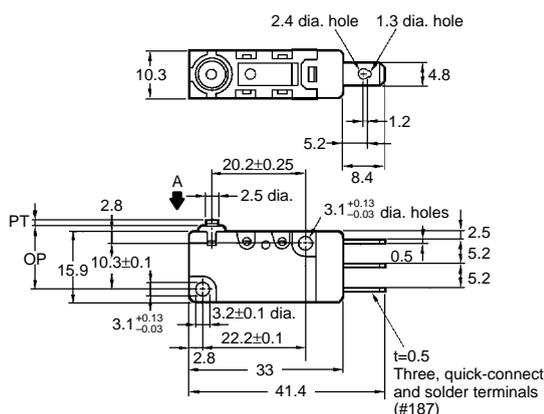



OF max.	1.96 N {200 gf}
RF min.	0.29 N {30 gf}
PT max.	1.2 mm
OT min.	1.0 mm
MD max.	0.4 mm
OP	14.7 ± 0.4 mm

■ Molded Lead Wire Models

Pin Plunger



D2VW-01-1M
D2VW-5-1M

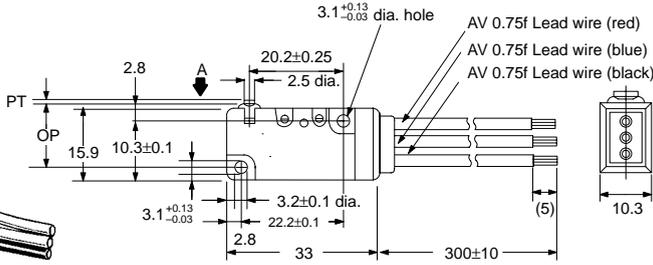

OF max.	1.96 N {200 gf}
RF min.	0.29 N {30 gf}
PT max.	1.2 mm
OT min.	1.0 mm
MD max.	0.4 mm
OP	14.7±0.4 mm

Short Hinge Lever



D2VW-01L1A-1M
D2VW-5L1A-1M

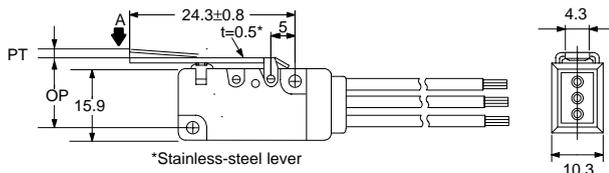

OF max.	1.96 N {200 gf}
RF min.	0.20 N {20 gf}
PT max.	1.6 mm
OT min.	0.8 mm
MD max.	0.5 mm
OP	15.2±0.5 mm

Hinge Lever



D2VW-01L1-1M
D2VW-5L1-1M

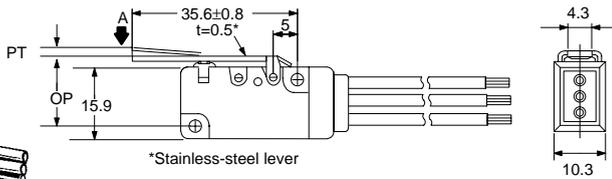

OF max.	1.18 N {120 gf}
RF min.	0.15 N {15 gf}
PT max.	4.0 mm
OT min.	1.6 mm
MD max.	0.8 mm
OP	15.2±1.2 mm

Long Hinge Lever



D2VW-01L1B-1M
D2VW-5L1B-1M

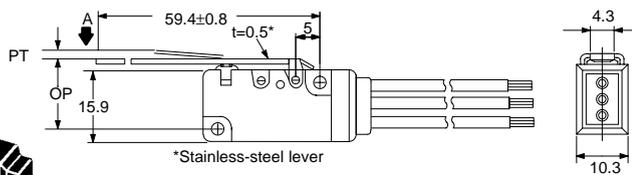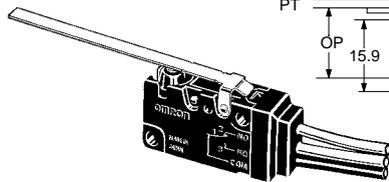

OF max.	0.59 N {60 gf}
RF min.	0.05 N {5 gf}
PT max.	9.0 mm
OT min.	3.2 mm
MD max.	2.0 mm
OP	15.2±2.6 mm

Simulated Roller Lever



D2VW-01L3-1M
D2VW-5L3-1M

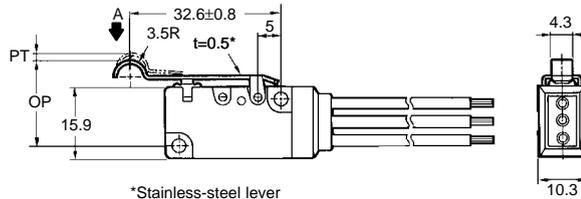

OF max.	1.18 N {120 gf}
RF min.	0.15 N {15 gf}
PT max.	4.0 mm
OT min.	1.6 mm
MD max.	0.8 mm
OP	18.7±1.2 mm

Short Hinge Roller Lever

D2VW-01L2A-1M
D2VW-5L2A-1M

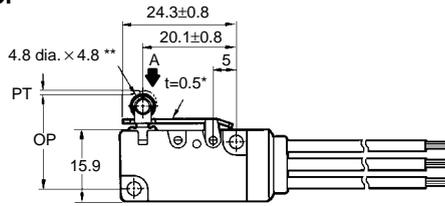



*Stainless-steel lever
**Oil-less polyacetal resin roller



OF max.	2.25 N {230 gf}
RF min.	0.20 N {20 gf}
PT max.	1.6 mm
OT min.	0.8 mm
MD max.	0.5 mm
OP	20.7±0.6 mm

Hinge Roller Lever

D2VW-01L2-1M
D2VW-5L2-1M

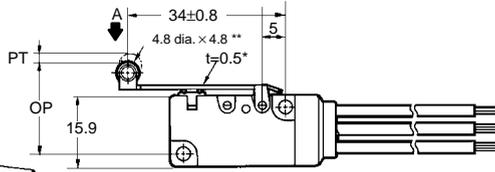

*Stainless-steel lever
**Oil-less polyacetal resin roller



OF max.	1.18 N {120 gf}
RF min.	0.15 N {15 gf}
PT max.	4.0 mm
OT min.	1.6 mm
MD max.	0.8 mm
OP	20.7±1.2 mm

Precautions

Refer to pages 26 to 33 for common precautions.

■ Cautions

Degree of Protection

Do not use the Switch underwater. The Switch was tested and found to meet the conditions necessary to meet the following standard. The test checks for water intrusion after immersion for a specified time period. The test does not check for switching operation underwater.

IEC Publication 529, degree of protection IP67.

Protection Against Chemicals

Prevent the Switch from coming into contact with oil and chemicals. Otherwise, damage to or deterioration of Switch materials may result.


■ Correct Use

Mounting

Use M3 mounting screws with plane washers or spring washers to securely mount the Switch. Tighten the screws to a torque of 0.39 to 0.59 N·m (4 to 6 kgf·cm).

Operation

With the pin plunger models, set the Switch so that the plunger can be pushed in from directly above. Since the plunger is covered with a rubber cap, applying a force from lateral directions may cause damage to the plunger or reduction in the sealing capability.




Handling

Handle the Switch carefully so as not to break the sealing rubber of the plunger.

Using Micro Loads

Using a model for ordinary loads to open or close the contact of a micro load circuit may result in faulty contact. Use models that operate in the following range. However, even when using micro load models within the operating range shown below, if inrush current occurs when the contact is opened or closed, it may increase contact wear and so decrease life expectancy. Therefore, insert a contact protection circuit where necessary.

The minimum applicable load is the N-level reference value. This value indicates the malfunction reference level for the reliability level of 60% ($\lambda 60$). The equation, $\lambda 60 = 0.5 \times 10^{-6}$ /operations indicates that the estimated malfunction rate is less than 1/2,000,000 operations with a reliability level of 60%.

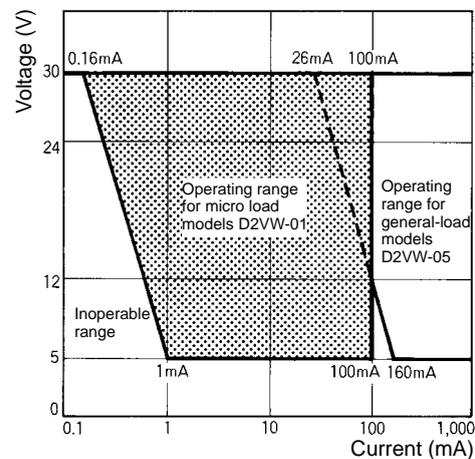

ALL DIMENSIONS SHOWN ARE IN MILLIMETERS.

To convert millimeters into inches, multiply by 0.03937. To convert grams into ounces, multiply by 0.03527.

Cat. No. C095-E1-03B