


NAiS

GU (General Use) Type
[Multi-Channel (4-Channel)
Type]

PhotoMOS RELAYS

FEATURES

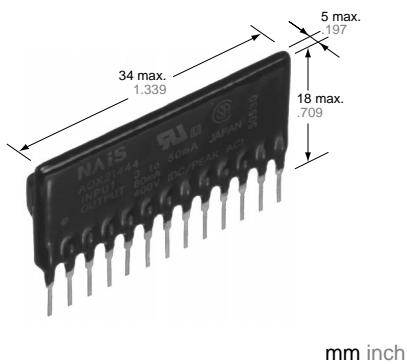

- 1. 4-circuit (4-Form A) of GU**
 PhotoMOS Relay in a compact and slim 13 pin SIL
- 2. Applicable for 4 Form A use, as well as 4 independent 1 Form A**
- 3. Controls low-level analog signals**
 PhotoMOS relays feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.
- 4. Low-level off state leakage current (Typical 100 pA at 100 V load voltage)**
- 5. Optical coupling for extremely high isolation**
- 6. Eliminates the need for a counter electromotive protection diode in the drive circuit on the input side**
- 7. PC board layout is simplified**
- 8. Eliminates the need for a separate power supply to drive the power MOS-FET**
- 9. Low thermal electromotive force (Approx. 1 μ V)**
- 10. No restriction on mounting direction**
- 11. No arc, no bounce, no noise**

TYPICAL APPLICATIONS

- Telecommunication equipment
- High speed inspection machine, Scanner, IC checker
- Robots

TYPES

	Output rating*		Part No.	Packing quantity	
	Load voltage	Load current		Inner case	Outer carton
AC/DC type	400 V	80 mA	AQX21444	20 pcs.	200 pcs.

*Indicate the peak AC and DC values.

RATINGS

1. AC/DC type

1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQX21444	Remarks
Input	LED forward current	I _F	50 mA	
	LED reverse voltage	V _R	3 V	
	Peak forward current	I _{FP}	1 A	f = 100 Hz, Duty factor = 0.1%
	Power dissipation	P _{in}	75 mW	
Output	Load voltage (peak AC)	V _L	400 V	
	Continuous load current	I _L	80 mA (100 mA)	(): in case of using only 1 channel
	Peak load current	I _{peak}	0.3 A	100 ms (1 shot), V _L = DC
	Power dissipation	P _{out}	1,450 mW	
Total power dissipation		P _T	1,500 mW	
I/O isolation voltage		V _{iso}	1,500 V AC	
Temperature limits	Operating	T _{opr}	-40°C to +85°C -40°F to +185°F	Non-condensing at low temperatures
	Storage	T _{stg}	-40°C to +100°C -40°F to +212°F	

2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQX21444	Condition
Input	LED operate current	Typical	I_{Fon}	1.1 mA	$I_L = 80 \text{ mA}$
		Maximum		3 mA	
	LED turn off current	Minimum	I_{Foff}	0.4 mA	$I_L = 80 \text{ mA}$
		Typical		1.0 mA	
Output	LED dropout voltage	Typical	V_F	1.25 V (1.14 V at $I_F = 5 \text{ mA}$)	$I_F = 50 \text{ mA}$
		Maximum		1.5 V	
	On resistance	Typical	R_{on}	30 Ω	$I_F = 5 \text{ mA}$ $I_L = 80 \text{ mA}$ Within 1 s on time
		Maximum		50 Ω	
Transfer characteristics	Off state leakage current	Maximum	I_{Leak}	1 μA	$I_F = 0 \text{ mA}$ $V_L = 400 \text{ V}$
		Typical	T_{on}	0.52 ms	$I_F = 5 \text{ mA}$ $I_L = 80 \text{ mA}$
		Maximum		2 ms	
		Typical		0.29 ms	$I_F = 10 \text{ mA}$ $I_L = 80 \text{ mA}$
		Maximum		1 ms	
	Turn off time*	Typical	T_{off}	0.19 ms	$I_F = 5 \text{ mA or } 10 \text{ mA}$ $I_L = 80 \text{ mA}$
		Maximum		0.5 ms	
	I/O capacitance		C_{iso}	4.0 pF	$f = 1 \text{ MHz}$ $V_B = 0$
				8.0 pF	
Initial I/O isolation resistance			Minimum	R_{iso}	1,000 MΩ
Vibration resistance			Minimum	—	10 to 55 Hz at double amplitude of 3 mm
Shock resistance			Minimum	—	4,900 m/s² {500 G} 1 ms
Note: Recommendable LED forward current $I_F = 5 \text{ mA}$.					2 hours for 3 axes
*Turn on/Turn off time					3 times for 3 axes

Note: Recommendable LED forward current $I_F = 5 \text{ mA}$.


*Turn on/Turn off time

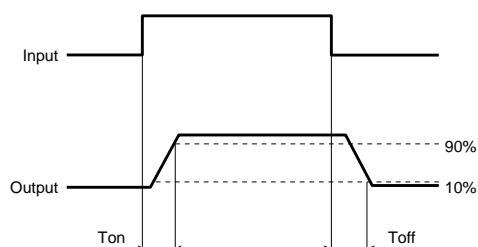

- For Dimensions, see Page 442.
- For Schematic and Wiring Diagrams, see Page 447.
- For Cautions for Use, see Page 449.


REFERENCE DATA

1. Load current vs. ambient temperature characteristics

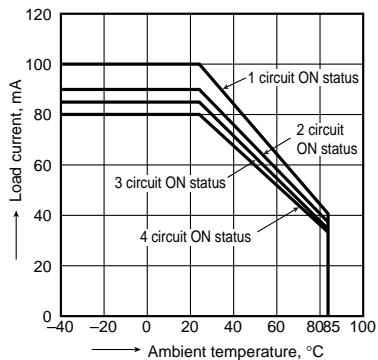Allowable ambient temperature: -40°C to +85°C
-40°F to +185°F


2. Load current in adjacent mounting vs. ambient temperature

Condition: 4 circuits ON status

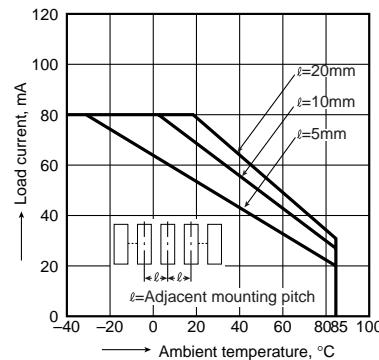


3. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 6 and 7, 8 and 9, 10 and 11, 12 and 13; LED current: 5 mA; Continuous load current: 80 mA (DC)

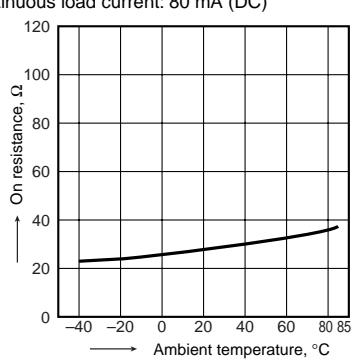


4. Turn on time vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 80 mA (DC)

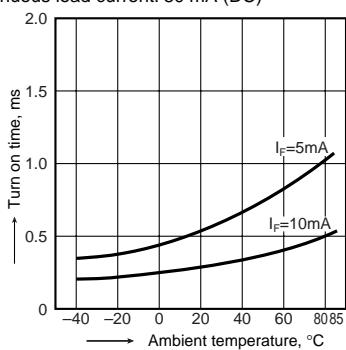


5. Turn off time vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 80 mA (DC)

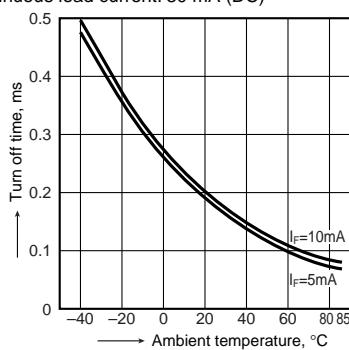


6. LED operate current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 80 mA (DC)

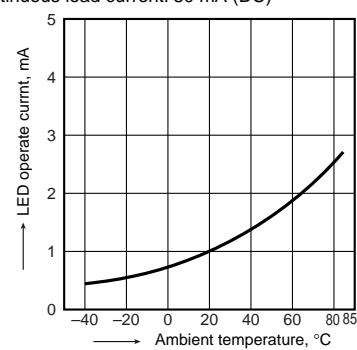


7. LED turn off current vs. ambient temperature characteristics

Load voltage: 400 V (DC);
Continuous load current: 80 mA (DC)

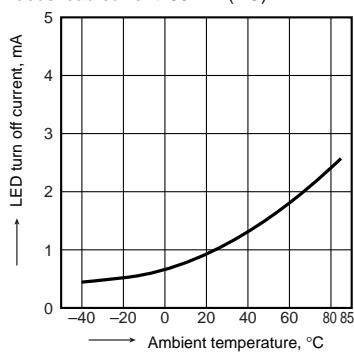


8. LED dropout voltage vs. ambient temperature characteristics

LED current: 5 to 50 mA

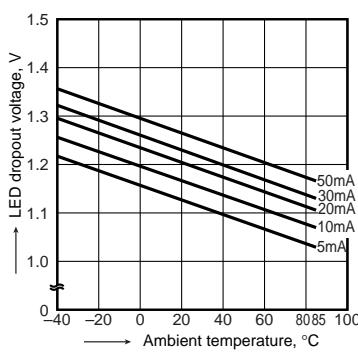


9. Voltage vs. current characteristics of output at MOS portion

Measured portion: between 6 and 7, 8 and 9, 10 and 11, 12 and 13; Ambient temperature: 25°C 77°F

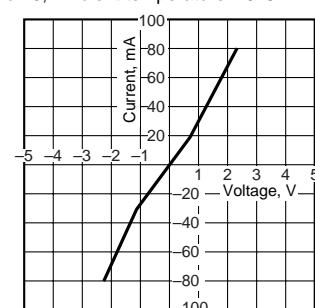


10. Off state leakage current

Measured portion: between terminals 6 and 7, 8 and 9, 10 and 11, 12 and 13;
Ambient temperature: 25°C 77°F

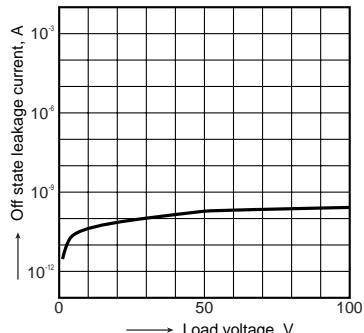


11. LED forward current vs. turn on time characteristics

Measured portion: between terminals 6 and 7, 8 and 9, 10 and 11, 12 and 13; Load voltage: 400 V (DC); Continuous load current: 80 mA (DC); Ambient temperature: 25°C 77°F

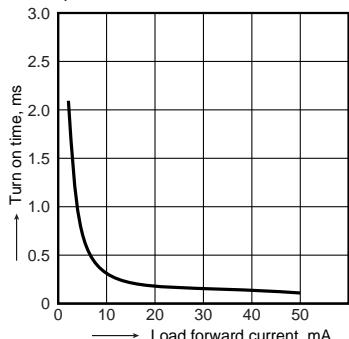

12. LED forward current vs. turn off time characteristics

Measured portion: between terminals 6 and 7, 8 and 9, 10 and 11, 12 and 13; Load voltage: 400 V (DC); Continuous load current: 80 mA (DC); Ambient temperature: 25°C 77°F

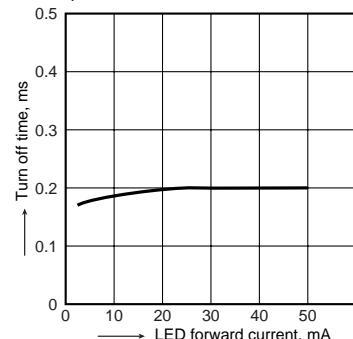

13. Applied voltage vs. output capacitance characteristics (AC/DC type)

Measured portion: between terminals 6 and 7, 8 and 9, 10 and 11, 12 and 13; Load voltage: 400 V (DC); Frequency: 1 MHz; Ambient temperature: 25°C 77°F

