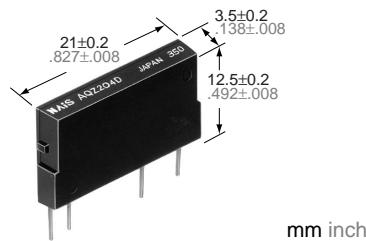


**NAiS****POWER PhotoMOS RELAYS  
(Voltage Sensitive Type)****PhotoMOS  
RELAYS****FEATURES****1. A voltage sensitive power PhotoMOS relay**

Conventional power PhotoMOS relays are connected externally to an input limiting resistor in order to obtain the appropriate

LED current. Adding an internal constant-current element renders the input limiting resistor unnecessary, making it possible for the PhotoMOS relay to be voltage driven.

**2. Wide range of input voltages**

Allows a wide range of input voltages from 4 to 30 V DC. The relay can be used in 5 V, 12 V or 24 V DC systems.

**3. Large capacity PhotoMOS relay**

Supports the various types of load control, from very small loads to a maximum 2.7 A for the AC/DC dual type, 3.6 A for the DC-only type.

**4. Both AC/DC dual types and DC-only types are available**

The AC/DC dual type is capable of bi-directional control, and unlike conventional SSRs, does not have to be used differently depending on the load. The DC-only type is well suited for control of DC solenoids and DC motors.

**5. High sensitivity, low ON resistance**

A maximum 3.6 A load can be controlled with the minimum input voltage of 4 V DC. The ON resistance is also low at 0.09 Ω (AQZ102D).

**6. Small scale, slim type, 4-pin SIL**

Length 21.0 mm×width 3.5 mm×height 12.5 mm. High precision mounting is possible because of the small 73.5mm<sup>2</sup> area of the 4-pin SIL.

**TYPES****1. AC/DC type**

Output rating		Part No.	Packing quantity	
Load voltage	Load current		Inner carton	Outer carton
60 V	2.7 A	AQZ202D	25 pcs.	500 pcs.
100 V	1.8 A			
200 V	0.9 A			
400 V	0.45 A			

**2. DC type**

Output rating		Part No.	Packing quantity	
Load voltage	Load current		Inner carton	Outer carton
60 V	3.6 A	AQZ102D	25 pcs.	500 pcs.
100 V	2.3 A			
200 V	1.1 A			
400 V	0.6 A			

Notes: Load voltage and current of AC/DC type: Peak AC/DC.

Load voltage and current of DC type: DC.

**RATING****1. AC/DC type**

1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item		Symbol	AQZ202D	AQZ205D	AQZ207D	AQZ204D	Remarks
Input	Input voltage	V <sub>IN</sub>		30 V			
	Input reverse voltage	V <sub>RIN</sub>		3 V			
	Power dissipation	P <sub>in</sub>		300 mW			
Output	Load voltage (Peak AC)	V <sub>L</sub>	60 V	100 V	200 V	400 V	
	Continuous load current (Peak AC)	I <sub>L</sub>	2.7 A	1.8 A	0.9 A	0.45 A	
	Peak load current	I <sub>peak</sub>	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), V <sub>L</sub> = DC
	Power dissipation	P <sub>out</sub>		1.6 W			
Total power dissipation		P <sub>T</sub>		1.6 W			
I/O isolation voltage		V <sub>iso</sub>		2,500 V AC			
Temperature limits	Operating	T <sub>opr</sub>	-40°C to +85°C -40°F to +185°F (4 V ≤ V <sub>IN</sub> ≤ 6 V) -40°C to +75°C -40°F to +167°F (6 V < V <sub>IN</sub> ≤ 15 V) -40°C to +60°C -40°F to +140°F (15 V < V <sub>IN</sub> ≤ 30 V)				Non-condensing at low temperatures
	Storage	T <sub>stg</sub>	-40°C to +100°C -40°F to +212°F				

2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQZ202D	AQZ205D	AQZ207D	AQZ204D	Remarks
Input	Operate voltage	Typical	V <sub>Fon</sub>	1.4 V			I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V	
		Maximum		4 V				
	Turn off voltage	Minimum	V <sub>Foff</sub>	0.8 V			I <sub>L</sub> = 100 mA	V <sub>L</sub> = 10 V
		Typical		1.3 V			V <sub>L</sub> = 10 V	
Input current			I <sub>IN</sub>	6.5 mA			V <sub>IN</sub> = 5 V	
Output	On resistance	Typical	R <sub>on</sub>	0.066 Ω	0.180 Ω	0.64 Ω	2.4 Ω	V <sub>IN</sub> = 5 V
		Maximum		0.18 Ω	0.34 Ω	1.1 Ω	3.2 Ω	I <sub>L</sub> = Max. Within 1 s on time
	Off state leakage current	Maximum	I <sub>leak</sub>	10 μA			V <sub>IN</sub> = 0 V <sub>L</sub> = Max.	
Transfer characteristics	Switching speed	Typical	T <sub>on</sub>	5.8 ms	4.2 ms	2.7 ms	2.3 ms	V <sub>IN</sub> = 5 V I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V
		Maximum		10.0 ms				
	Turn off time*	Typical	T <sub>off</sub>	0.2 ms	0.2 ms	0.1 ms	0.1 ms	V <sub>IN</sub> = 5 V I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V
		Maximum		3.0 ms				
	I/O capacitance	Typical	C <sub>iso</sub>	0.8 pF			f = 1 MHz	
		Maximum		1.5 pF			V <sub>B</sub> = 0	
	Initial I/O isolation resistance	Minimum	R <sub>iso</sub>	1,000 MΩ			500 V DC	
Maximum operating speed			—	0.5 cps			V <sub>IN</sub> = 5 V Duty factor = 50% I <sub>L</sub> × V <sub>L</sub> = 200 (VA)	
Vibration resistance			—	10 to 55 Hz at double amplitude of 3 mm			2 hours for 3 axes	
Shock resistance			—	4,900 m/s <sup>2</sup> {500 G} 1 ms			3 times for 3 axes	

Recommendable LED forward current I<sub>F</sub> = 5 to 10 mA.

\*Turn on/off time

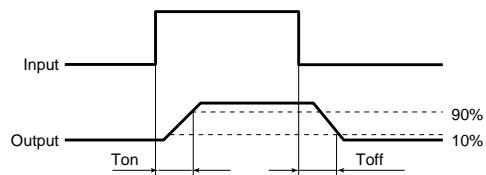

## 2. DC type

### 1) Absolute maximum ratings (Ambient temperature: 25°C 77°F)


Item			Symbol	AQZ102D	AQZ105D	AQZ107D	AQZ104D	Remarks		
Input	Input voltage		V <sub>IN</sub>	30 V						
	Input reverse voltage		V <sub>RIN</sub>	3 V						
	Power dissipation		P <sub>in</sub>	300 mW						
Output	Load voltage (DC)		V <sub>L</sub>	60 V	100 V	200 V	400 V			
	Continuous load current (DC)		I <sub>L</sub>	3.6 A	2.3 A	1.1 A	0.6 A			
	Peak load current		I <sub>peak</sub>	9.0 A	6.0 A	3.0 A	1.5 A	100 ms (1 shot), V <sub>L</sub> = DC		
	Power dissipation		P <sub>out</sub>	1.35 W						
Total power dissipation			P <sub>T</sub>	1.35 W						
I/O isolation voltage			V <sub>iso</sub>	2,500 V AC						
Temperature limits	Operating		T <sub>opr</sub>	-40°C to +85°C -40°C to +75°C -40°C to +60°C			-40°F to +185°F -40°F to +167°F -40°F to +140°F			
	Storage		T <sub>stg</sub>	-40°C to +100°C -40°F to +212°F			(4 V ≤ V <sub>IN</sub> ≤ 6 V) (6 V < V <sub>IN</sub> ≤ 15 V) (15 V < V <sub>IN</sub> ≤ 30 V)			
							Non-condensing at low temperatures			

## 2) Electrical characteristics (Ambient temperature: 25°C 77°F)

Item			Symbol	AQZ102D	AQZ105D	AQZ107D	AQZ104D	Remarks			
Input	Operate voltage		V <sub>Fon</sub>	1.4 V			I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V				
				4 V							
Output	Turn off voltage		V <sub>Foff</sub>	0.8 V			I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V				
				1.3 V							
Input current			I <sub>IN</sub>	6.5 mA			V <sub>IN</sub> = 5 V				
Output	On resistance		R <sub>on</sub>	0.033 Ω	0.090 Ω	0.33 Ω	1.23 Ω	V <sub>IN</sub> = 5 V I <sub>L</sub> = Max. Within 1 s on time			
				0.09 Ω	0.17 Ω	0.55 Ω	1.6 Ω	V <sub>IN</sub> = 0 V <sub>L</sub> = Max.			
Off state leakage current			I <sub>leak</sub>	10 μA							
Transfer characteristics	Switching speed	Turn on time*	T <sub>on</sub>	3.3 ms	2.2 ms	1.5 ms	1.2 ms	V <sub>IN</sub> = 5 V I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V			
				10.0 ms							
	Turn off time*	Typical	T <sub>off</sub>	0.2 ms	0.2 ms	0.1 ms	0.1 ms	V <sub>IN</sub> = 5 V I <sub>L</sub> = 100 mA V <sub>L</sub> = 10 V			
				3.0 ms							
	I/O capacitance		C <sub>iso</sub>	0.8 pF			f = 1 MHz V <sub>B</sub> = 0				
				1.5 pF							
Initial I/O isolation resistance			R <sub>iso</sub>	1,000 MΩ			500 V DC				
Maximum operating speed			—	0.5 cps			V <sub>IN</sub> = 5 V Duty factor = 50% I <sub>L</sub> × V <sub>L</sub> = 200 (VA)				
Vibration resistance			Minimum	—			2 hours for 3 axes				
Shock resistance			Minimum	—			4,900 m/s <sup>2</sup> {500 G} 1 ms				
3 times for 3 axes											

Recommendable LED forward current I<sub>F</sub> = 5 to 10 mA.


\*Turn on/off time

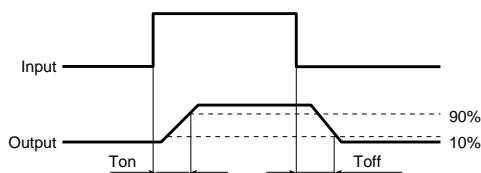


- For Dimensions, see Page 442.
- For Schematic and Wiring Diagrams, see Page 448.
- For Cautions for Use, see Page 453.

## REFERENCE DATA


## 1. Load current vs. ambient temperature characteristics

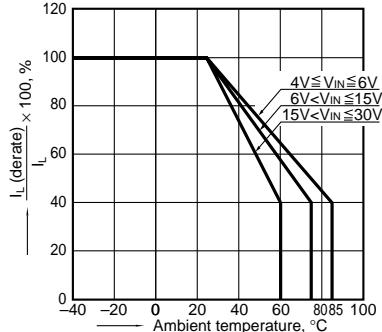Allowable ambient temperature: -40°C to +85°C  
-40°F to +185°F;V<sub>IN</sub>: Input voltage; I<sub>L</sub> (derate): Load current (derate); I<sub>L</sub>: Absolute maximum ratings of continuous load current

## 2.-1) Load current vs. ambient temperature characteristics in adjacent mounting

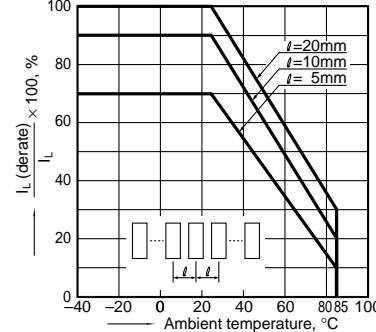
Input voltage: 4V ≤ V<sub>IN</sub> ≤ 6V;  
I<sub>L</sub> (derate): Load current (derate); I<sub>L</sub>: Absolute maximum ratings of continuous load current; l: Adjacent mounting pitch

## 2.-2) Load current vs. ambient temperature characteristics in adjacent mounting

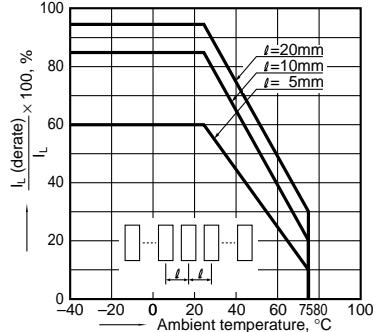Input voltage: 6V < V<sub>IN</sub> ≤ 15V;  
I<sub>L</sub> (derate): Load current (derate); I<sub>L</sub>: Absolute maximum ratings of continuous load current; l: Adjacent mounting pitch

**2.(3) Load current vs. ambient temperature characteristics in adjacent mounting**

Input voltage:  $15V < V_{IN} \leq 30V$ ;  
 $I_L$  (derate): Load current (derate);  $I_L$ : Absolute maximum ratings of continuous load current;  $\ell$ : Adjacent mounting pitch

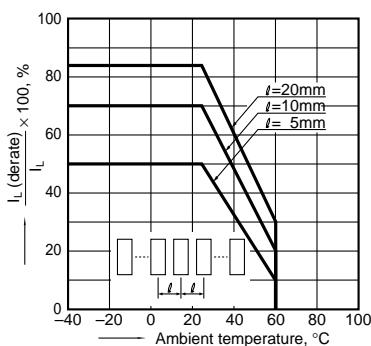

**3.(1) On resistance vs. ambient temperature characteristics (AC/DC type)**



Input voltage: 5 V;  
 Continuous load current: 2.7 A (DC) (AQZ202D)  
 1.8 A (DC) (AQZ205D)

**3.(2) On resistance vs. ambient temperature characteristics (AC/DC type)**

Input voltage: 5 V;  
 Continuous load current: 0.9 A (DC) (AQZ207D)  
 0.45 A (DC) (AQZ204D)


**3.(1) On resistance vs. ambient temperature characteristics (AC/DC type)**

Input voltage: 5 V;  
 Continuous load current: 0.9 A (DC) (AQZ207D)  
 0.45 A (DC) (AQZ204D)

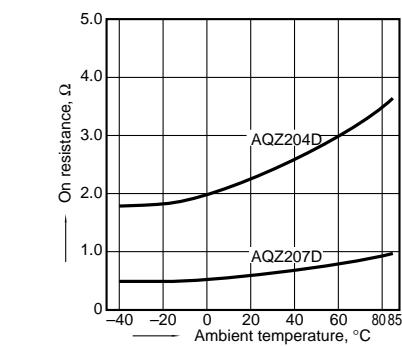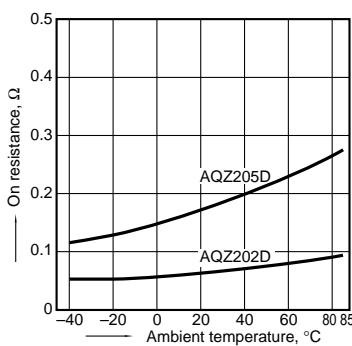


**3.(3) On resistance vs. ambient temperature characteristics (DC type)**

Input voltage: 5 V;  
 Continuous load current: 3.6 A (DC) (AQZ102D)  
 2.3 A (DC) (AQZ105D)

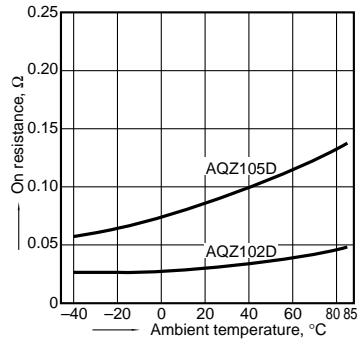


**3.(4) On resistance vs. ambient temperature characteristics (DC type)**

Input voltage: 5 V;  
 Continuous load current: 1.1 A (DC) (AQZ107D)  
 0.6 A (DC) (AQZ104D)

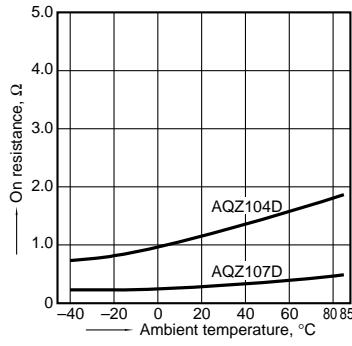


**4.(1) Turn on time vs. ambient temperature characteristics (AC/DC type)**

Input voltage: 5 V;  
 Load voltage: 10 V (DC);  
 Continuous load current: 100 mA (DC)

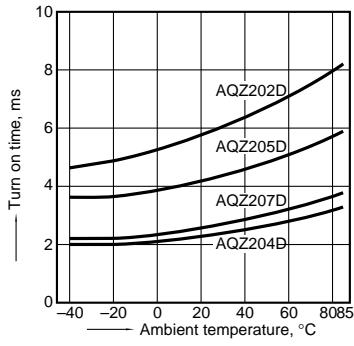


**4.(2) Turn on time vs. ambient temperature characteristics (DC type)**

Input voltage: 5 V; Load voltage: 10 V (DC);  
 Continuous load current: 100 mA (DC)

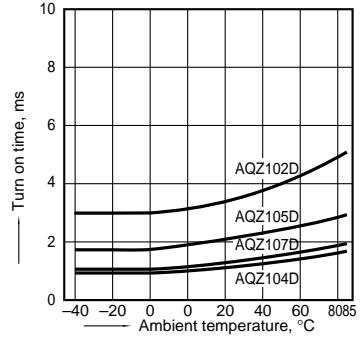


**5.(1) Turn off time vs. ambient temperature characteristics (AC/DC type)**

Input voltage: 5 V; Load voltage: 10 V (DC);  
 Continuous load current: 100 mA (DC)

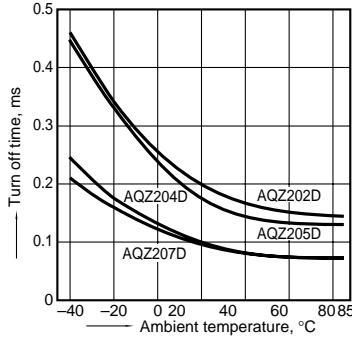


**5.(2) Turn off time vs. ambient temperature characteristics (DC type)**

Input voltage: 5 V; Load voltage: 10 V (DC);  
 Continuous load current: 100 mA (DC)

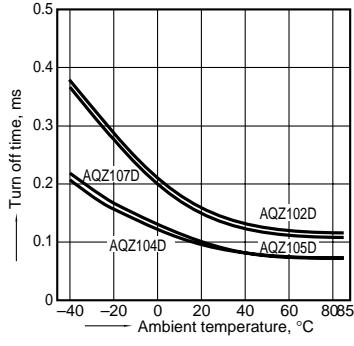


**6. Operate voltage vs. ambient temperature characteristics**

Load voltage: 10 V (DC);  
 Continuous load current: 100 mA (DC)

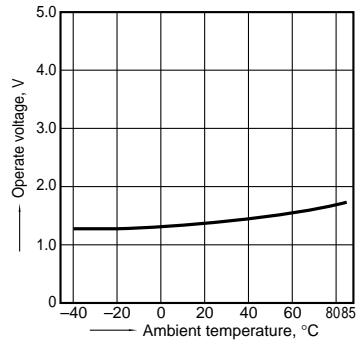


**7. Turn off voltage vs. ambient temperature characteristics**

Load voltage: 10 V (DC);  
 Continuous load current: 100 mA (DC)

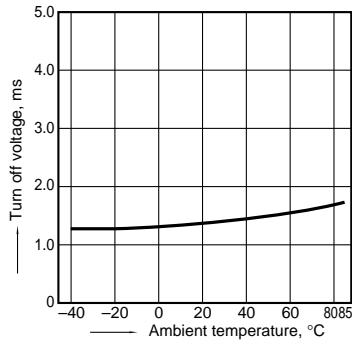


**8. Input current vs. ambient temperature characteristics**


Input voltage: 5 V

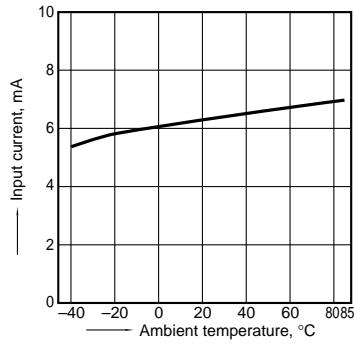


9.-1) Voltage vs. current characteristics of output at MOS portion (AC/DC type)  
Ambient temperature: 25°C 77°F

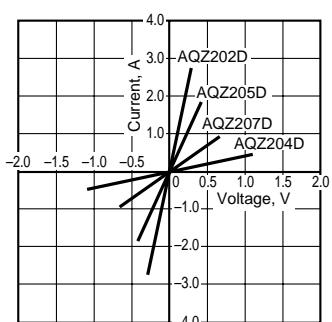


9.-2) Voltage vs. current characteristics of output at MOS portion (DC type)  
Ambient temperature: 25°C 77°F

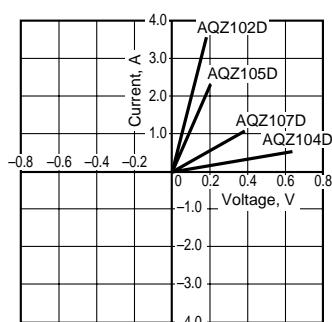


10. Input voltage vs. input current characteristics  
Ambient temperature: 25°C 77°F

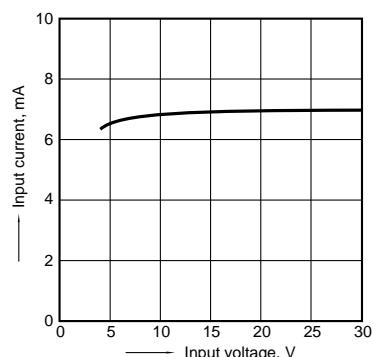


11.-1) Off state leakage current  
Ambient temperature: 25°C 77°F

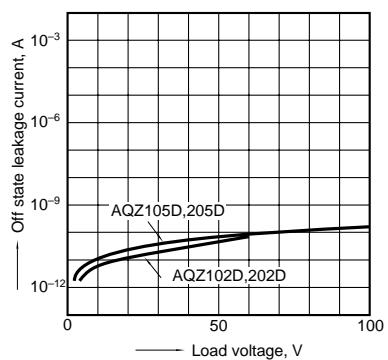


11.-2) Off state leakage current  
Ambient temperature: 25°C 77°F

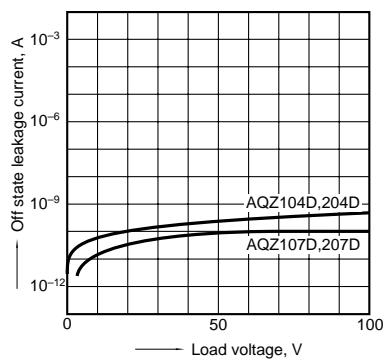


12. Maximum operating speed vs. load voltage × load current characteristics  
Input voltage: 5V; Ambient temperature: 25°C 77°F

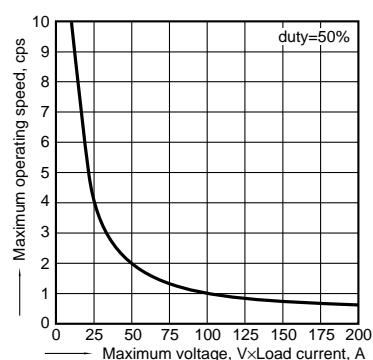

13.-1) Applied voltage vs. output capacitance characteristics (AC/DC type)  
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

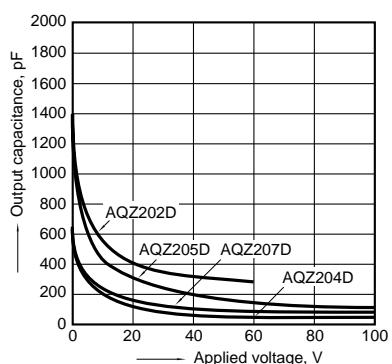


13.-2) Applied voltage vs. output capacitance characteristics (DC type)  
Frequency: 1 MHz; Ambient temperature: 25°C 77°F

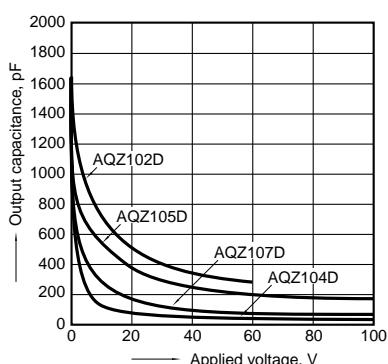


## ACCESSORY

### Socket

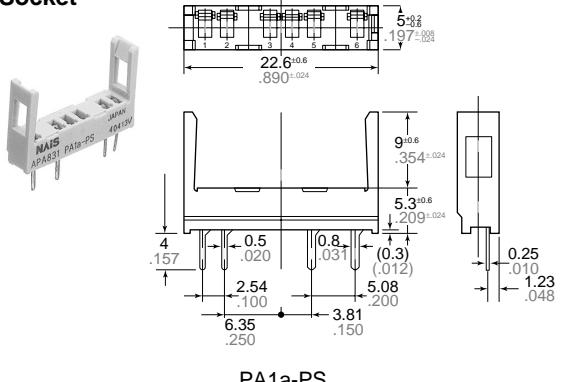


PA1a-PS

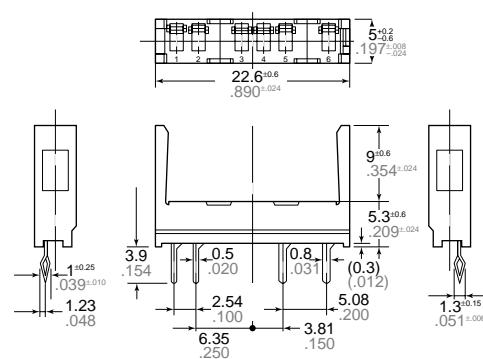


PA1a-PS-H

mm inch  
PC board pattern  
(BOTTOM VIEW)  
Standard type



Self clinching type

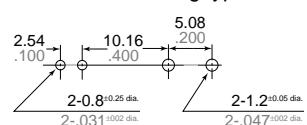

Tolerance: ±0.1 ±0.004