

DRAWING #: AG2401-6

SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szss200163.com

| REV. | DATE | REVISION DESCRIPTION | DR. |
|------|----------|----------------------|------|
| A | 11/07/05 | ECN 2005-102 | L.L. |
| | | | |

ROHS COMPLIANT

NOTES:

1. ELECTRICAL:


- 1.1 CONTACT CAPACITY 24 VOLTS MAX., 0.20 AMPS MAX., 5 VA MAX.
- 1.2 CONTACT RESISTANCE 75 OHMS MAX. AT 5 VOLTS DC

2. OPERATE:

- 2.1 SWITCH MAY BE CLOSED OR OPEN IN ANY STATIONARY POSITION
- 2.2 SWITCH WILL EXHIBIT CHANGE OF STATE UPON MOVEMENT IN ANY POSITION
- 2.3 OPERATING TEMPERATURE -37° C TO 100° C

3. FINISH:

- 3.1 TIN PLATED

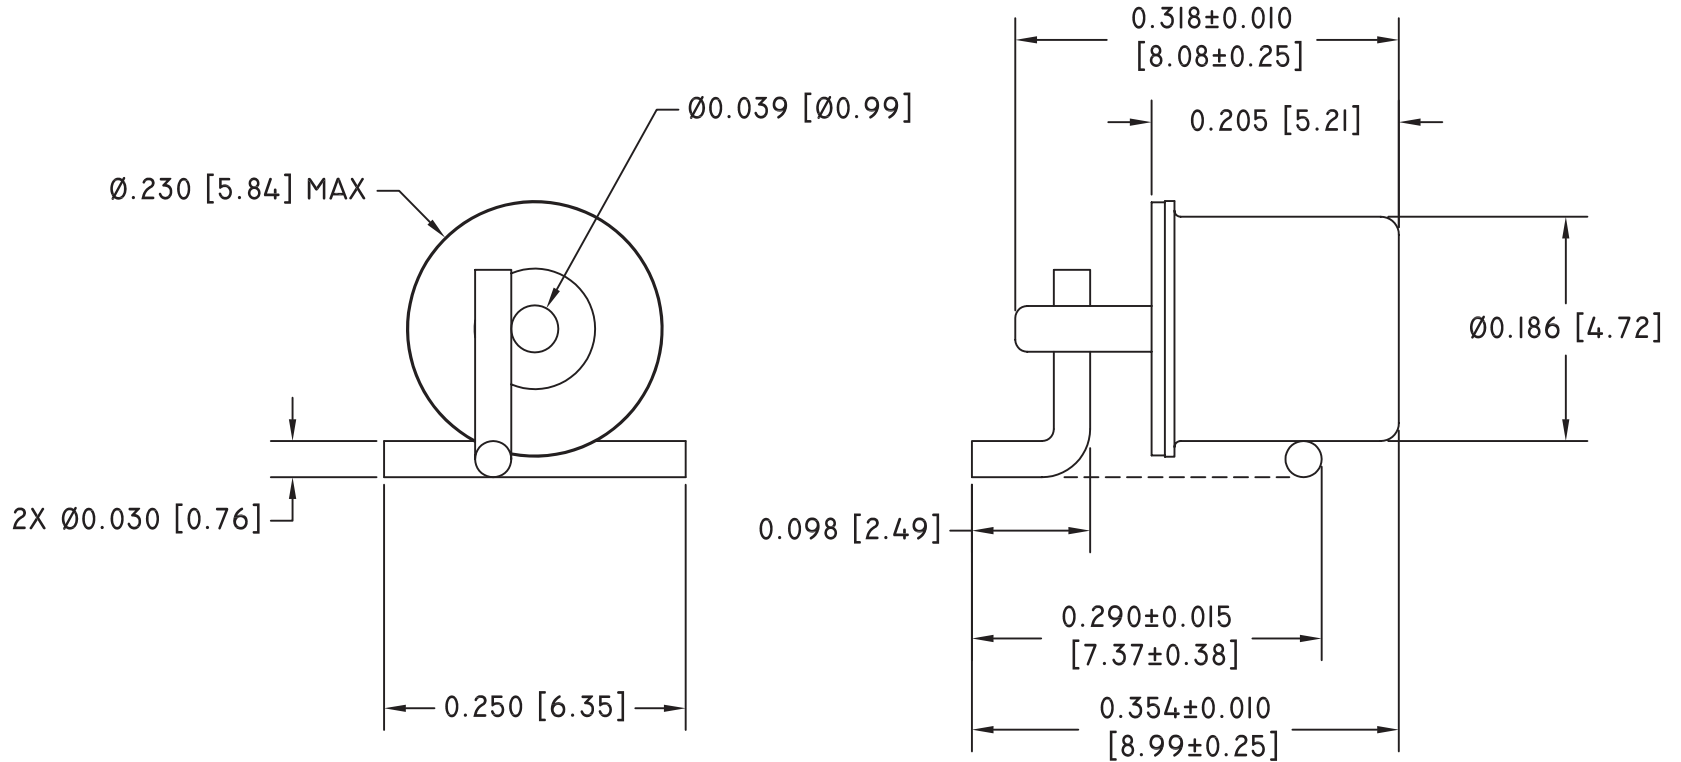

COMUS INTERNATIONAL

454 ALLWOOD ROAD, CLIFTON, NEW JERSEY 07012

TEL. (973) 777-6900

| | | |
|-------------|-----------|------|
| ENGINEERING | | |
| QUALITY | | |
| PRODUCTION | | |
| SALES | | |
| APPROVAL | SIGNATURE | DATE |

UNSPECIFIED TOLERANCES
 DECIMAL: .XX ± .01 [.25]
 .XXX ± .005 [.13]
 FRACTIONAL: ± 1/64 [.40]
 ANGULAR: ± 1/2°

| | | | |
|---|----------------|-------------------|--------------------|
| REF.: | SCALE: NONE | DRAWN BY: L.L. | DATE 11/07/2005 |
| TITLE: MOVEMENT/VIBRATION SENSOR; SURFACE MOUNT | | | |
| DRAWING #: | | | AG2401-6 |

SUNSTAR传感与控制 <http://www.sensor-ic.com/> TEL:0755-83376549 FAX:0755-83376182 E-MAIL:szss200163.com