

SS0837 OTP 4-bit Microcontroller with LCD Driver

Features


- SS0837-based single-chip 4-bit microcontroller with LCD driver
- ROM: 2048 × 16 bits
- RAM: 256 × 4 bits (Data memory)
- Operation voltage: 2.4V - 3.4V (Typical 3.0V)
- 16 CMOS I/O pins
 - CMOS or Open Drain (option setting)
- 4 level subroutine nesting (including interrupts)
- Two 8-bit timer/counter with pre-divider circuit
- Oscillator warm-up timer
- 4 priority interrupt sources:
 - External interrupt (falling edge)
 - Timer0 interrupt
 - Timer1 interrupt
 - PortB interrupt (falling edge)
- Oscillator
 - 32.768KHz crystal or 262K RC (option setting)
- Instruction cycle time:
 - 4/32.768KHz (= 122μs) for 32.768KHz OSC clock
 - 4/262KHz (= 15μs) for 262KHz OSC clock
- LCD driver:
 - 4 × 26 (1/4 duty, 1/3 bias or 1/3 duty, 1/2 bias)
- Two low power operation modes: HALT or STOP mode
- Built-in alarm generator carrier frequency:
 - 2KHz or 4KHz (option setting)
- Low power consumption (I_{op} < 30μA, 32.768KHz, 3V)
- Bonding option for multi-code software
- Available in CHIP FORM

General Description

SS0837 is a single-chip microcontroller integrated with an driver, I/O port, and program ROM.

4-bit CPU core, SRAM, timer, alarm generator, LCD

Pad Configuration

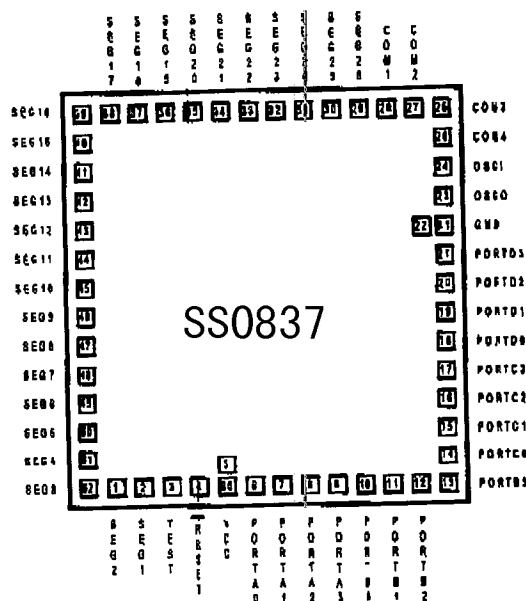

SS0837

Absolute Maximum Rating*

DC Supply Voltage -0.3V to +7.0V
 Input Voltage -0.3V to $V_{DD}+0.3V$
 Operating Ambient Temperature ... -10°C to +60°C
 Storage Temperature -55°C to +125°C

***Comments**

Stresses above those listed under "Absolute Maximum Ratings" may cause permanent damage to this device. These are stress ratings only. Functional operation of this device under these or any other conditions above those indicated in the operational sections of this specification is not implied or intended. Exposure to the absolute maximum rating conditions for extended periods may affect device reliability.

DC Electrical Characteristics ($V_{DD} = 3.0V$, $GND = 0V$, $T_A = 25^\circ C$, $F_{osc} = 32.768KHz$, unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Operating Voltage	V_{DD}	2.5	3	3.4	V	
Operating Current	I_{OP}		20	30	μA	All output pins unload execute NOP instruction
Standby Current	I_{SS1}		15	25	μA	All output pins unload (HALT mode) exclude LCD current
Standby Current	I_{SS2}			1	μA	All output pins unload (STOP mode) LCD off, no current
Low-voltage detected	V_{LV}	1.7	2.0	2.3	V	
Input High Voltage	V_{IH}	$0.7 \times V_{DD}$		$V_{DD} + 0.3$	V	PORTA, PORTB, PORTC, PORTD
Input Low Voltage	V_{IL}	$GND - 0.3$		$0.2 \times V_{DD}$	V	PORTA, PORTB, PORTC, PORTD
Output High Voltage	V_{OH1}	2.3			V	PORTA, PORTB, PORTC ($I_{OH} = 15\mu A$)
Output Low Voltage	V_{OL1}			0.2	V	PORTA, PORTB, PORTC ($I_{OL} = 300\mu A$)
Output High Voltage	V_{OH2}	2.1			V	BD/ $\overline{BD}$ (set PA.1 and PA.2 to be ALARM output), $I_{OH} = 2mA$
Output Low Voltage	V_{OL2}			0.9	V	BD/ $\overline{BD}$ (set PA.1 and PA.2 to be ALARM output), $I_{OL} = 2mA$
Output High Voltage	V_{OH3}	2.8			V	SEGx, $I_{OH} = 3\mu A$, SEG1 - 4 to be output port (for reference only)
Output Low Voltage	V_{OL3}			0.2	V	SEGx, $I_{OL} = 3\mu A$, SEG1 - 4 to be output port (for reference only)
Output High Voltage	V_{OH4}	2.8			V	COMx, $I_{OH} = 8\mu A$ (for reference only)
Output Low Voltage	V_{OL4}			0.2	V	COMx, $I_{OL} = 8\mu A$ (for reference only)
LCD Lighting	I_{LCD}		6.5	7.5	μA	HALT mode

Note:1. Operation frequency vs. I_{SS1}

$$I_{SS1x} = (\text{Frequency}/32.768KHz) * I_{SS1} * 0.8$$

2. Operation frequency vs. I_{OP}

$$I_{OPx} = (\text{Frequency}/32.768KHz) * I_{OP} * 0.8$$

3. HLM vs. I_{OP} , I_{SS1} and I_{SS2}

$$\text{If HLM} = 1, I_{OPx} = I_{OP} * 2, I_{SS1x} = I_{SS1} * 2, I_{SS2x} = I_{SS1} * 2$$


SS0837

AC Characteristics ($V_{DD} = 3.0V$, $GND = 0V$, $T_A = 25^\circ C$, $F_{osc} = 32.768KHz$, unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Oscillation Start Time	T_{STT}		2	5	s	
Halt Time	T_{HTT}		0		s	I_{DD} reduces to I_{sb1} after instruction executing
Stop Time	T_{SPT}		0		s	I_{DD} reduces to I_{sb2} after instruction executing
Frequency Stability	$ \Delta F /F$			1	PPM	$ F(3.0)-F(2.4) /F(3.0)$, crystal oscillator (for reference only)
Frequency Variation	$ \Delta F /F$			10	PPM	$C1 = 5 - 25P$ (for reference only)

AC Characteristics ($V_{DD} = 3.0V$, $GND = 0V$, $T_A = 25^\circ C$, $F_{osc} = 26.2KHz$, unless otherwise specified)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Oscillation Start Time	T_{STT}			2	ms	
Halt Time	T_{HTT}		0		s	I_{DD} reduces to I_{sb1} after instruction executing
Stop Time	T_{SPT}		0		s	I_{DD} reduces to I_{sb3} after instruction executing
Frequency Stability	$ \Delta F /F$			10	%	$ F(3.0)-F(2.4) /F(3.0)$, RC oscillator (for reference only)
Frequency Variation	$ \Delta F /F$			15	%	variation caused by process variation (for reference only)

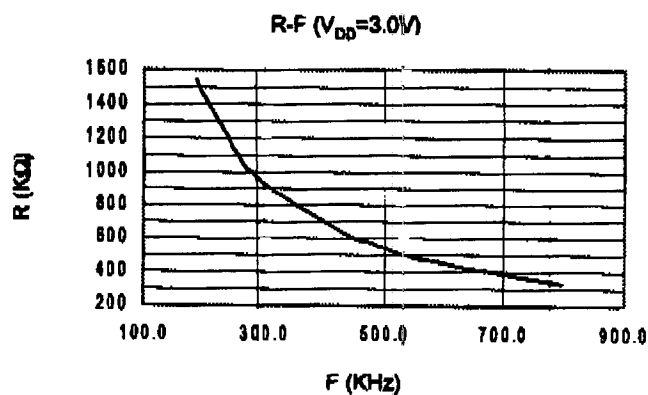Typical RC oscillator Resistor vs. Frequency: (for reference only)

欢迎索取免费详细资料、设计选型指南和光盘、样品；产品繁多未能尽录，欢迎来电查询。

[中国传感器科技信息网：HTTP：//WWW.SENSOR-IC.COM/](http://WWW.SENSOR-IC.COM/)

[工控安防网：HTTP：//WWW.PC-PS.NET/](http://WWW.PC-PS.NET/)

[消费电子专用电路网：HTTP://WWW.SUNSTARE.COM/](http://WWW.SUNSTARE.COM/)

E-MAIL：xjr5@163.com szss20@163.com

MSN：suns8888@hotmail.com

QQ：195847376

地址：深圳市福田区福华路福庆街鸿图大厦 1602 室

电话：0755-83376549 83376489 83387030 83387016

传真：0755-83376182 83338339 邮编：518033 手机：(0)13902971329

深圳展销部：深圳华强北路赛格电子市场 2583 号 TEL/FAX：
0755-83665529 25059422

北京分公司：北京海淀区知春路 132 号中发电子大厦 3097 号

TEL：010-81159046 82615020 13501189838 FAX：010-82613476

上海分公司：上海市北京东路 668 号上海赛格电子市场 2B35 号

TEL：021-28311762 56703037 13701955389 FAX：021-56703037

西安分公司：西安高新开发区 20 所(中国电子科技集团导航技术研究所)
西安劳动南路 88 号电子商城二楼 D23 号

TEL：029-81022619 13072977981 FAX:029-88789382

成都：TEL:(0)13717066236

技术支持：0755-83394033 13501568376