



v02.0705

# HMC210MS8 / 210MS8E

## GaAs MMIC VOLTAGE-VARIABLE ATTENUATOR, 1.5 - 2.3 GHz



5

ATTENUATORS - SMT

### Typical Applications


The HMC210MS8 / HMC210MS8E is ideal for:

- Base Station Infrastructure
- Portable Wireless
- MMDS

### Features

- Single Positive Voltage Control: 0 to +2.5V
- High Attenuation Range: >50 dB @ 1.9 GHz
- High Input IP3: +15 dBm Typical (All Attenuation States)
- Ultra Small Package: MSOP

### Functional Diagram

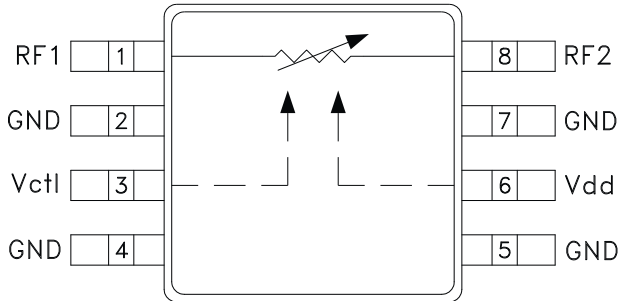

### General Description

The HMC210MS8 & HMC210MS8E are miniature absorptive voltage variable attenuators in 8-lead MSOP packages. The device operates with a positive supply voltage (+2.5V), and a positive control voltage. A unique feature is the high third order intercept point for all attenuation states. Operation up to 2.3 GHz is possible with a reduced attenuation range of 31 dB.

### Electrical Specifications, $T_A = +25^\circ C$ , $V_{dd} = +2.5 V_{dc}$ , 50 Ohm System

Parameter	Condition	Min.	Typical	Max.	Units
Insertion Loss (VCTL = 0 V Min. Atten.)	1.8 - 2.0 GHz		3.3	4.9	dB
	1.7 - 2.1 GHz		3.4	5.5	dB
	1.5 - 2.3 GHz		5.0	7.5	dB
Attenuation Range (VCTL = 0 to +2.5 V)	1.8 - 2.0 GHz	44	55		dB
	1.7 - 2.1 GHz	39	43		dB
	1.5 - 2.3 GHz	31	40		dB
Return Loss (VCTL = 0 to +2.5 V)	1.5 - 2.0 GHz		9		dB
	2.0 - 2.3 GHz		6		dB
Input Power for 0.1 dB Compression (f = 1.9 GHz)	Min Atten.		15		dBm
	Atten. >2.0		-5		dBm
Input Power for 1.0 dB Compression (f = 1.9 GHz)	Min Atten.	17	20		dBm
	Atten. >2.0	0	3		dBm
Input Third Order Intercept (f = 1.9 GHz, Two-tone Input Power = +5 dBm Each Tone)	Min Atten.	30	35		dBm
	Atten. >2.0	10	15		dBm
Switching Characteristics tRISE, tFALL (10/90% RF) tON, tOFF (50% CTL to 10/90% RF)	1.5 - 2.3 GHz		0.9		$\mu S$
			2.6		$\mu S$

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:  
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373


Order On-line at [www.hittite.com](http://www.hittite.com)




# HMC210MS8 / 210MS8E

## GaAs MMIC VOLTAGE-VARIABLE ATTENUATOR, 1.5 - 2.3 GHz


**Relative Attenuation vs. Control Voltage @ 1.9 and 2.2 GHz**

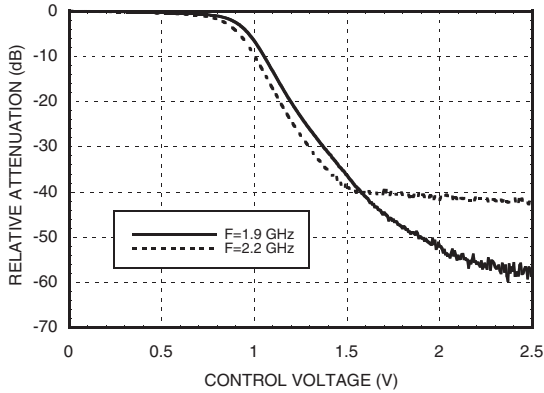

**Input IP3 vs. Control Voltage @ 1.9 GHz**

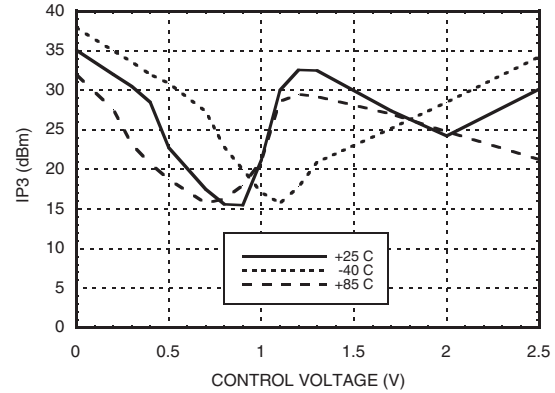


**Attenuation vs. Temperature Normalized to +25° C @ 1.9 GHz**

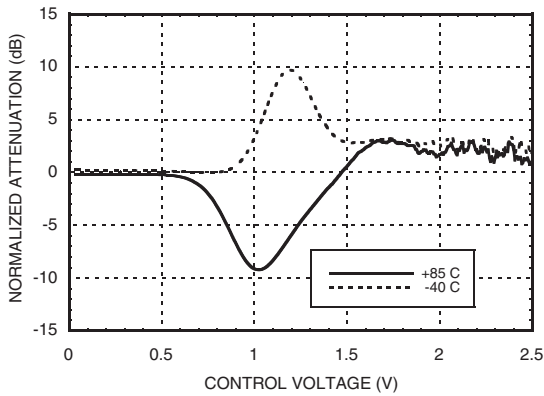


**Typical Input P1dB Compression @ 1.9 GHz vs. Temperature**

Input Power for 1 dB Compression Point						
Test Condition (1.9 GHz)	VCTL (Vdc)	Vdd (Vdc)	+25C	+85C	-40C	Units
Min. Attenuation	0.0	+2.5	20	20	21	dBm
Max. Attenuation	+2.5	+2.5	19	16	25	dBm
Worst Case P1dB	+1.0	+2.5	3	4	3	dBm

**Broadband Insertion Loss**

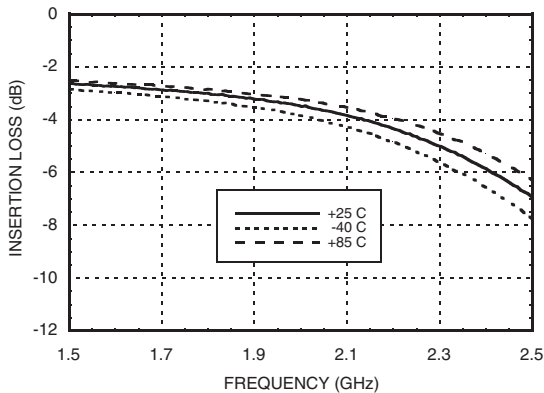

**Broadband Maximum Relative Attenuation and Return Loss**

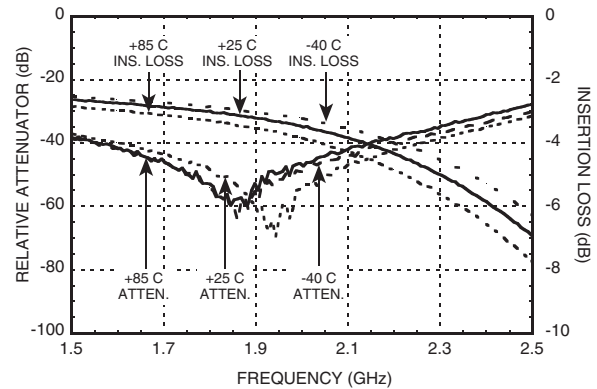

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:  
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373

Order On-line at [www.hittite.com](http://www.hittite.com)



## HMC210MS8 / 210MS8E


### GaAs MMIC VOLTAGE-VARIABLE ATTENUATOR, 1.5 - 2.3 GHz

5


ATTENUATORS - SMT

#### Typical Performance for 1.9 GHz Applications

**Attenuation vs. Control Voltage @ 1.9 GHz**

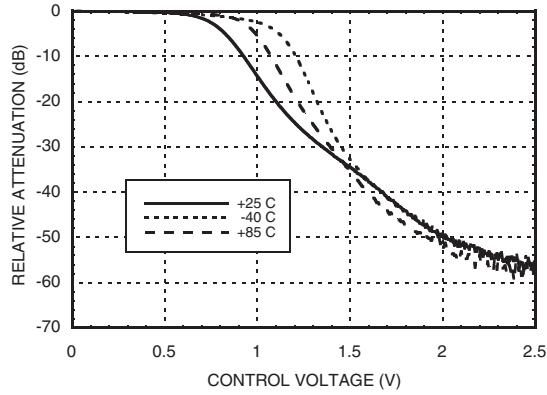


**Return Loss vs. Control Voltage @ 1.9 GHz**

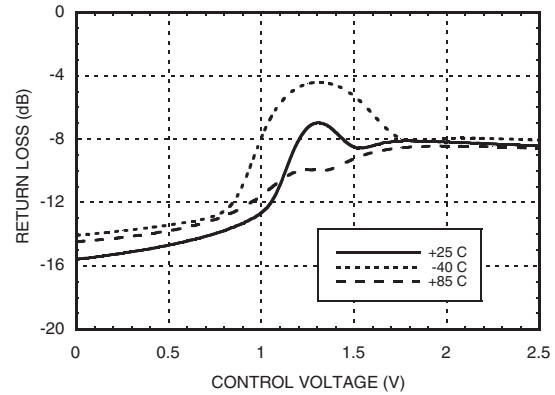


#### Typical Performance for 2.2 GHz Applications

**Attenuation vs. Control Voltage @ 2.2 GHz**

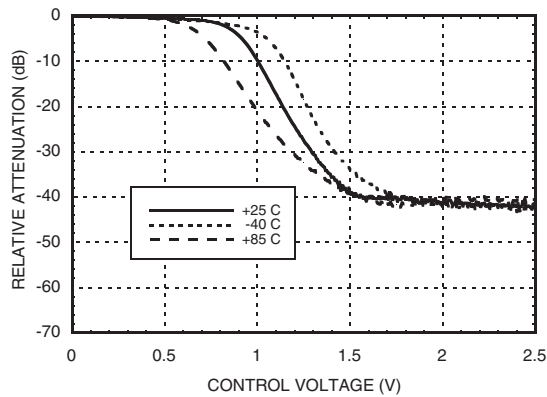

**Return Loss vs. Control Voltage @ 2.2 GHz**

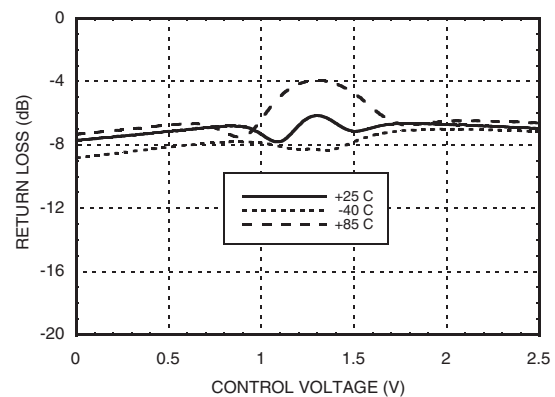

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:  
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373

Order On-line at [www.hittite.com](http://www.hittite.com)



# HMC210MS8 / 210MS8E

## GaAs MMIC VOLTAGE-VARIABLE ATTENUATOR, 1.5 - 2.3 GHz

### Absolute Maximum Ratings

VCTL	-0.2 Vdc to Vdd
Vdd	+8 Vdc
Maximum Input Power (Vdd = +2.5 Vdc)	+26 dBm @ Min. Attenuation, VCTL = +0.0V +20 dBm @ Atten. >2 dB
Storage Temperature	-65 to +150 °C
Operating Temperature	-40 to +85 °C

### Control and Bias Voltage



VCTL	0 to +2.5 Vdc @ -100 μA to +100 μA
Vdd	+2.5 Vdc ± 0.1 Vdc @ +100 μA

\*Note: DC blocking capacitors are required for RF ports. 100 pF RF chip capacitors (0603 size) are recommended on RF1 & RF2 ports..



ELECTROSTATIC SENSITIVE DEVICE  
OBSERVE HANDLING PRECAUTIONS

### Outline Drawing

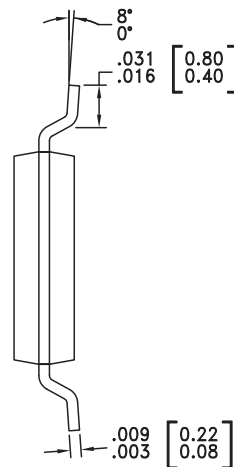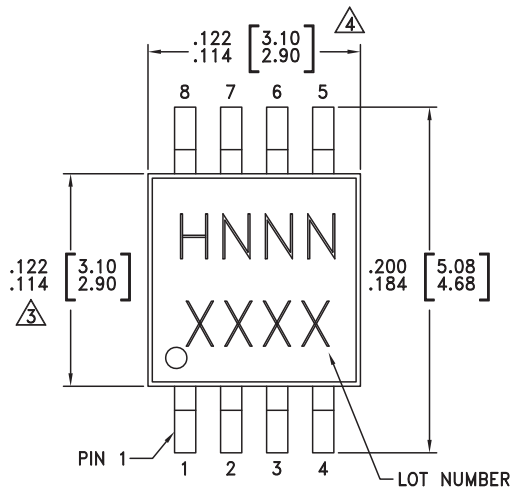

#### NOTES:

1. LEADFRAME MATERIAL: COPPER ALLOY
2. DIMENSIONS ARE IN INCHES [MILLIMETERS]
3. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.15mm PER SIDE.
4. DIMENSION DOES NOT INCLUDE MOLDFLASH OF 0.25mm PER SIDE.
5. ALL GROUND LEADS MUST BE SOLDERED TO PCB RF GROUND.

### Package Information

Part Number	Package Body Material	Lead Finish	MSL Rating	Package Marking <sup>[3]</sup>
HMC210MS8	Low Stress Injection Molded Plastic	Sn/Pb Solder	MSL1 <sup>[1]</sup>	H210 XXXX
HMC210MS8E	RoHS-compliant Low Stress Injection Molded Plastic	100% matte Sn	MSL1 <sup>[2]</sup>	H210 XXXX

[1] Max peak reflow temperature of 235 °C

[2] Max peak reflow temperature of 260 °C

[3] 4-Digit lot number XXXX

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:  
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373

Order On-line at [www.hittite.com](http://www.hittite.com)



# HMC210MS8 / 210MS8E


## GaAs MMIC VOLTAGE-VARIABLE ATTENUATOR, 1.5 - 2.3 GHz



5

ATTENUATORS - SMT

### Evaluation Circuit Board

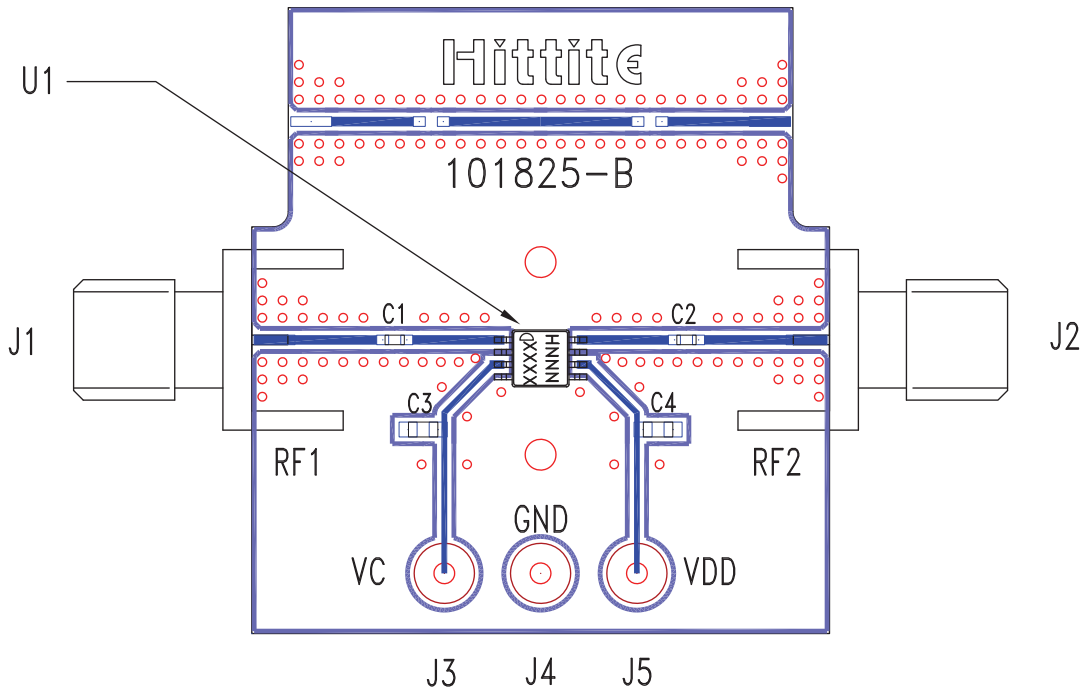

### List of Materials for Evaluation PCB 101827 [1]

Item	Description
J1, J2	PCB Mount SMA RF Connector
J3 - J5	DC PIN
C1, C2	330 pF capacitor, 0402 package
C3, C4	10,000 pF capacitor, 0603 package
U1	HMC210MS8 / HMC210MS8E VVA
PCB [2]	101825 Eval Board

[1] Reference this number when ordering complete evaluation PCB

[2] Circuit Board Material: Rogers 4350

The circuit board used in the final application should be generated with proper RF circuit design techniques. Signal lines at the RF ports should be 50 ohm impedance and the package ground leads and package bottom should be connected directly to the PCB RF ground plane, similar to that shown above. The evaluation circuit board shown above is available from Hittite Microwave Corporation upon request.

For price, delivery, and to place orders, please contact Hittite Microwave Corporation:  
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373

Order On-line at [www.hittite.com](http://www.hittite.com)



## HMC210MS8 / 210MS8E

**GaAs MMIC VOLTAGE-VARIABLE  
ATTENUATOR, 1.5 - 2.3 GHz**

**Notes:**

5

ATTENUATORS - SMT

*For price, delivery, and to place orders, please contact Hittite Microwave Corporation:  
20 Alpha Road, Chelmsford, MA 01824 Phone: 978-250-3343 Fax: 978-250-3373*

*Order On-line at [www.hittite.com](http://www.hittite.com)*

SUNSTAR射频通信 <http://www.rfoe.net/> TEL:0755-83397033 FAX:0755-83376182 E-MAIL: szss20@163.com